


## **MGB-L0-ARA-AA2A1-S1-R-116300 (Order no. 116300)**

**Interlocking module MGB-L0-ARA..., with 2 pushbuttons, emergency stop, incl. label carrier, RC18**

- ▶ Interlocking (without guard locking)
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Emergency stop according to ISO 13850
- ▶ 2 pushbuttons (illuminated, ye, wh)
- ▶ incl. adhesive labels
- ▶ With plug connector RC18
- ▶ Unicode

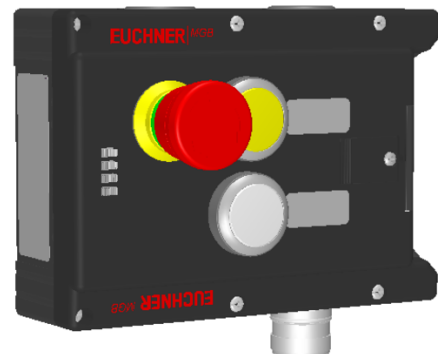

### **Guard locking type**

MGB- The bolt tongue in the handle module is moved into and out of the interlocking module by  
L0... actuating the door handle. The door arm is not locked in the locked position.

### **Door hinge**

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

### **LED indicator**

The LED indicator indicates all important system and status information.

### **Monitoring outputs**

OT Bolt tongue inserted into the evaluation module  
OI Diagnostics; there is a fault

### **Emergency stop device**

S1 2 positively driven contacts, emergency stop with turn-to-reset, not illuminated


### **Pushbuttons**

S2 1 NO contact, yellow, illuminated  
S3 1 NO contact, white, illuminated

### **Adhesive labels**

Devices with adhesive labels have pre-formed recesses. The adhesive labels enclosed (standard size 12.5 x 27 mm) can be affixed in these recesses.

## Dimensional drawings

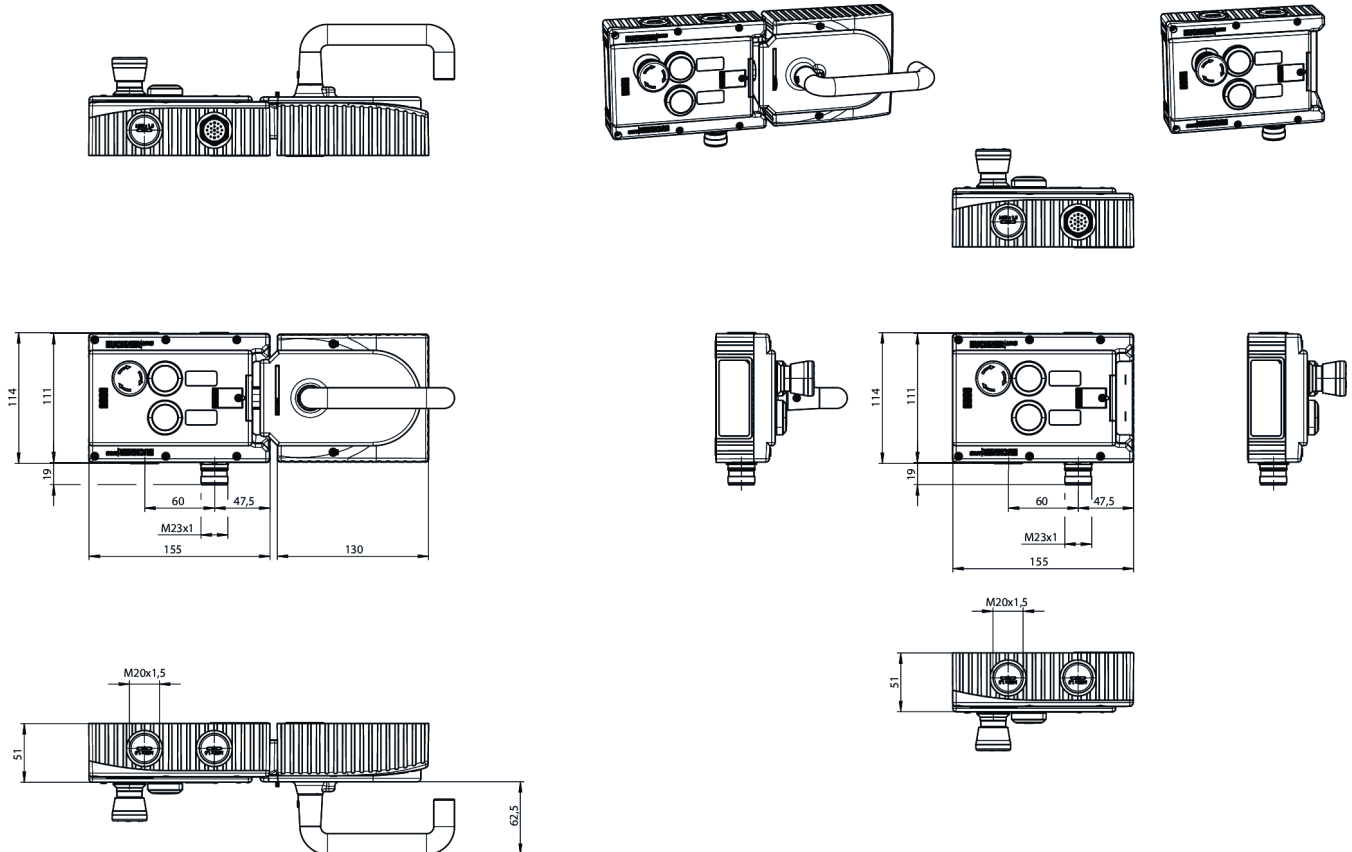

## Connection examples

