

## MGB2-L2-MLI-U-YB1A1-DA-L-156381 (Order no. 156381)

### Locking module MGB2-L2-MLI... (2 pushbuttons, emergency stop, open-circuit current principle, door hinge on left)

- ▶ Guard locking for the protection of persons or processes
- ▶ Locking module MGB2 for connection to a bus module MBM
- ▶ Interlocking with monitored guard locking
- ▶ Category 4/PL e for the evaluation of all safety functions
- ▶ 1 illuminated emergency stop according to ISO 13850
- ▶ 2 illuminated pushbuttons
- ▶ 3 cut-outs for slide-in labels
- ▶ Adjustable door hinge; factory setting: left
- ▶ Unicode
- ▶ Compatible with all Modular devices



### Guard locking type

MGB2- Guard locking by solenoid force. Activation of guard locking by applying voltage to the guard  
L2... locking solenoid. (open-circuit current principle)

### Door hinge

On the locking modules, the door hinge can be changed from right to left and vice versa at any time with little effort.


### Lens set

The color of the pushbuttons can be selected using the lens set 120344 included (5 colors).

### Slide-in labels

The user can produce custom labeling using the enclosed slide-in labels. (3 pcs., blank)

## Dimensional drawings

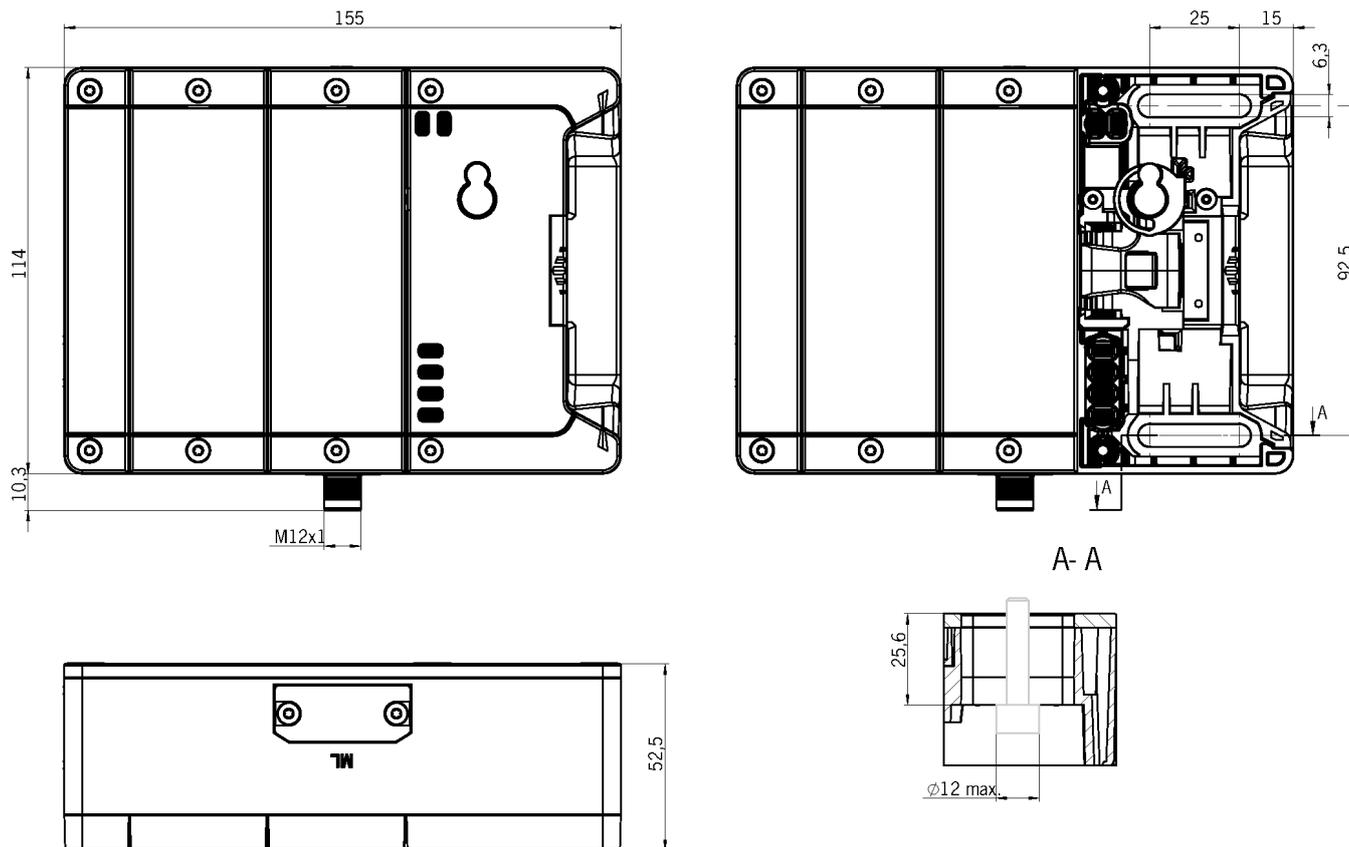

## Dimensional drawings

