


SPIRALLEITG M STECKVERB 9M-106392 (Order no. 106392)

Connecting cable for enabling switch ZSM with plug connector RC17

- ▶ Female plug RC17, 17-pin, and male plug HAN10A, 10-pin
- ▶ Straight plug connector
- ▶ PUR cable
- ▶ Coiled cable
- ▶ Cable length 9 m (extended)

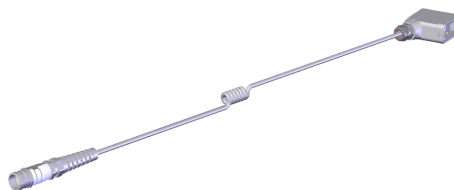

Technical data

Electrical connection values

Cable shielding	Yes (Cu thread covering, optical coverage approx. 90%)
specific conductor resistance	max. 145 Ω/km

Mechanical values and environment

Conductor cross-section	0.14 mm ²
Number of conductors	12
Dynamic bending radius	15 x cable diameter
Static bending radius	10 x cable diameter
Storage temperature	-40 ... 80 °C
Cable type	coiled
Cable diameter	7.5 mm -0,3 ... +0,3 mm
Cable length	9.0 m (extended)
Sheath color	
	Cable black matte
Drag chain suitability	No
Cable ambient temperature (dynamic)	-10 ... 70 °C
Cable ambient temperature (static)	-40 ... 80 °C
Material	
	Sheath PUR

Connection 1

Connection type	Coupling plug connector
Connection type	Female plug
Plug connector designation	RC17
Cable outlet	straight
Number of pins	17
Degree of protection	IP67 (In the inserted and screwed tight state)
Plug lock	Screw connection

Connection 2

Connection type	Plug connector
Connection type	Male plug
Plug connector designation	HAN10A
Cable outlet	straight
Number of pins	10
Degree of protection	IP68 (In the inserted and screwed tight state)
Plug lock	Clip catch