


N1AW514-M (Order no. 083850)

Single limit switch N1AW, rounded plunger, cable entry M16x1.5

- ▶ Rounded plunger
- ▶ Housing according to DIN 43693
- ▶ 2 x cable entry M16x1.5
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts



Approach direction






Horizontal and vertical

Switching element

514 Snap-action switching contact, 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact


Dimensional drawings

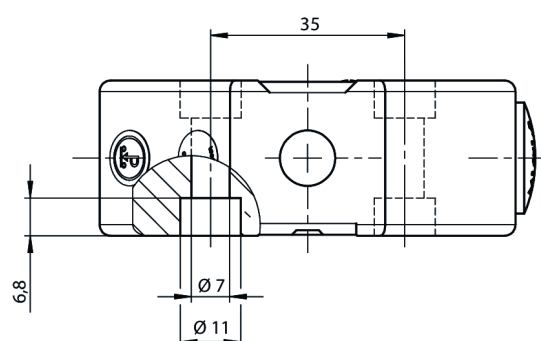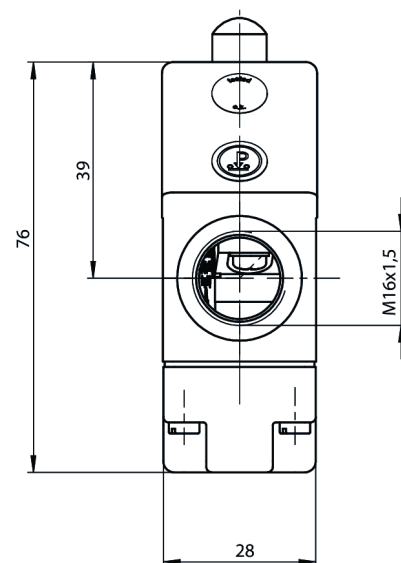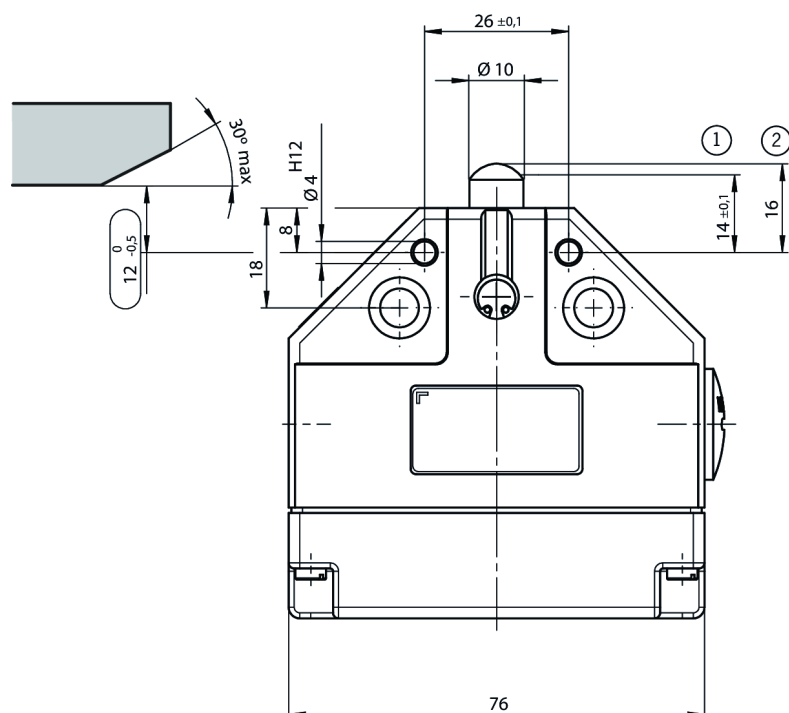


1 Operating point

2 Free position

Connection examples

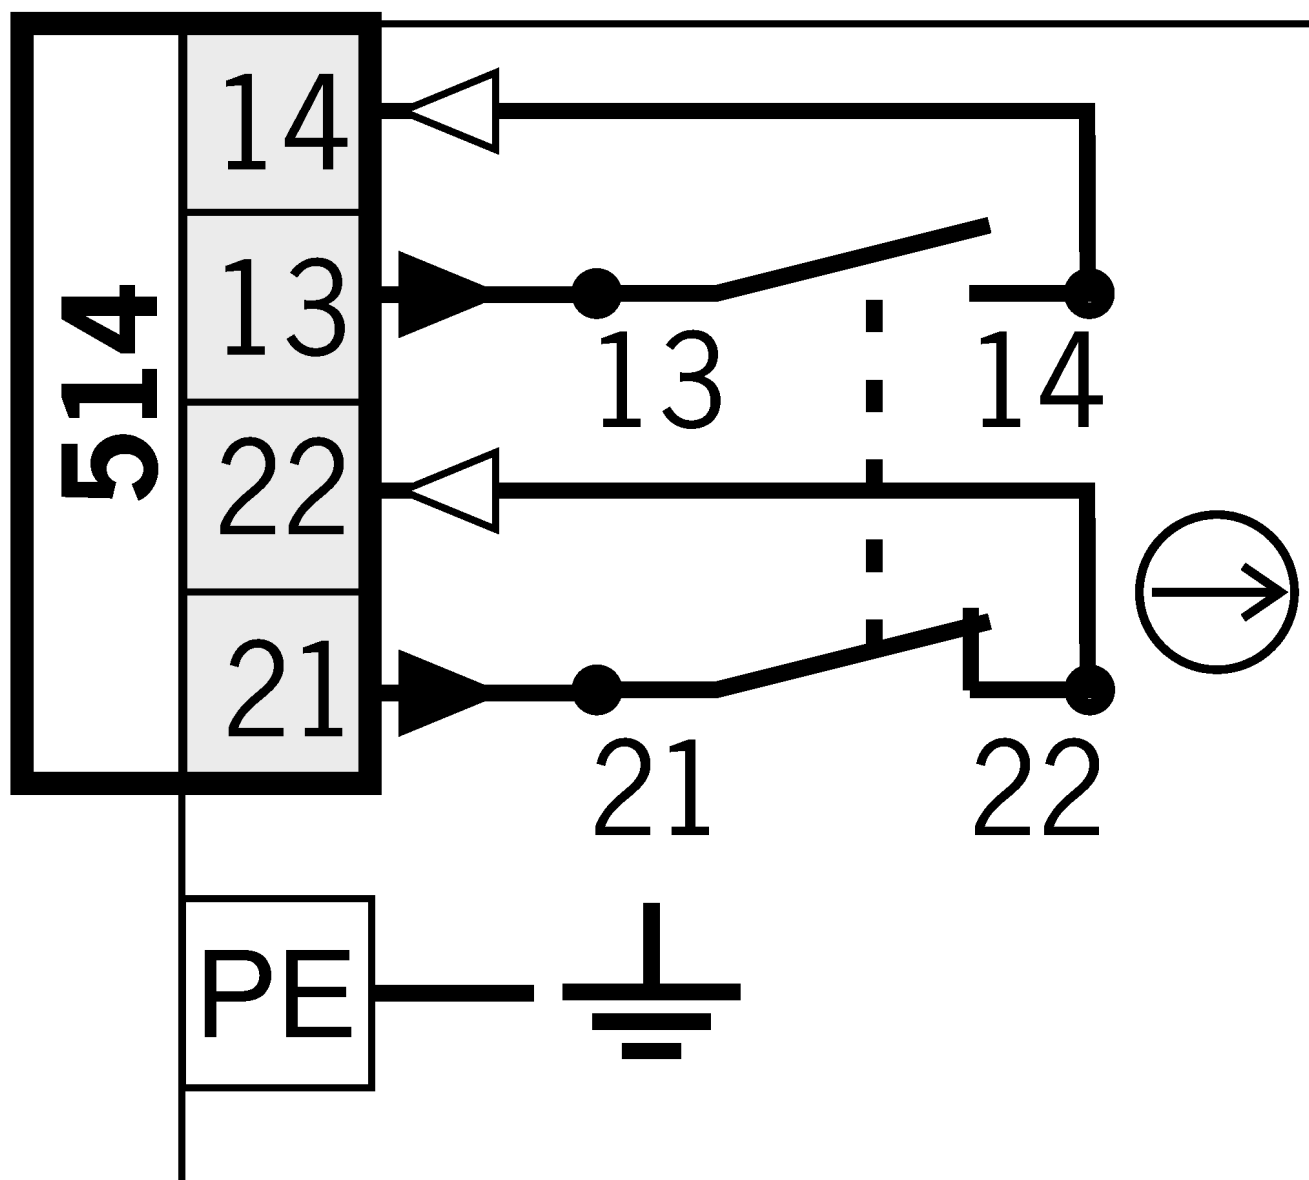

Shift travel diagrams

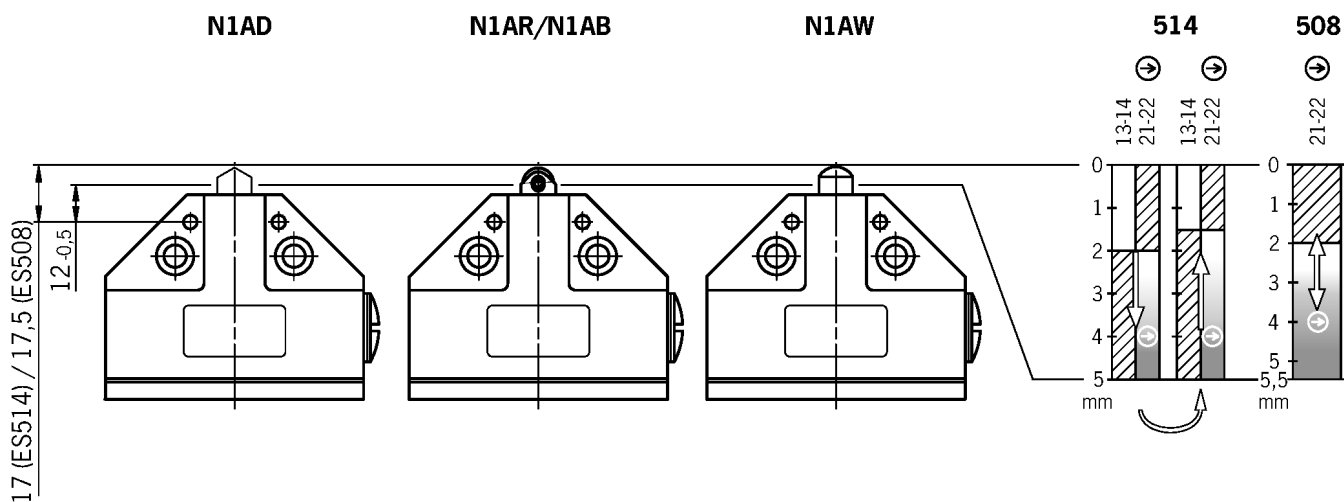

g_Kontakte_geschlossen_sw.eps

Contacts closed