


## MGB-L1HE-APA-R-122089 (Order no. 122089)

### Locking set MGB-L1HE-APA... (guard locking by spring force) with 3 pushbuttons, emergency stop, incl. label carrier, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850
- ▶ 3 illuminated pushbuttons
- ▶ incl. adhesive labels
- ▶ With plug connector RC18
- ▶ With escape release
- ▶ Unicode

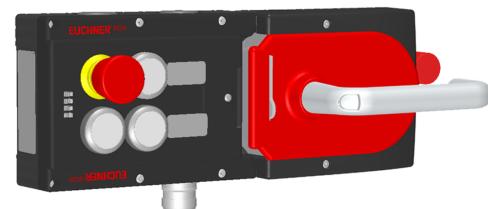

### Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force  
L1... (closed-circuit current principle, mechanically locked).

### Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

### LED indicator

The LED indicator indicates all important system and status information.

### Monitoring outputs

OT Bolt tongue inserted into the evaluation module

OI Diagnostics; there is a fault

### Emergency stop device

S1 2 positively driven contacts, emergency stop with turn-to-reset, not illuminated

### Pushbuttons

S2 1 NO contact, illuminated

S3 1 NO contact, illuminated

S4 1 NO contact, illuminated

### Escape release

The escape release enables people accidentally shut in to open the guard locked door from the danger zone.

### Adhesive labels

Devices with adhesive labels have pre-formed recesses. The adhesive labels enclosed (standard size 12.5 x 27 mm) can be affixed in these recesses.

**Notice**

The interlocking module, handle module and the escape release are each pre-assembled on a mounting plate.