

NZ2RL-538L060 (Order no. 091278)

Safety switch NZ.RL, extended roller plunger, steel roller \varnothing 18 mm, plug connector M26 (SR6)

- ▶ Extended roller plunger, steel roller \varnothing 18 mm
- ▶ Plug connector M26 (SR6), 6-pin + PE
- ▶ 2 pos. driven contact
- ▶ LED indicator: AC/DC 12–60 V red



Approach direction



Horizontal

Can be adjusted in 90° steps


Switching element

538H Slow-action switching contact 2 positively driven contacts \rightarrow

LED indicator

The switch has one freely assignable LED indicator.

Dimensional drawings

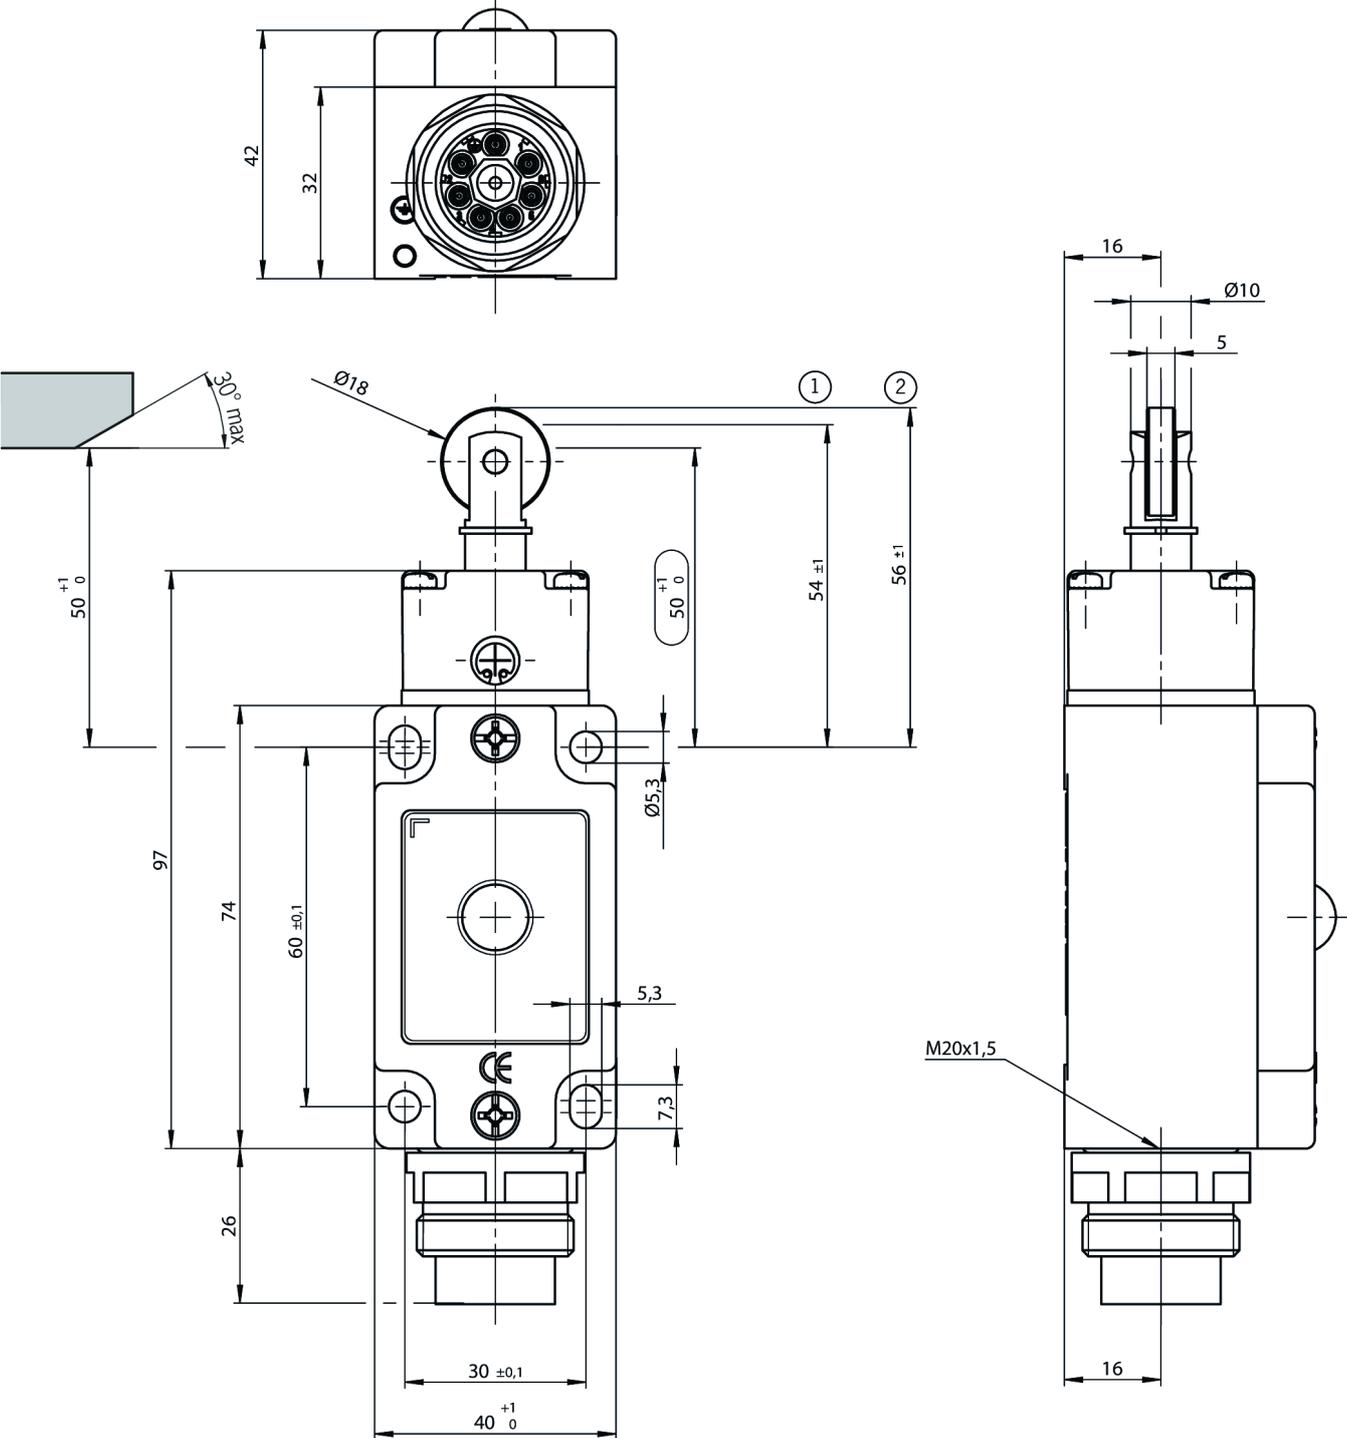

- 1 Operating point
- 2 Free position

Connection examples

