

ZSM2200–100697 (Order no. 100697)

ZSM, pushbuttons, vibration motor, selector switch

- ▶ 3-stage function
- ▶ Vibration signal
- ▶ + and – buttons
- ▶ Selector switch
- ▶ Straight connecting cable, 10 m



3-stage function

Enabling function is active only in the second stage (center position, actuating point). If the pushbutton is released or pushed further (panic function), the enabling is removed (dependent on the wiring, see function sequence).

Vibration signal

The vibration signal is used for tactile feedback of the enabling position.

+ and – buttons

These pushbuttons can be configured individually. For example, for moving axes in the positive or negative direction.



Selector switch

The adjustable detent positions can be used as required for axis, speed or range selection, for example.

Cable

The high-quality connecting cables are available in a straight version.

Dimensional drawings

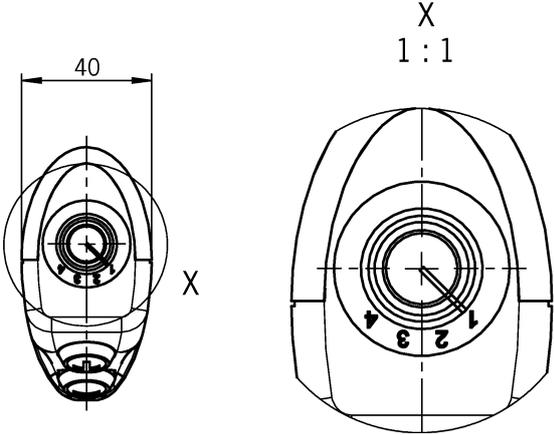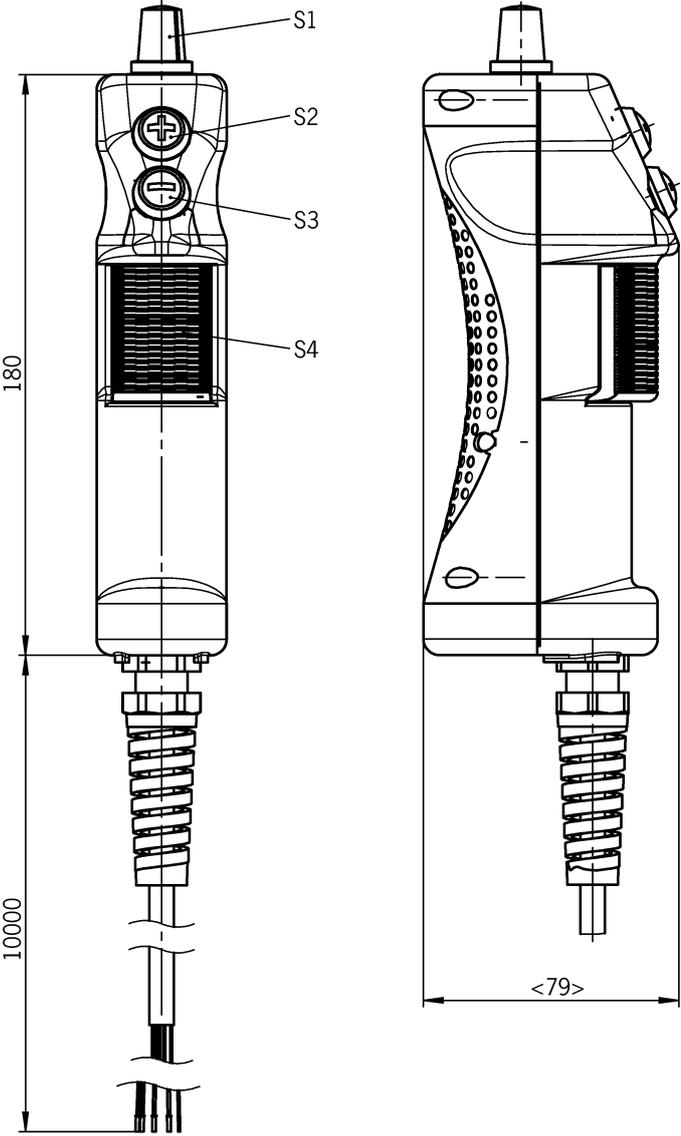

Connection examples

