

CEM-A-LE05R-S2 (Order no. 095792)

Read head CEM-A-LE05... with guard locking without guard lock monitoring without remanence

- ▶ Read head with guard locking without guard lock monitoring
- ▶ Locking force 650 N
- ▶ Without remanence
- ▶ Up to category 4 according to EN ISO 13849-1
- ▶ Two safety screws M5x16 included




Combination options


Suitable for connection to a CES-AZ evaluation unit

Without remanence

Read heads without remanence are de-magnetized when the solenoid is switched off. For this purpose the operating voltage U_B must always be applied.

Approach direction

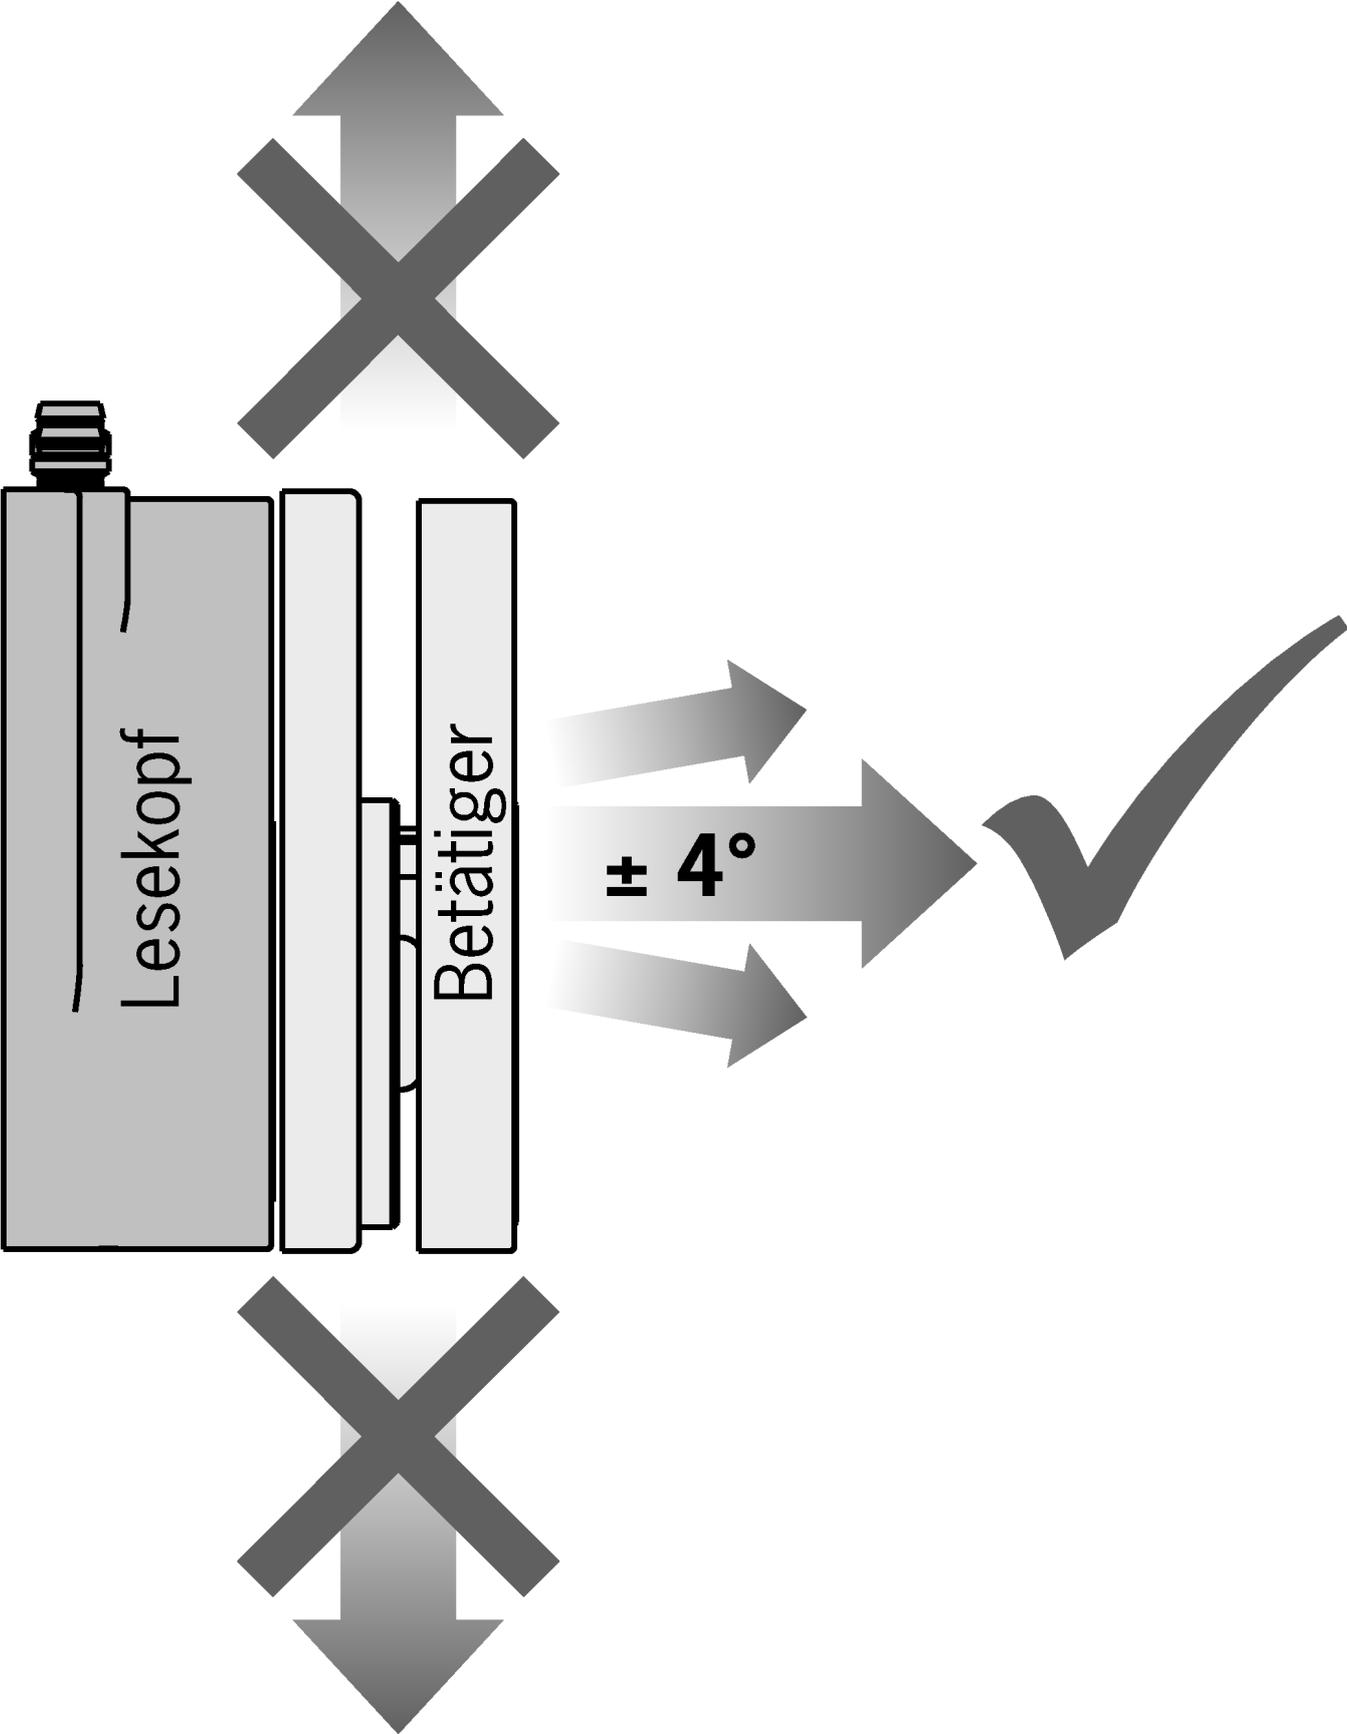

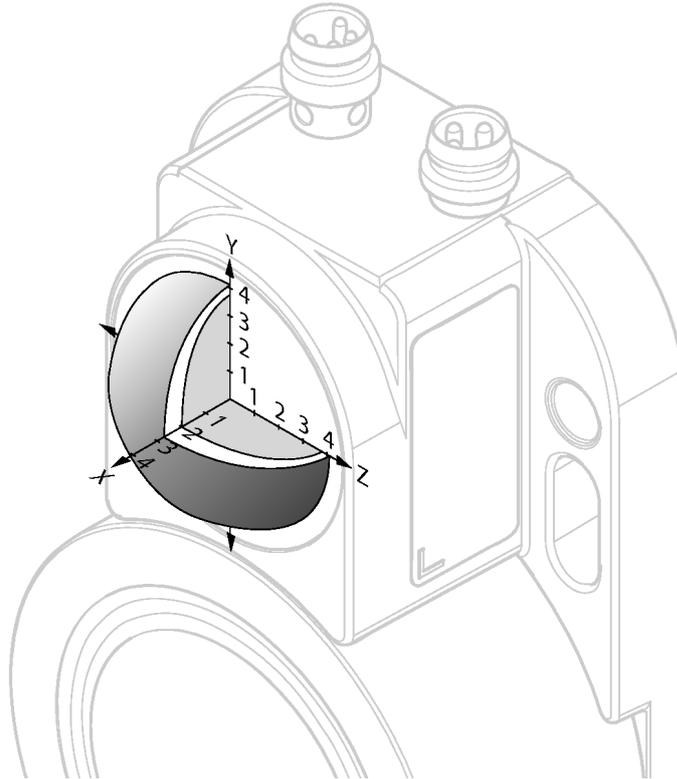Typical operating distance

Note assured release distance $s_{ar} = 20$ mm for internal component failure. Safety outputs are safely switched off.