

AE-SET-LCHN-A1-155865 (Order no. 155865)

Lockout bar and holder for CET actuator



- ▶ Prevents unintentional closing of the door
- ▶ Can be secured with padlocks




The lockout bar can be used to prevent maintenance personnel from being unintentionally locked in the danger zone, for example. The lockout bar is mounted on the CET actuator (CET-A-BWK-50X-096327) when the guard is open, and it can be secured with up to 3 padlocks.

Dimensional drawings


Halterung für CET Sperreinsatz /
Holder for CET lockout device

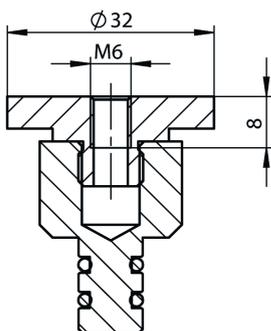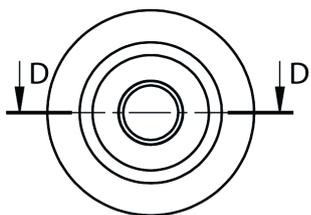

Befestigung rückseitig M6/
mounting on the rear side M6

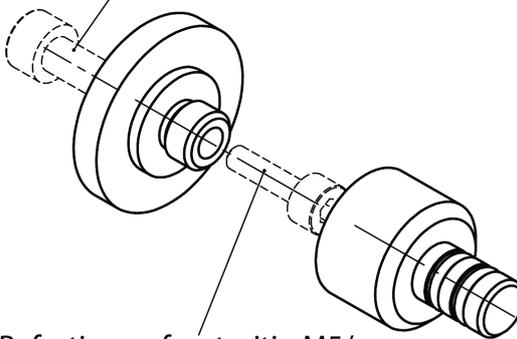

Befestigung frontseitig M5/
mounting on the front side M5

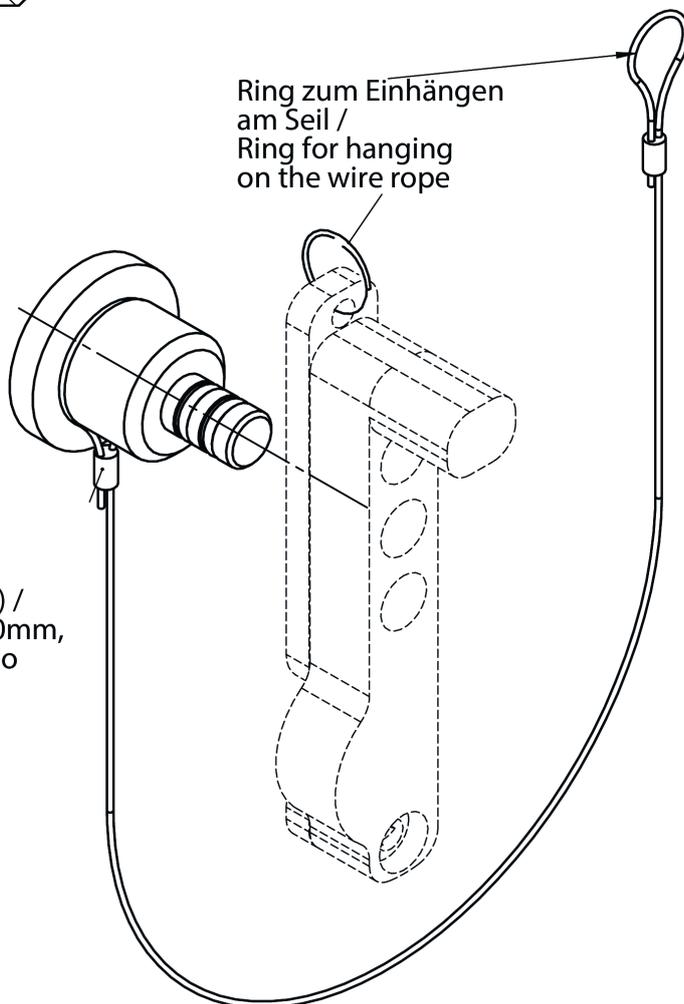

Seil (L = 250mm,
kann an
Aufhängung
befestigt werden) /
Wire rope (L=250mm,
can be attached to
the holder)

Technical data

Mechanical values and environment

Storage temperature	-25 ... 70 °C
---------------------	---------------

AY-CHN-A1-156338 (Order no. 156338)



Mechanical values and environment

Storage temperature	-25 ... 70 °C
---------------------	---------------

Material	Aluminum
----------	----------

Miscellaneous

Additional information

Rope length	Approx. 250 mm
-------------	----------------

AE-L-CET-156429 (Order no. 156429)



Mechanical values and environment

Storage temperature	-25 ... 70 °C
---------------------	---------------

Material	Aluminum
----------	----------

Miscellaneous

Additional information

Shackle diameter	5 mm – 9 mm
------------------	-------------

	3 padlocks can be attached
--	----------------------------