


N1AB514-M (Order no. 087247)

Single limit switch N1AR, roller plunger, steel roller $\varnothing$ 8 mm, cable entry M16x1.5

- ▶ Roller plunger, steel roller $\varnothing$ 8 mm
- ▶ Housing according to DIN 43693
- ▶ 2 x cable entry M16x1.5
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts
- ▶ Ball bearing

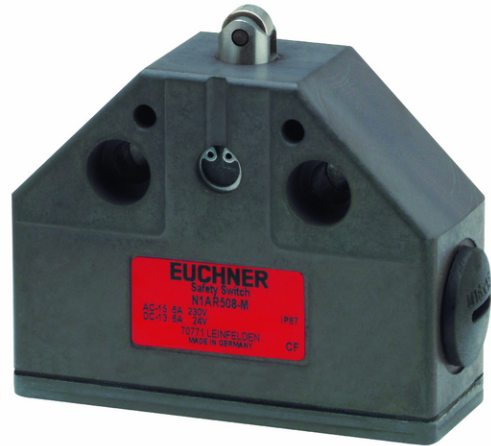

Approach direction



Horizontal

Can be adjusted in 90° steps




Switching element

514 Snap-action switching contact, 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact


Ball bearing

For high approach speeds and long travel distances.


Dimensional drawings

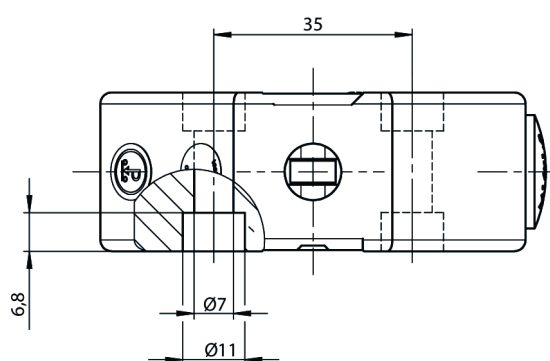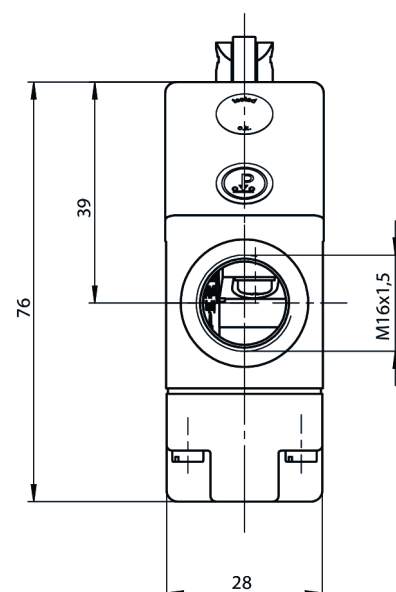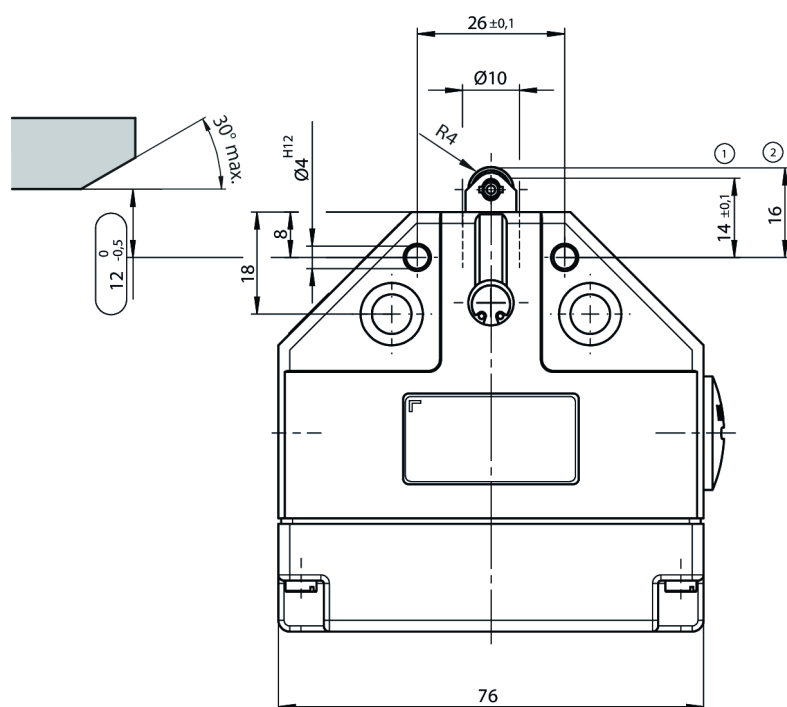

Connection examples

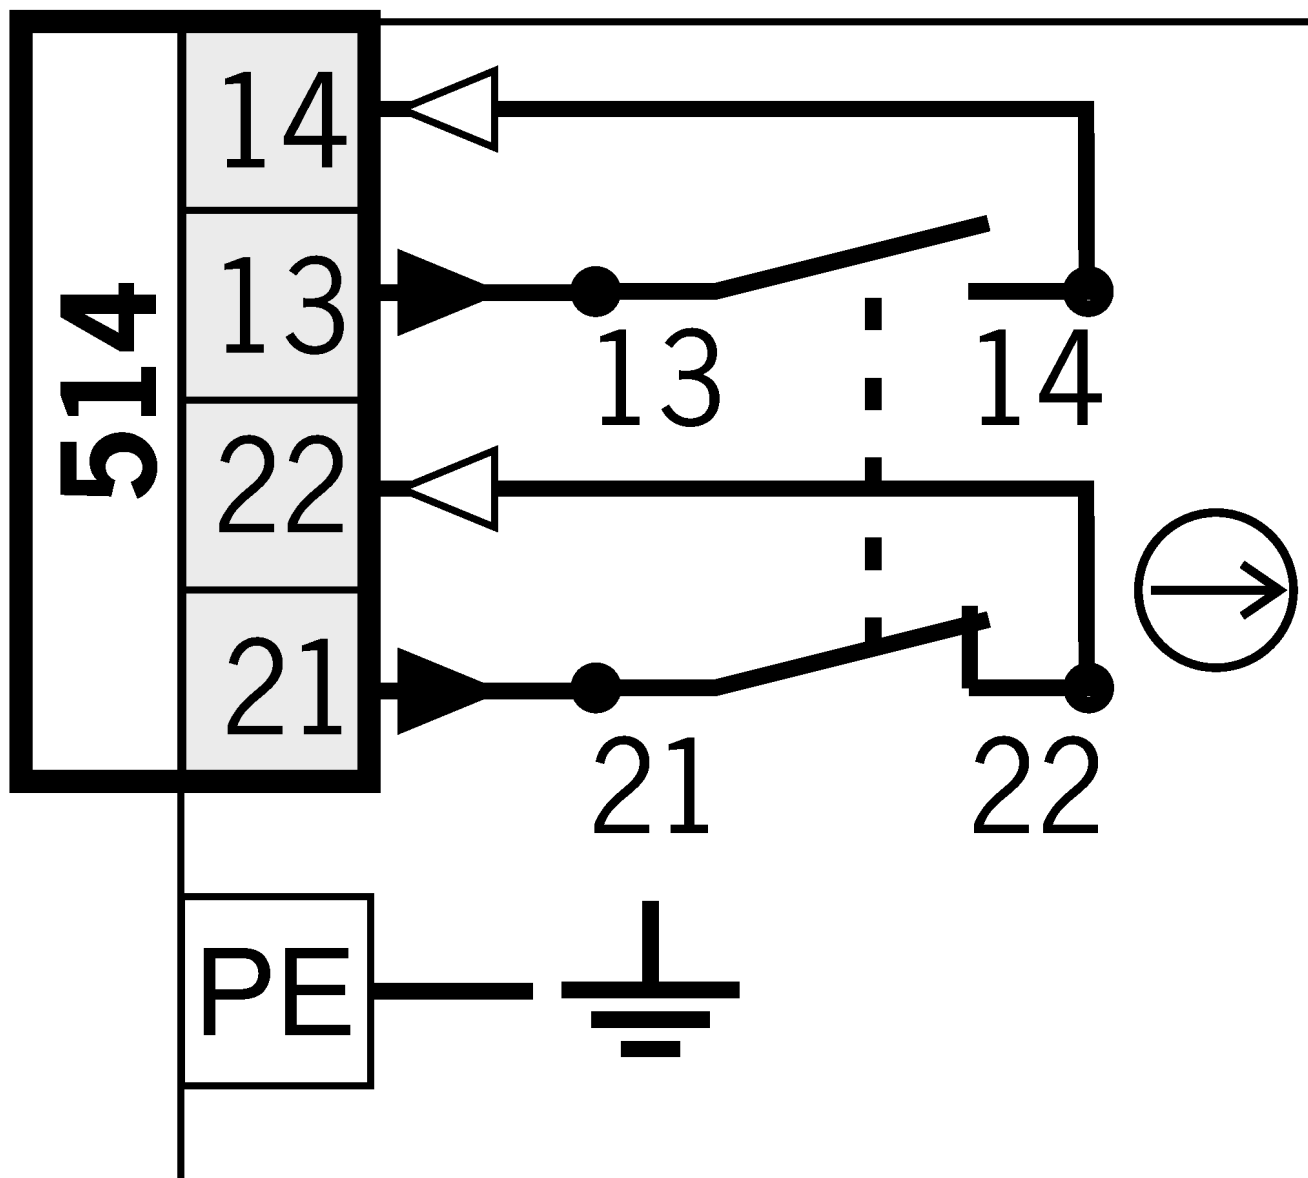

Shift travel diagrams

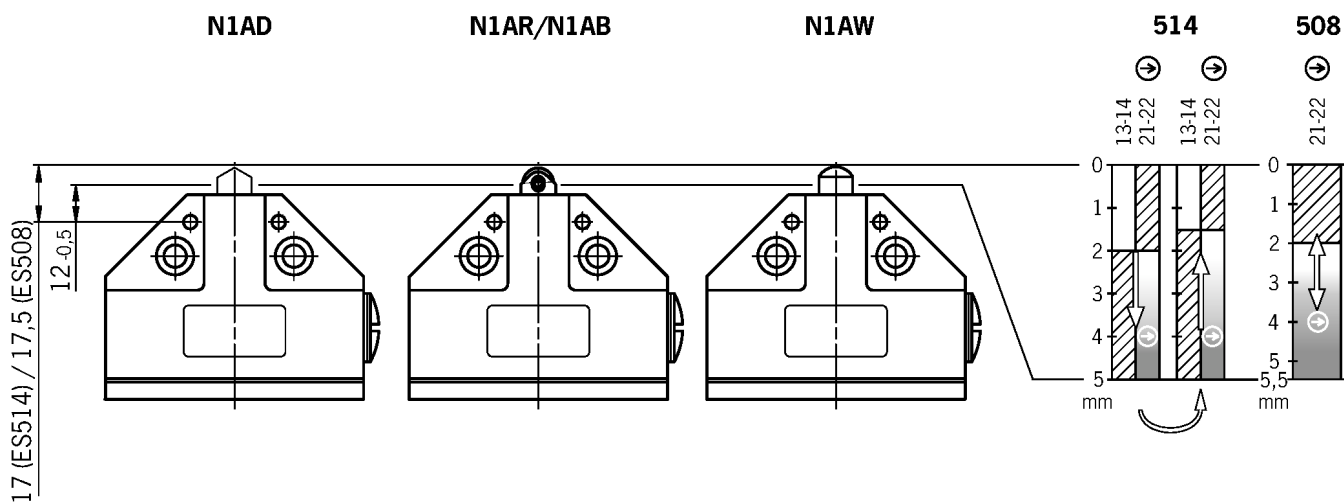

g_Kontakte_geschlossen_sw.eps

Contacts closed