


NX1-2131ASEM4-AS1 (Order no. 094362)

Safety switch NX ASi, plug connector M12

- ▶ Plug connector M12, 4-pin
- ▶ 2 pos. driven contact
- ▶ LED indicator



Approach direction

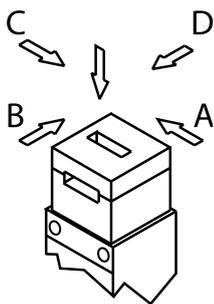

Horizontal and vertical
Can be adjusted in 90° steps

AS-Interface inputs

D0, D1 Positively driven contact 1

D2, D3 Positively driven contact 2

AS-Interface outputs

D1 LED red

D2 LED green

LED indicator

The Power LED indicates the operating voltage on the bus.


The Fault LED indicates if a fault has been detected on the AS-Interface bus.

The green and the red LEDs can be controlled as required by the control system via the bus using bits D1 and D2.

Accessories required


Actuator is not included.

Dimensional drawings

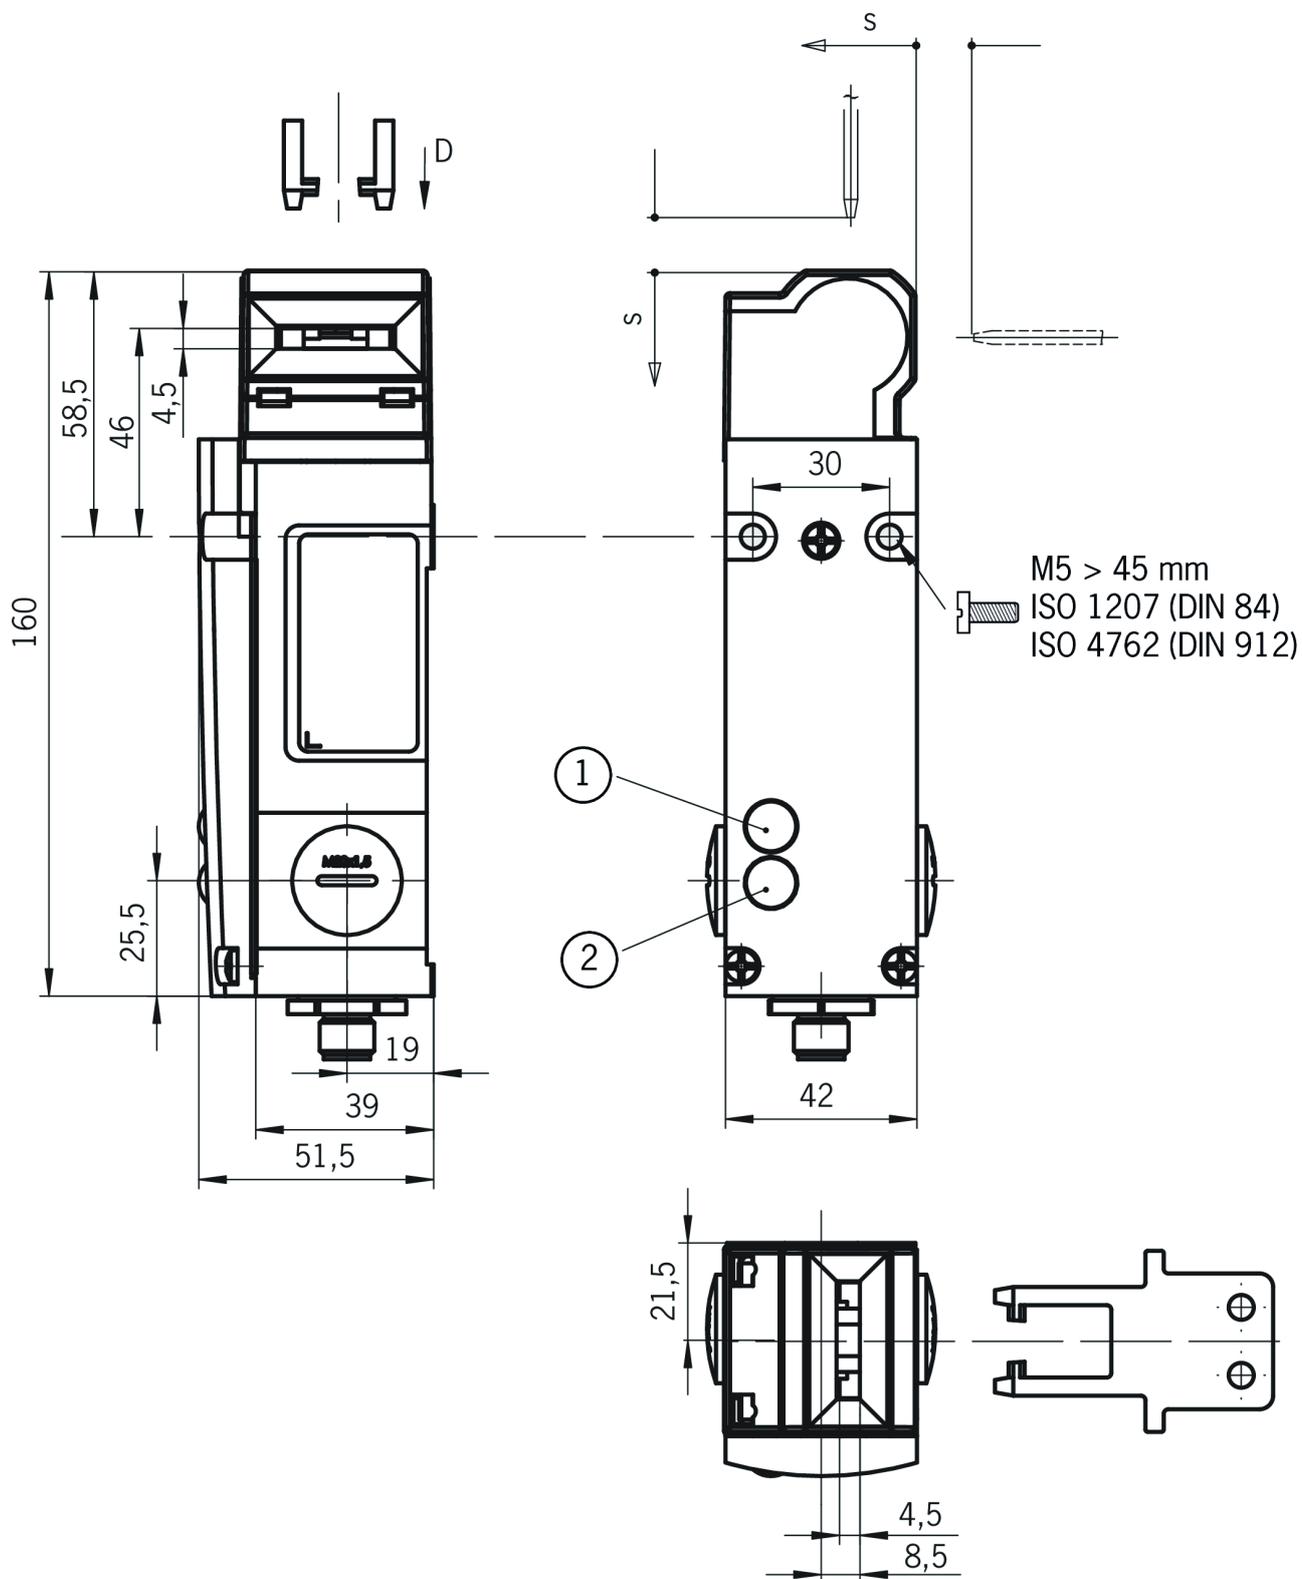

1 LED indicator red
2 LED indicator green

Connection examples

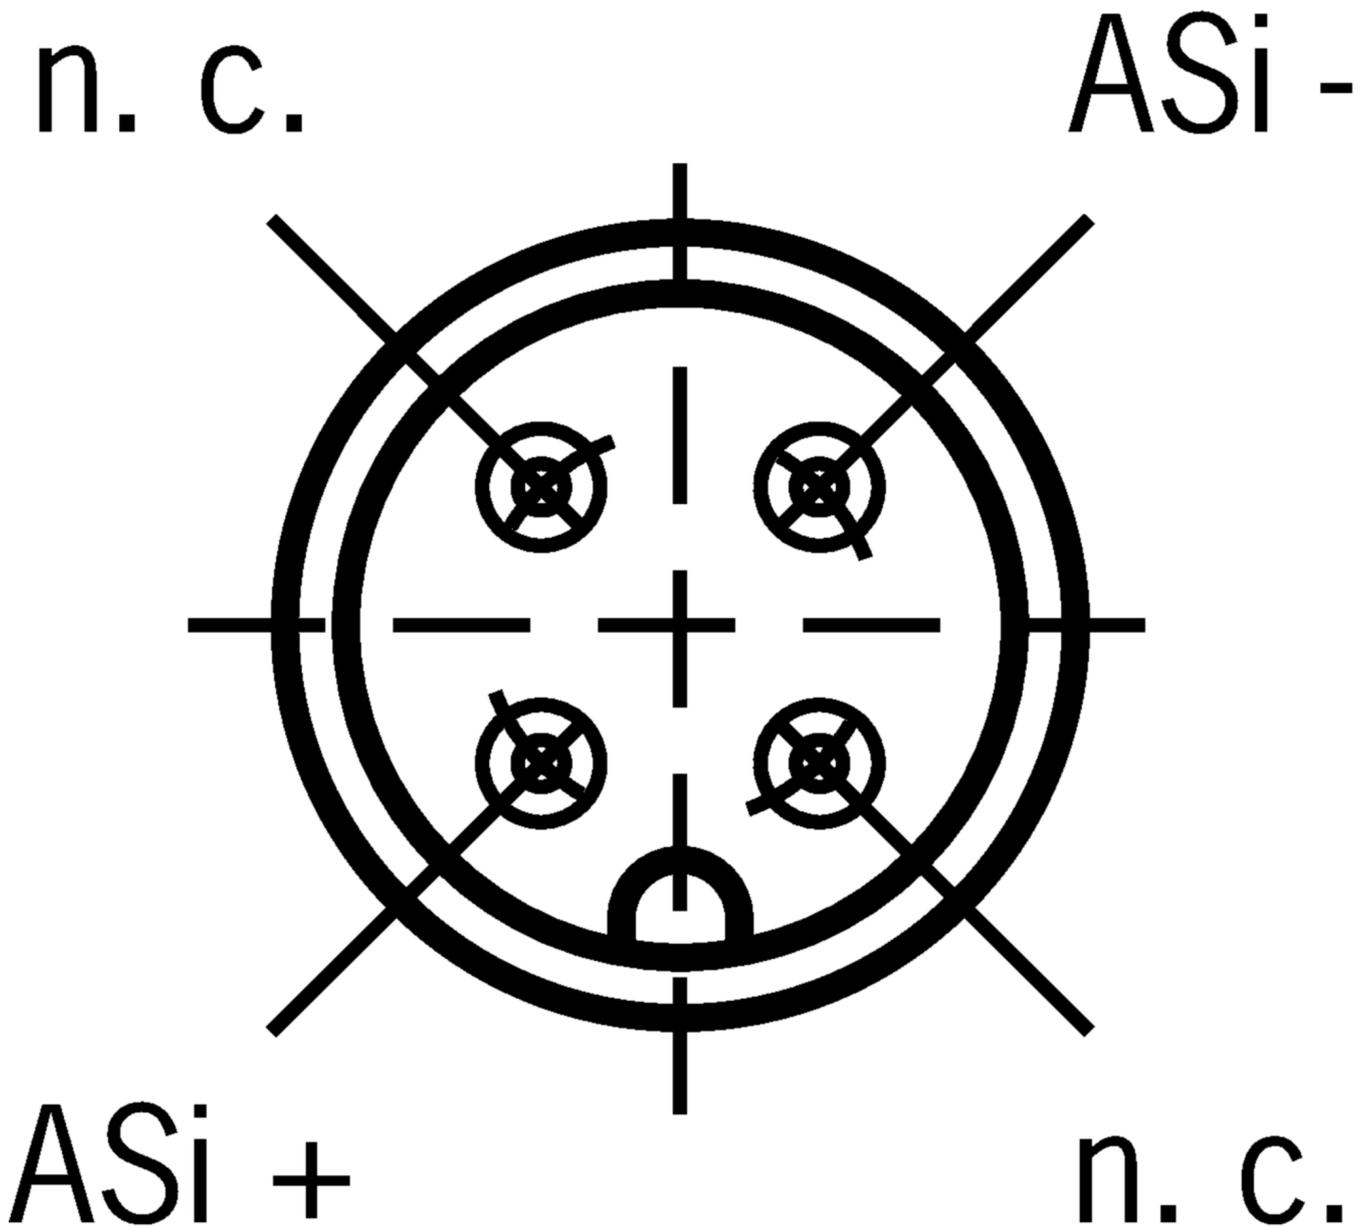

View of connection side