


MGB-L1H-ARA-R-117229 (Order no. 117229)

Locking set MGB-L1H-ARA... (guard locking by spring force) with 3 pushbuttons, emergency stop

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Emergency stop according to ISO 13850
- ▶ 3 pushbuttons (illuminated, gn, wh, bu)
- ▶ With cable entry
- ▶ Unicode

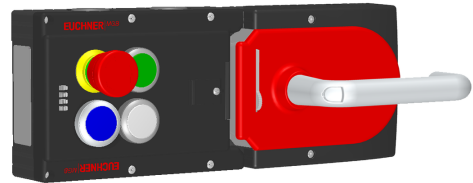

Guard locking type

MGB- L1... The locking arm is held in the locked position by spring force and is unlocked by solenoid force (closed-circuit current principle, mechanically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault

Emergency stop device

S1 2 positively driven contacts and 1 NO contact (e.g. monitoring contact), emergency stop with turn-to-reset, not illuminated

Pushbuttons

- S2 1 NO contact, green, illuminated
- S3 1 NO contact, white, illuminated
- S4 1 NO contact, blue, illuminated

Components



100464

MGB-H-AA1A1-R-100464

Handle module MGB-H-...

- ▶ Intelligent bolt tongue
- ▶ Lockout mechanism
- ▶ Door handle



117228

MGB-L1-ARA-AI9A1-M-117228

Locking module MGB-L1-ARA..., (guard locking by spring force) with 3 pushbuttons, emergency stop

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Emergency stop according to ISO 13850
- ▶ 3 pushbuttons (illuminated, gn, wh, bu)
- ▶ With cable entry
- ▶ Unicode