

## MGB-L2-ARA-AE5A1-S1-R-111923 (Order no. 111923)

### Locking module MGB-L2-ARA... (guard locking by solenoid force) with 2 indicators, machine stop, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Emergency stop according to ISO 13850
- ▶ 1 pushbutton (illuminated, ye)
- ▶ With plug connector RC18
- ▶ Unicode



### Guard locking type

MGB- L1... The locking arm is held in the locked position by solenoid force and is unlocked by spring force when the solenoid is switched off (open-circuit current principle, electrically locked).

### Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

### LED indicator

The LED indicator indicates all important system and status information.

### Monitoring outputs

- OT Bolt tongue inserted into the evaluation module
- OI Diagnostics; there is a fault


### Emergency stop device

S1 2 positively driven NC contacts and 1 NO contact, emergency stop with turn-to-reset, not illuminated

### Pushbuttons

S2 1 NO contact, yellow, illuminated

**Dimensional drawings**

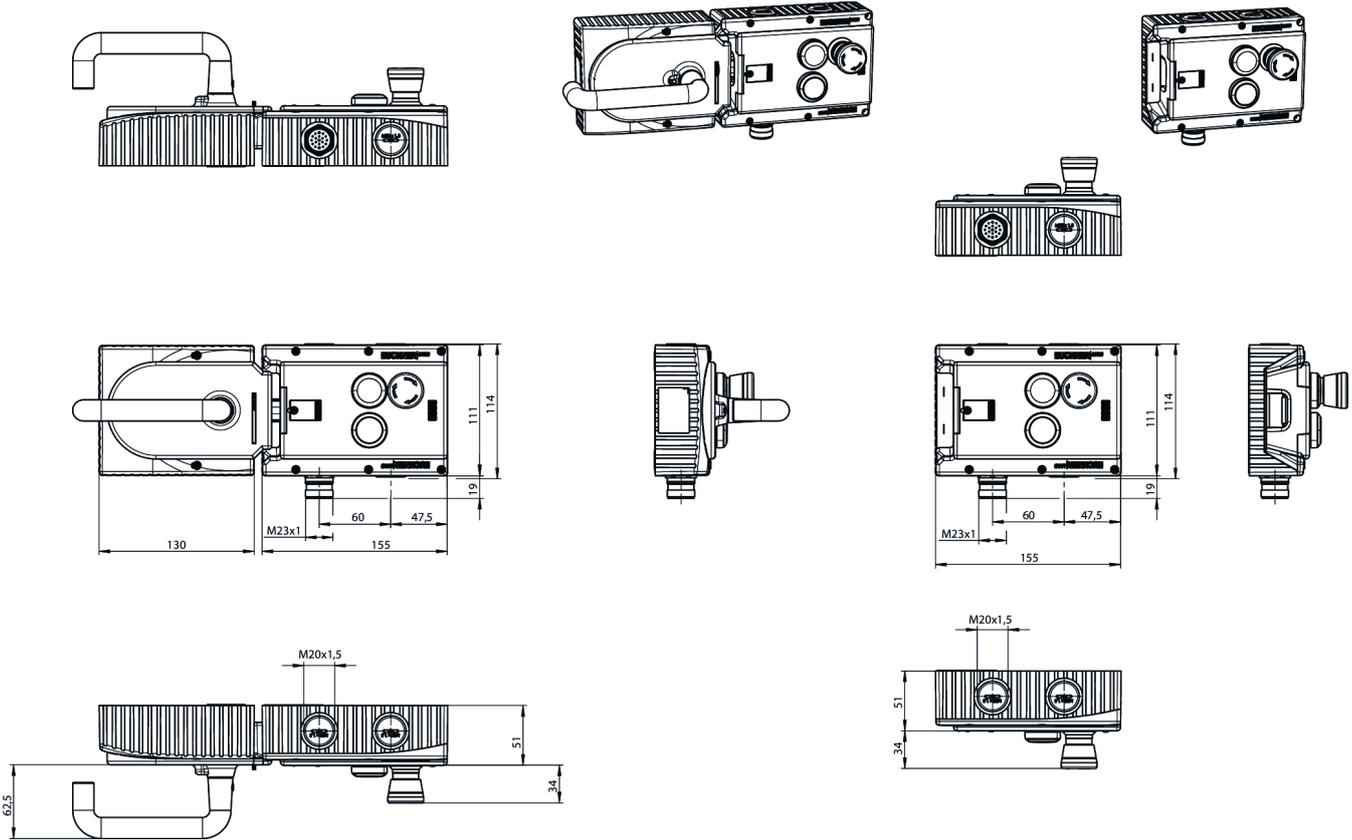

Dimensional drawings

