

Project : \_\_\_\_\_

Type : \_\_\_\_\_

Drawn by : \_\_\_\_\_

Catalogue No. : \_\_\_\_\_

Date : \_\_\_\_\_



VO-FG25W9-26



VO-FG25W9-26-30-D-M

## Specifications

| Model No.              |                       | □ VO-FG25W9-26     | □ VO-FG25W9-26-30-D-M |
|------------------------|-----------------------|--------------------|-----------------------|
| General                | CCT                   | □ 3000K □ 4000K    | 3000K                 |
|                        | Watts                 | 9W                 | 9W                    |
|                        | Lumen                 | 1000Lm             | 1000Lm                |
|                        | Base                  | E26                | E26                   |
|                        | Volts                 | 120V               | 120V                  |
|                        | CRI                   | >80                | >80                   |
|                        | Beam Angel            | 360°               | 360°                  |
|                        | Hours Rated           | 15,000Hrs          | 15,000Hrs             |
|                        | Product Size          | 4.57"(H) x3.15"(Φ) | 4.57"(H) x3.15"(Φ)    |
| Electrical             | IP Grade              | IP20               | IP20                  |
|                        | Power Factor          | >0.7               | >0.7                  |
|                        | Storage temperature   | -25°C ~ 40°C       | -25°C ~ 40°C          |
|                        | Operating Temperature | -25°C ~ 40°C       | -25°C ~ 40°C          |
| Physical               | Lens Material         | Glass              | Glass                 |
|                        | Bulb Head Color       | Clear              | Milky                 |
|                        | Weight (g)            | 45 (±5g)           | 45 (±5g)              |
| Additional Information | Additional Info       | Dimmable           | Dimmable              |
|                        | Warranty              | 3Years             | 3Years                |
| Compliance             | Certification         | cUL                | cUL                   |

## Features & Specifications

### Performance Data


- Available color temperature in 3000K/4000K
- 80+ CRI
- Electrical ratings : AC 120V 50-60Hz
- Estimated life: 15,000 hours
- Dimming Capable
- 2.5kV surge protection ( standard )
- -20°C~+40°C (the best in 25°C)

### Compliances


- cUL
- IP20

## Dimensions & Weights

| Model             | VO-FG25W9-26 | VO-FG25W9-26-30-D-M |
|-------------------|--------------|---------------------|
| Diameter in. (mm) | 3.15(80)     | 3.15(80)            |
| Height in. (mm)   | 4.57(116)    | 4.57(116)           |
| Net weight (g)    | 45 (±5g)     | 45 (±5g)            |

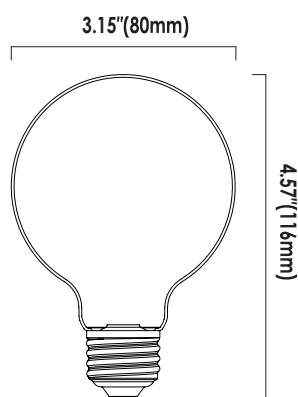


VO-FG25W9-26

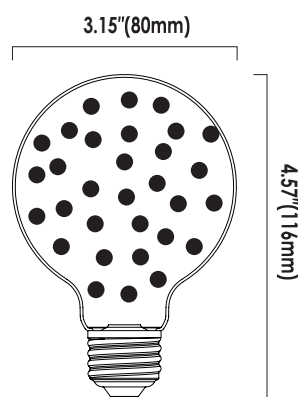

VO-FT25W5.5-120-30-D-M

### Product Details

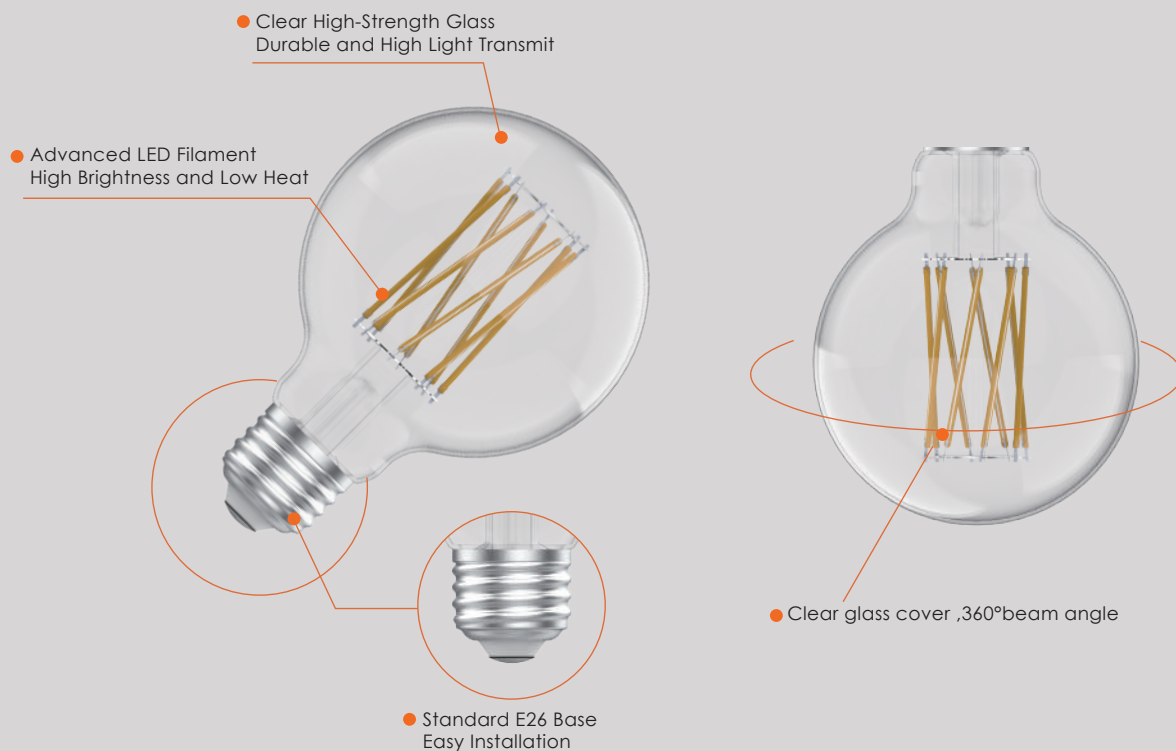

### Lumen Details

| Model No.:          | Watts (W) | 2700K             |                   | 3000K             |                   | 4000K             |                   | 5000K             |                   | 6000K             |                   |
|---------------------|-----------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|                     |           | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) |
| VO-FG25W9-26        | 9W        | —                 | —                 | 1121              | 148               | 1071              | 139               | —                 | —                 | —                 | —                 |
| VO-FG25W9-26-30-D-M | 9W        | —                 | —                 | 1088              | 131               | —                 | —                 | —                 | —                 | —                 | —                 |



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

