

**C-M23F19-19XDIFPU10,0-MA-092902 (Order no. 092902)****Connecting cable with plug connector M23 with option C1825, 10 m, angled**

- ▶ M23 plug connector, 18-pin + PE
- ▶ Angled plug connector
- ▶ Cable exit A (right)
- ▶ PUR cable
- ▶ Cable length 10 m
- ▶ With flying lead
- ▶ Cores color-coded



## Connector assignment

Plug connector (view of connection side)	Pin	Cross-section	Conductor coloring
	1	0.5 mm <sup>2</sup>	VT
	2	0.5 mm <sup>2</sup>	RD
	3	0.5 mm <sup>2</sup>	GY
	4	0.5 mm <sup>2</sup>	RDBU
	5	0.5 mm <sup>2</sup>	GN
	6	1.0 mm <sup>2</sup>	BU
	7	0.5 mm <sup>2</sup>	GYPK
	8	0.5 mm <sup>2</sup>	GNWH
	9	0.5 mm <sup>2</sup>	YEWB
	10	0.5 mm <sup>2</sup>	GYWB
	11	0.5 mm <sup>2</sup>	BK
	12	1.0 mm <sup>2</sup>	GNYE
	13	0.5 mm <sup>2</sup>	PK
	14	0.5 mm <sup>2</sup>	BNGY
	15	0.5 mm <sup>2</sup>	BNYE
	16	0.5 mm <sup>2</sup>	BNGN
	17	0.5 mm <sup>2</sup>	WH
	18	0.5 mm <sup>2</sup>	YE
	19	1.0 mm <sup>2</sup>	BN

## Dimensional drawings

CEM-C40



CTP / CTA



CET



Bei der gezeigten Einbaulage des Geräts gilt:


Leitungsabgang C  
(links)

Leitungsabgang A  
(rechts)



- 1 The following applies to the device installation position shown: cable outlet C (left)
- 2 The following applies to the device installation position shown: cable outlet A (right)

## Dimensional drawings

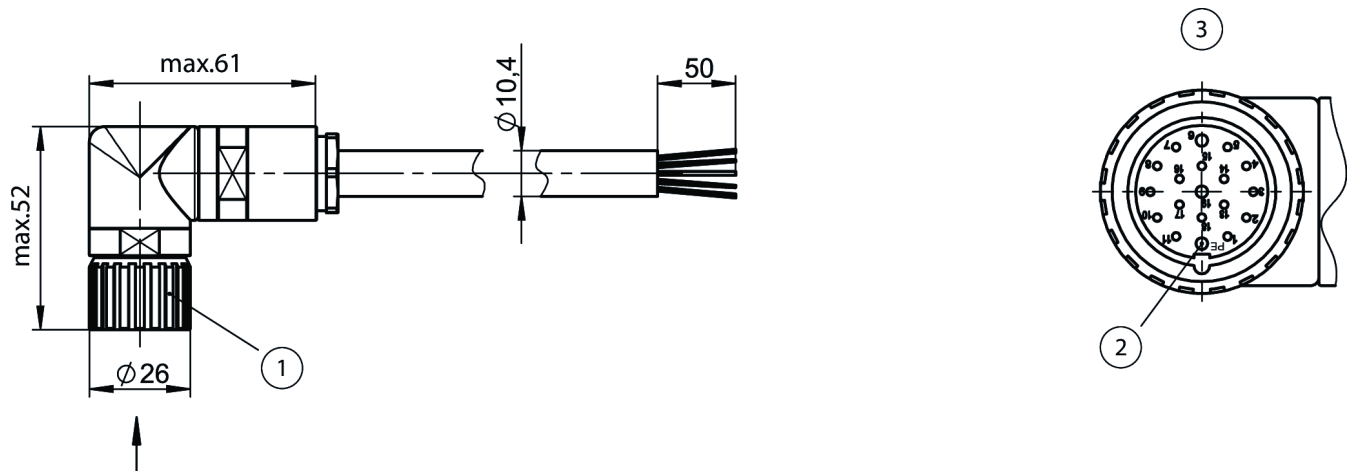

- 1 Female plug with union nut M23, 19-pin, with shield spring
- 2 PIN 12 (PE with shield spring)
- 3 Terminal assignment as seen from the connection side cable outlet A