

RIEGEL TX-C (Order no. 082991)

Bolt for safety switches series TX and NX

- ▶ Bolt for safety switches series TX and NX
- ▶ Steel bolt
- ▶ For doors hinged on the left
- ▶ Suitable for a door gap of approx. 15 mm



Scope of delivery

- ▶ Bolt parts
- ▶ Actuator
- ▶ Switch bracket

To be ordered separately:

- ▶ Safety switch





Door types and door hinges

Suitable for hinged and sliding doors. Suitable for doors hinged on the left. With door stop, door cannot be opened inwards.

Integrated lockout bar

With the aid of the integrated lockout bar, the bolt can be secured in the open position, e.g. using padlocks. It is possible to prevent people from being locked in the danger area unintentionally.

Dimensional drawings

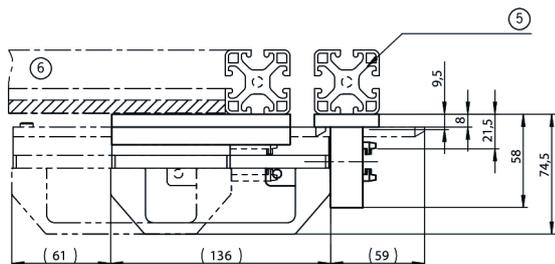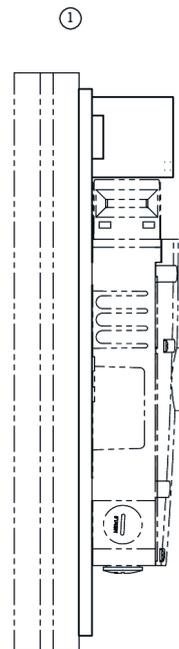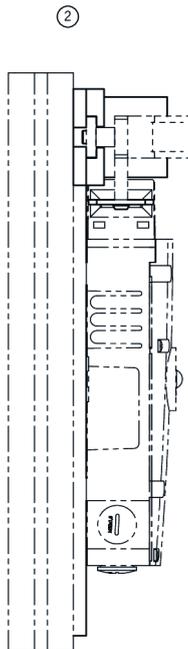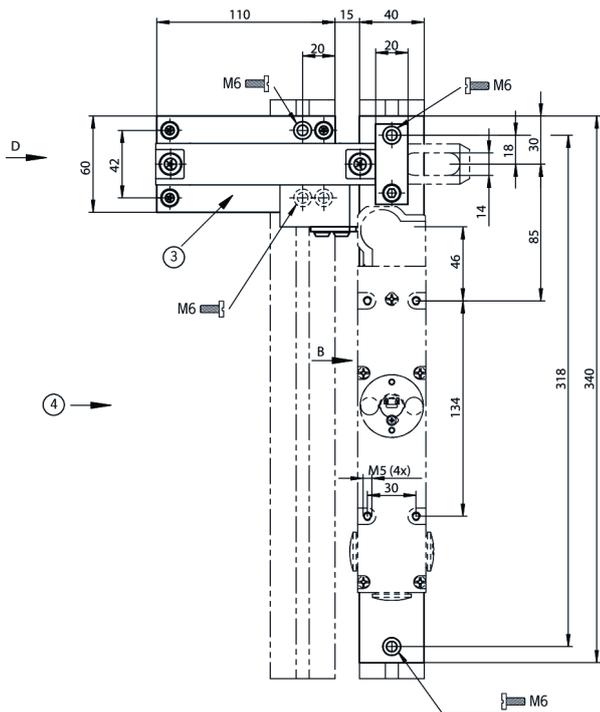

1 View B

2 View D

3 Attention! Bolt is not allowed to be used in conjunction with an escape release!

4 Safety switch TX approach direction C

5 Safety guard frame (40x40)

6 Door hinged on the left

Technical data

Mechanical values and environment

Approach direction	C
Number of safety switches that can be mounted	1
Escape release	None
Storage temperature	-25 ... 70 °C
Material	
Switch bracket	Steel powder-coated
Handle	Plastic
Guide strips	Plastic
Base plate	Galvanized steel

Miscellaneous

Detent mechanism	None
------------------	------