


BETAETIGER-S-WT-LN-C2115 (Order no. 105809)

Actuator S, bent, for safety switch SGA/SGP/STA/STP/STM for insertion funnel

- ▶ Two stainless-steel safety screws per actuator
- ▶ Actuator with rubber bush
- ▶ Minimum door radius 300 mm

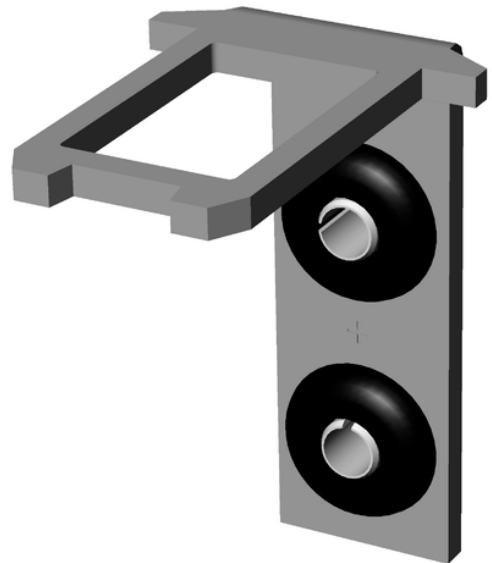

Notice

S-...-SN actuators must not be used in conjunction with insertion funnels. S-...-LN actuators must be used for insertion funnels.

Bent actuator

Suitable for a maximum tensile force of 1000 N.

Screws made of stainless steel

The safety screws included can be inserted with a normal tool, but cannot be removed again.

Technical data

Mechanical values and environment

Storage temperature	-25 ... 70 °C	
Overtravel	max. 5 mm	
Door radius	min. 300 mm	
Material		
	Actuator	Stainless steel
	Rubber bush	NBR
	Screw	Stainless steel
Locking force $F_{\max}$	max. 1000 N reduced locking force by actuator	

Miscellaneous

C number		
	C2115	Installation dimensions as for TP actuator
Usability of insertion funnel	Yes	