

RIEGEL TZ-C-NIRO (Order no. 079799)

Bolts for safety switches series TZ

- ▶ Stainless steel bolt
- ▶ For doors hinged on the left
- ▶ Suitable for a door gap of approx. 15 mm



Scope of delivery

- ▶ Bolt parts
- ▶ Actuator
- ▶ Switch bracket

To be ordered separately:

- ▶ Safety switch


Door types and door hinges

Suitable for doors hinged on the left. Without door stop, door can be opened inwards and outwards.

Integrated lockout bar

With the aid of the integrated lockout bar, the bolt can be secured in the open position, e.g. using padlocks. It is possible to prevent people from being locked in the danger area unintentionally.

Dimensional drawings

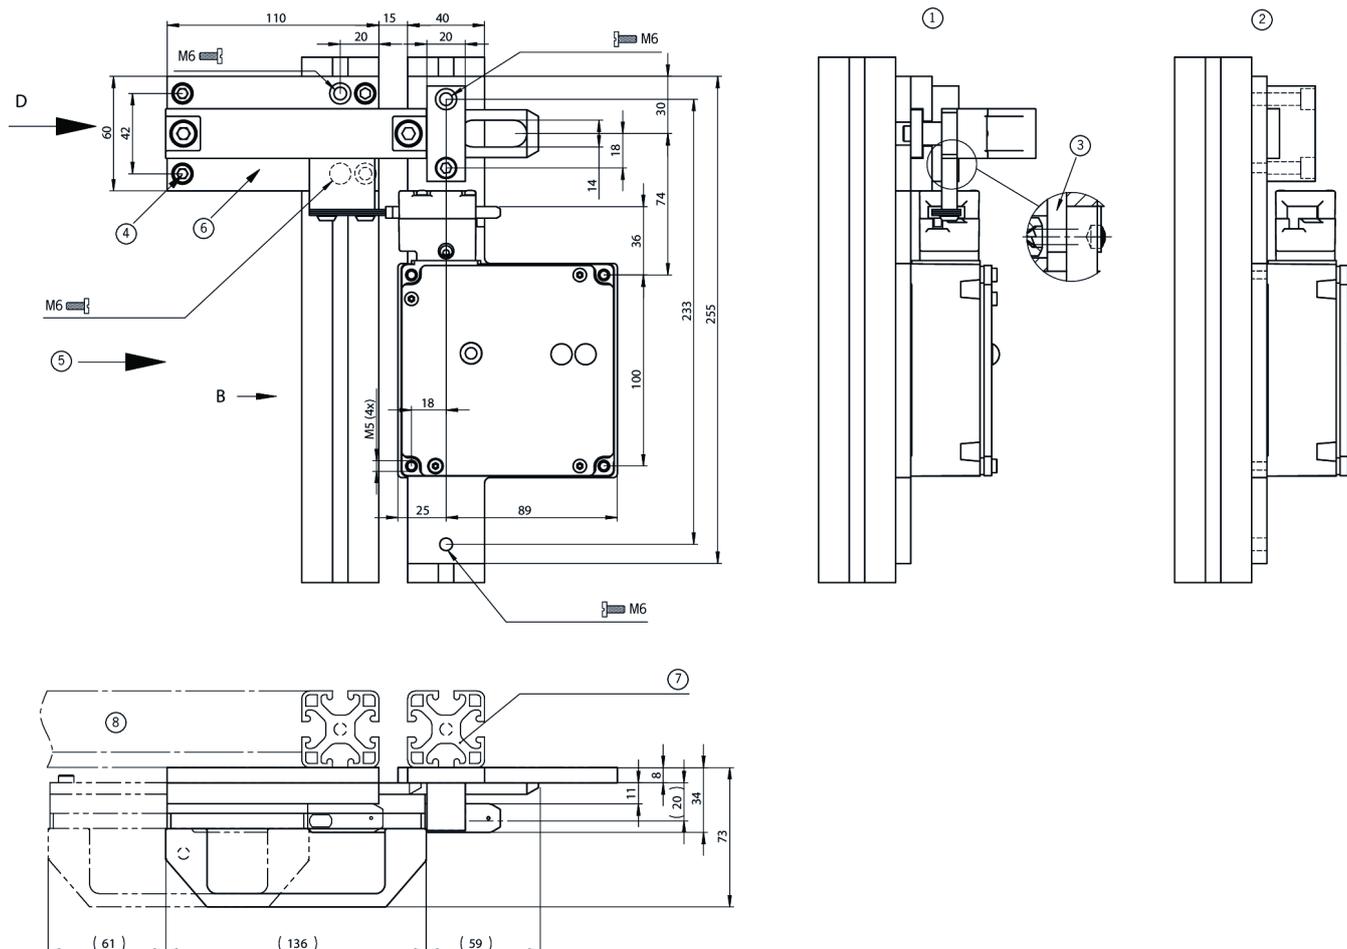

1 View D

2 View B

3 Metal sleeve

4 Stop screw locked

5 Safety switch TZ approach direction C

6 Attention! Bolt is not allowed to be used in conjunction with an escape release!

7 Safety guard frame (40x40)

8 Door hinged on the left

Technical data

Mechanical values and environment

Approach direction	C
Number of safety switches that can be mounted	1
Escape release	None
Storage temperature	-25 ... 70 °C
Material	
Switch bracket	stainless steel
Base plate	stainless steel
Handle	Plastic
Guide strips	Plastic

Miscellaneous

Detent mechanism	None
------------------	------