


CMS-MH-BB (Order no. 113213)

Actuator CMS with Hall sensors – design B

- ▶ Cube-shaped version, 36 x 26 mm

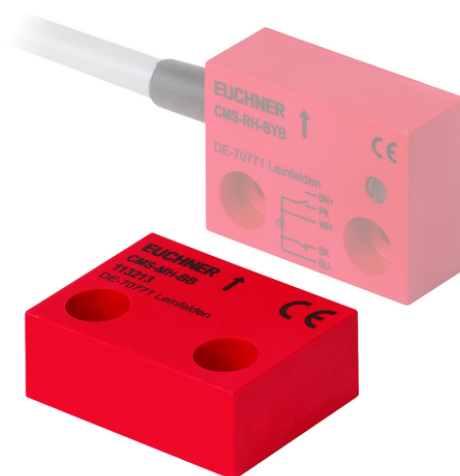

Technical data

Mechanical values and environment

Design	B
Storage temperature	-25 ... 70 °C
Degree of protection	IP67
Ambient temperature	-20 ... 60 °C
Material	
	Housing PPS
Method of operation	Hall sensor

Miscellaneous

in compliance with	EN ISO 13849-1:2015; EN 50178:1997; EN 60204-1:2006/ A1:2009; EN ISO 14119:2013; EN 61000-6-2:2005; EN 61000-6-3:2007/A1:2011; EN 60947-5-3:2013
--------------------	--