

- Power: 5.5W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 600 Lm
- CCT: 3000K
- Beam Angle: 360°
- Base: E12 (Anti-Shock)
- Dimension: 3-7/8"(H) * 1-3/8"(Ø)



Frosted



Candle Filament
VO-FCAW5.5-120-F



Votatec
Innovation & Quality

www.votatec.ca

- Power: 5.5W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 600 Lm
- CCT: 3000K/4000K
- Beam Angle: 360°
- Base: E12 (Anti-Shock)
- Dimension: 3-7/8"(H) * 1-3/8"(Ø)



**Cut Glass
Candle Filament**
VO-FCAW5.5-12-CU



- Power: 5W
- Input Voltage: 120V
- Power Factor: 0.7
- Brightness: 500 Lm
- CCT: 3000K/4000K
- Beam Angle: 360°
- Base: E26
- Dimension: 5"(H) * 1-1/4"(Ø)



T10 Filament
VO-FT10W5-26

Votatec
Innovation & Quality

www.votatec.ca

- Power: 4W
- Input Voltage: 120V
- Power Factor: 0.7
- Brightness: 400 Lm
- CCT: 3000K/4000K
- Beam Angle: 360°
- Base: E12 (Anti-Shock)
- Dimension: 3-1/2"(H) * 1"(Ø)




T25 Filament
VO-FT25W4-12

- Power: 6W
- Input Voltage: 120V
- Power Factor: 0.7
- Brightness: 600 Lm
- CCT: 3000K/4000K
- Beam Angle: 360°
- Base: E26
- Dimension: 7-1/2"(H) * 1-1/4"(Ø)



T30 Filament
VO-FT30W6-26

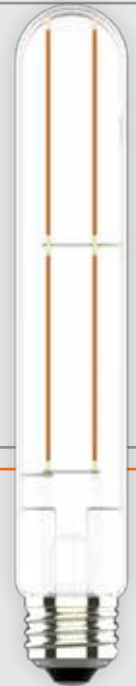

Votatec
Innovation & Quality

www.votatec.ca

- Power: 9W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 1000 Lm
- CCT: 3000K/4000K
- Beam Angle: 360°
- Base: E26
- Dimension: 8"(H) * 1-6/8"(Ø)



T40 Filament
VO-FT40W9-26

