MGB-L2HE-ARA-L-121072 (Order no. 121072)

Locking set MGB-L2HE-ARA... (guard locking by solenoid force) with 2 pushbuttons

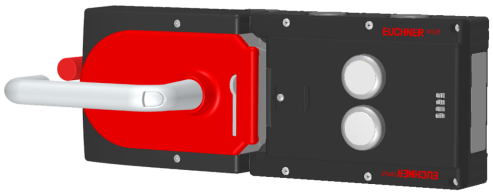

- Guard locking with guard lock monitoring
- Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- 2 pushbuttons (illuminated)
- With lens set, 6 pcs.
- With cable entry
- With escape release
- Unicode

Guard locking type

MGB-L2...	The locking arm is held in the locked position by solenoid force and is unlocked by spring force when the solenoid is switched off (open-circuit current principle, electrically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

OD	ON when the door is closed
OT	Bolt tongue inserted into the evaluation module
OL	Guard locking solenoid in locked position
OI	Diagnostics; there is a fault

Pushbuttons

S2	1 NO contact, illuminated
S3	1 NO contact, illuminated

Lens set

The color of the pushbuttons can be selected using the color cover set included (5 colors). Item no.: 120344 (see Accessories)

Escape release

The escape release enables people accidentally shut in to open the guard locked door from the danger zone.