


MGB-L1HB-EIA-L-128330 (Order no. 128330)

Locking set MGB-L1...-EI (guard locking by spring force) with 3 pushbuttons

- ▶ Guard locking with guard lock monitoring
- ▶ 3 illuminated pushbuttons
- ▶ Connection via M12 plug
- ▶ Pre-assembled on mounting plates
- ▶ Unicode

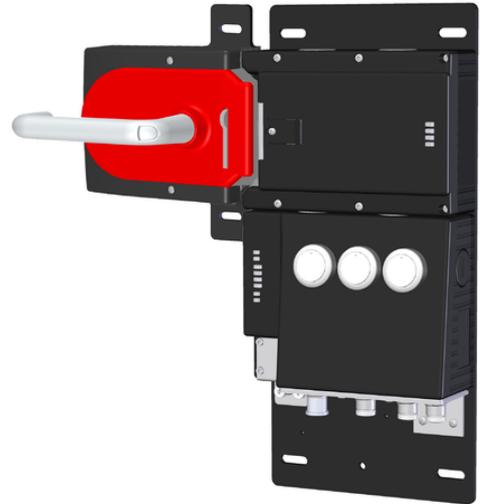

Ethernet/IP connection

M12 plug (a-coded) 4-pin according to IEC 61076-2-101


Integrated switch

Point-to-point topology network structure due to integrated switch.

Flexible use as interlocking or guard locking



By means of the corresponding evaluation of the safe device data by the control system, use can be as either interlocking or guard locking (with or without monitoring).

Dimensional drawings

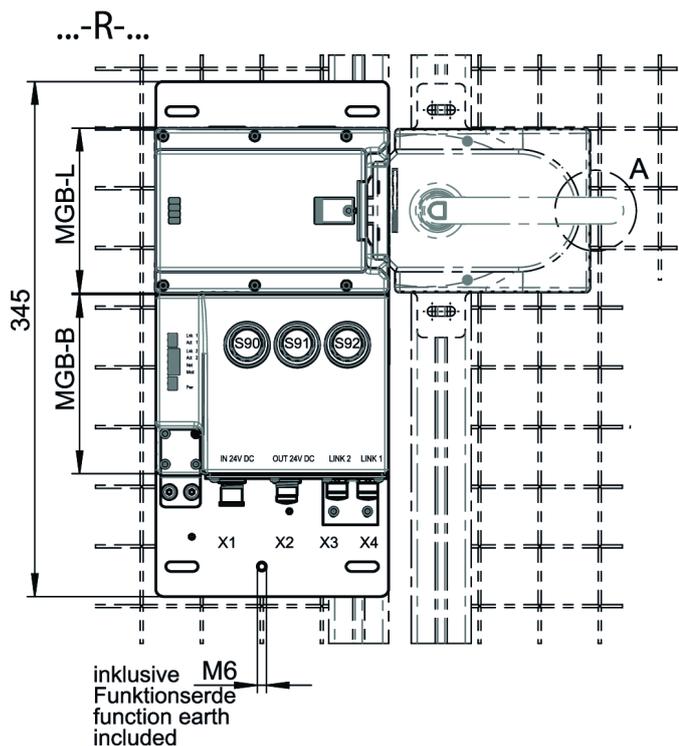

- X1 M12 A-coded (Stecker/ male) 4-polig
- X2 M12 A-coded (Buchse/ female) 4-polig
- X3 / X4 M12 D-coded (Buchse/ female) 4-polig

Detail A
 Sperrverriegelung im
 ausgefahrenen Zustand
 Automatic lockoutbar in "open" position.

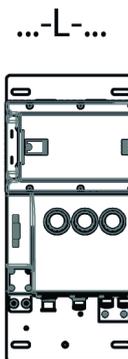

Connection examples

