

NM11AG–MC2069 (Order no. 095361)

Safety switch NM.AG, hinged actuator as hollow shaft, short housing, cable entry M16 x 1.5

- ▶ Hinged actuator as hollow shaft, inner diameter 10.2 mm
- ▶ short housing
- ▶ Cable entry M16 x 1.5
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts




Head alignment

Actuating head can be adjusted in 90° steps.

Switching element

ES11 Slow-action switching contact 1 positively driven contact \rightarrow + 1 NO contact

Dimensional drawings

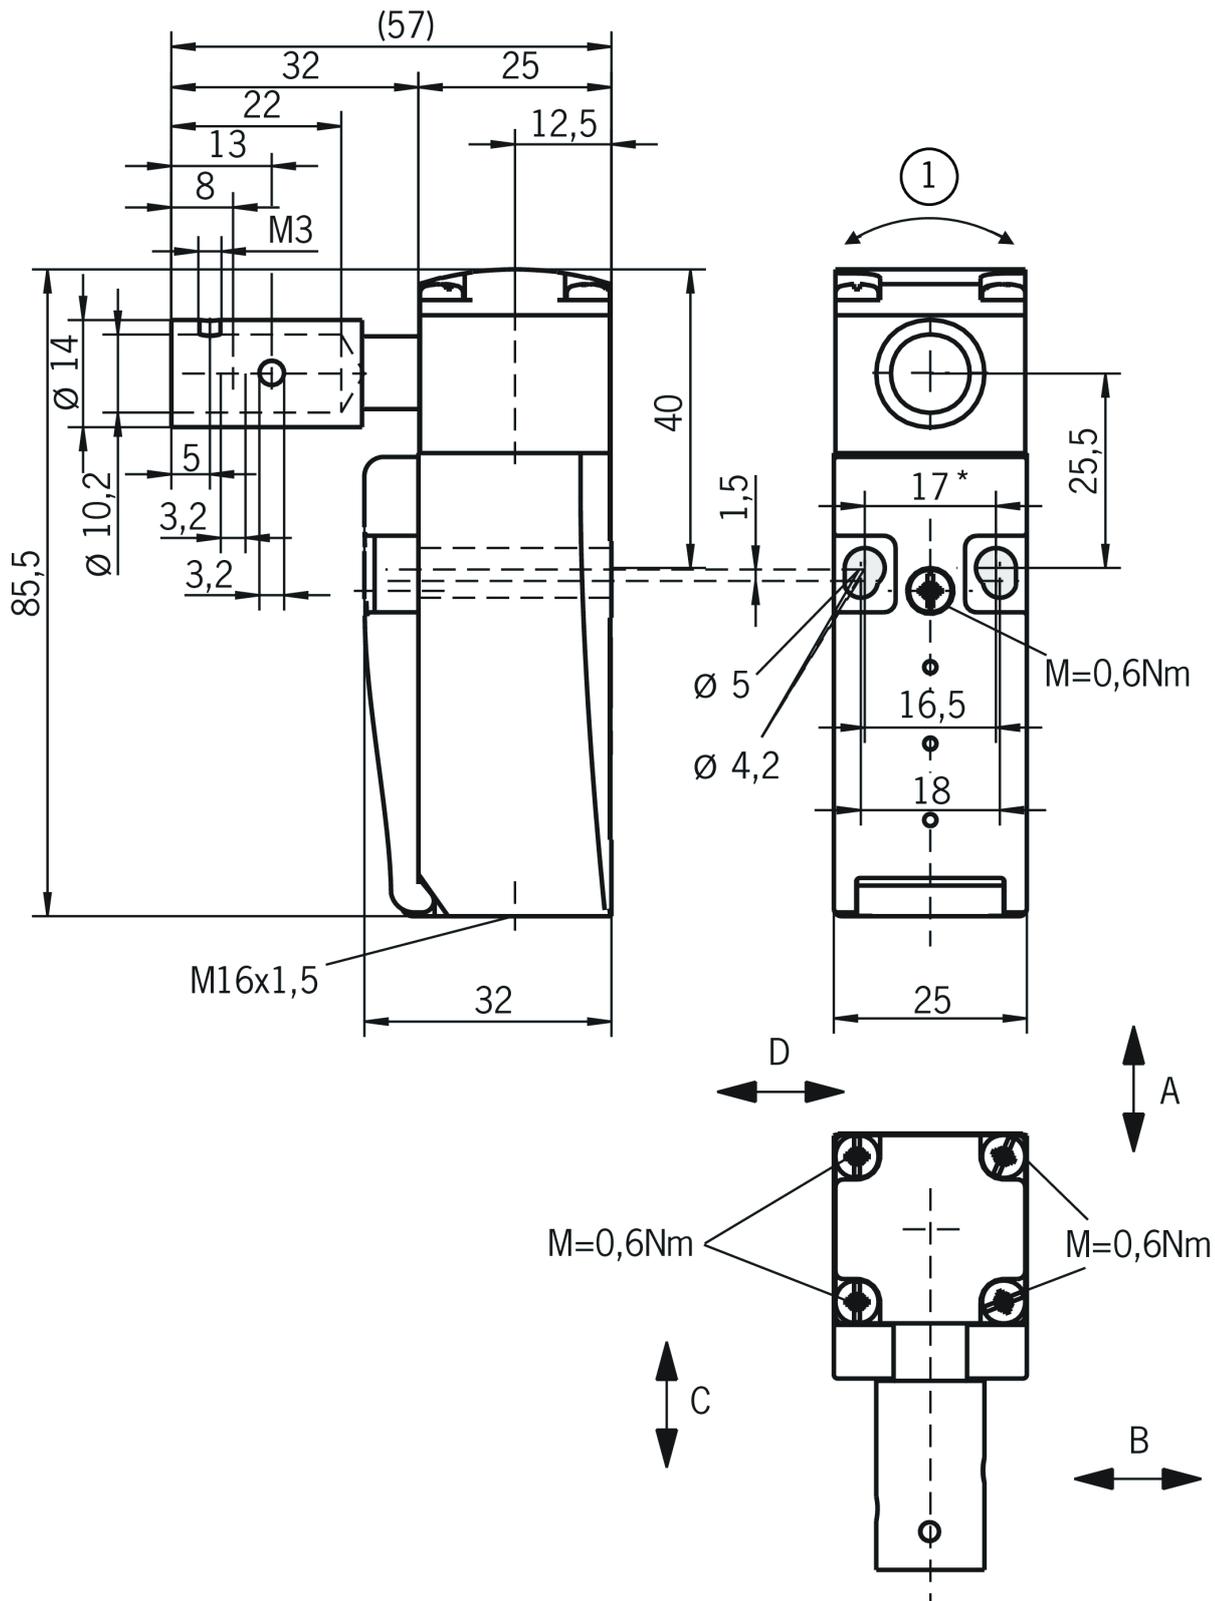

* fixed positioning for safety-related applications (M5)

1 Actuating direction

Connection examples

