

NZ1HB-511L060GE-M (Order no. 086525)

Safety switch NZ.HB, lever arm with plastic roller, cable entry M20 x 1.5

- ▶ Lever arm, plastic roller \varnothing 18 mm
- ▶ Version A according to EN 50041
- ▶ Cable entry M20 x 1.5
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts
- ▶ LED indicator: AC/DC 12-60 V yellow



Approach direction



Horizontal

Can be adjusted in 90° steps

Switching direction adjustable

Right, left or both sides



LED indicator

The switch has one freely assignable LED indicator.

Switching element

511 Snap-action switching contact, 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact

Dimensional drawings

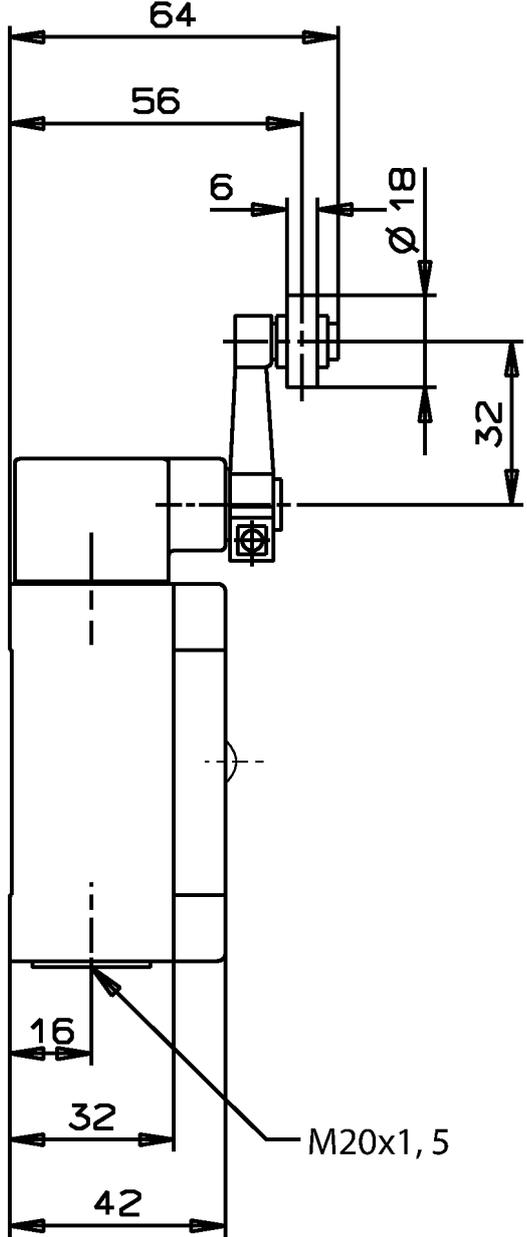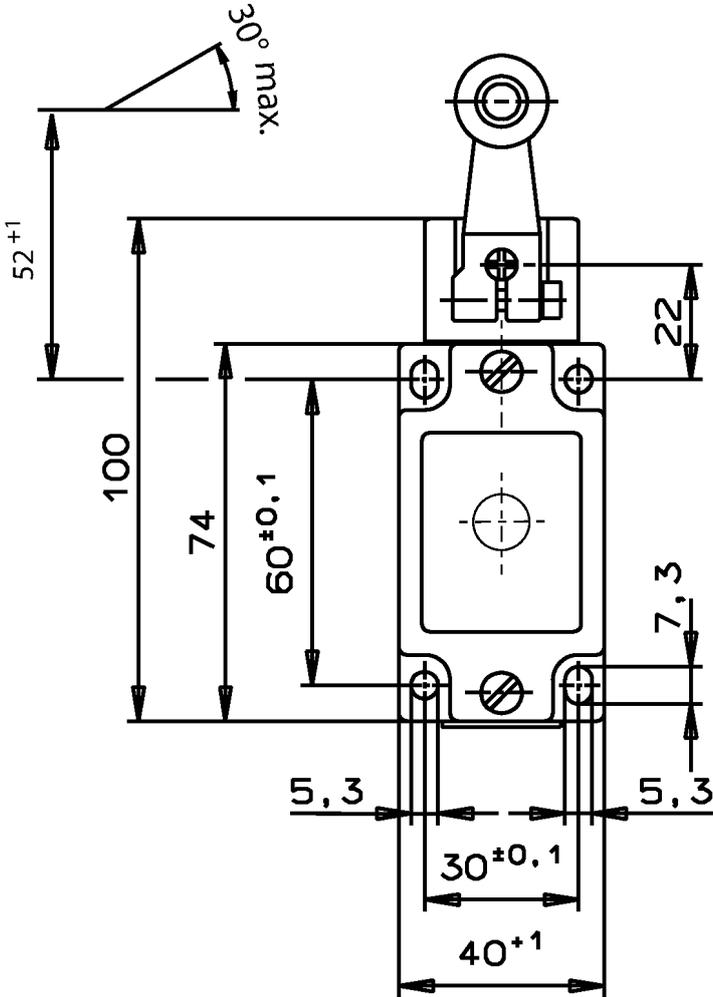

Connection examples

