

NM02AK–MC2069 (Order no. 095362)

Safety switch NM.AK, hinged actuator as hollow shaft, short housing, cable entry M16 x 1.5

- ▶ Hinged actuator as hollow shaft, inner diameter 8.2 mm
- ▶ short housing
- ▶ Cable entry M16 x 1.5
- ▶ 2 pos. driven contact




Head alignment

Actuating head can be adjusted in 90° steps.

Switching element

ES02 Slow-action switching contact 2 positively driven contacts →

Dimensional drawings

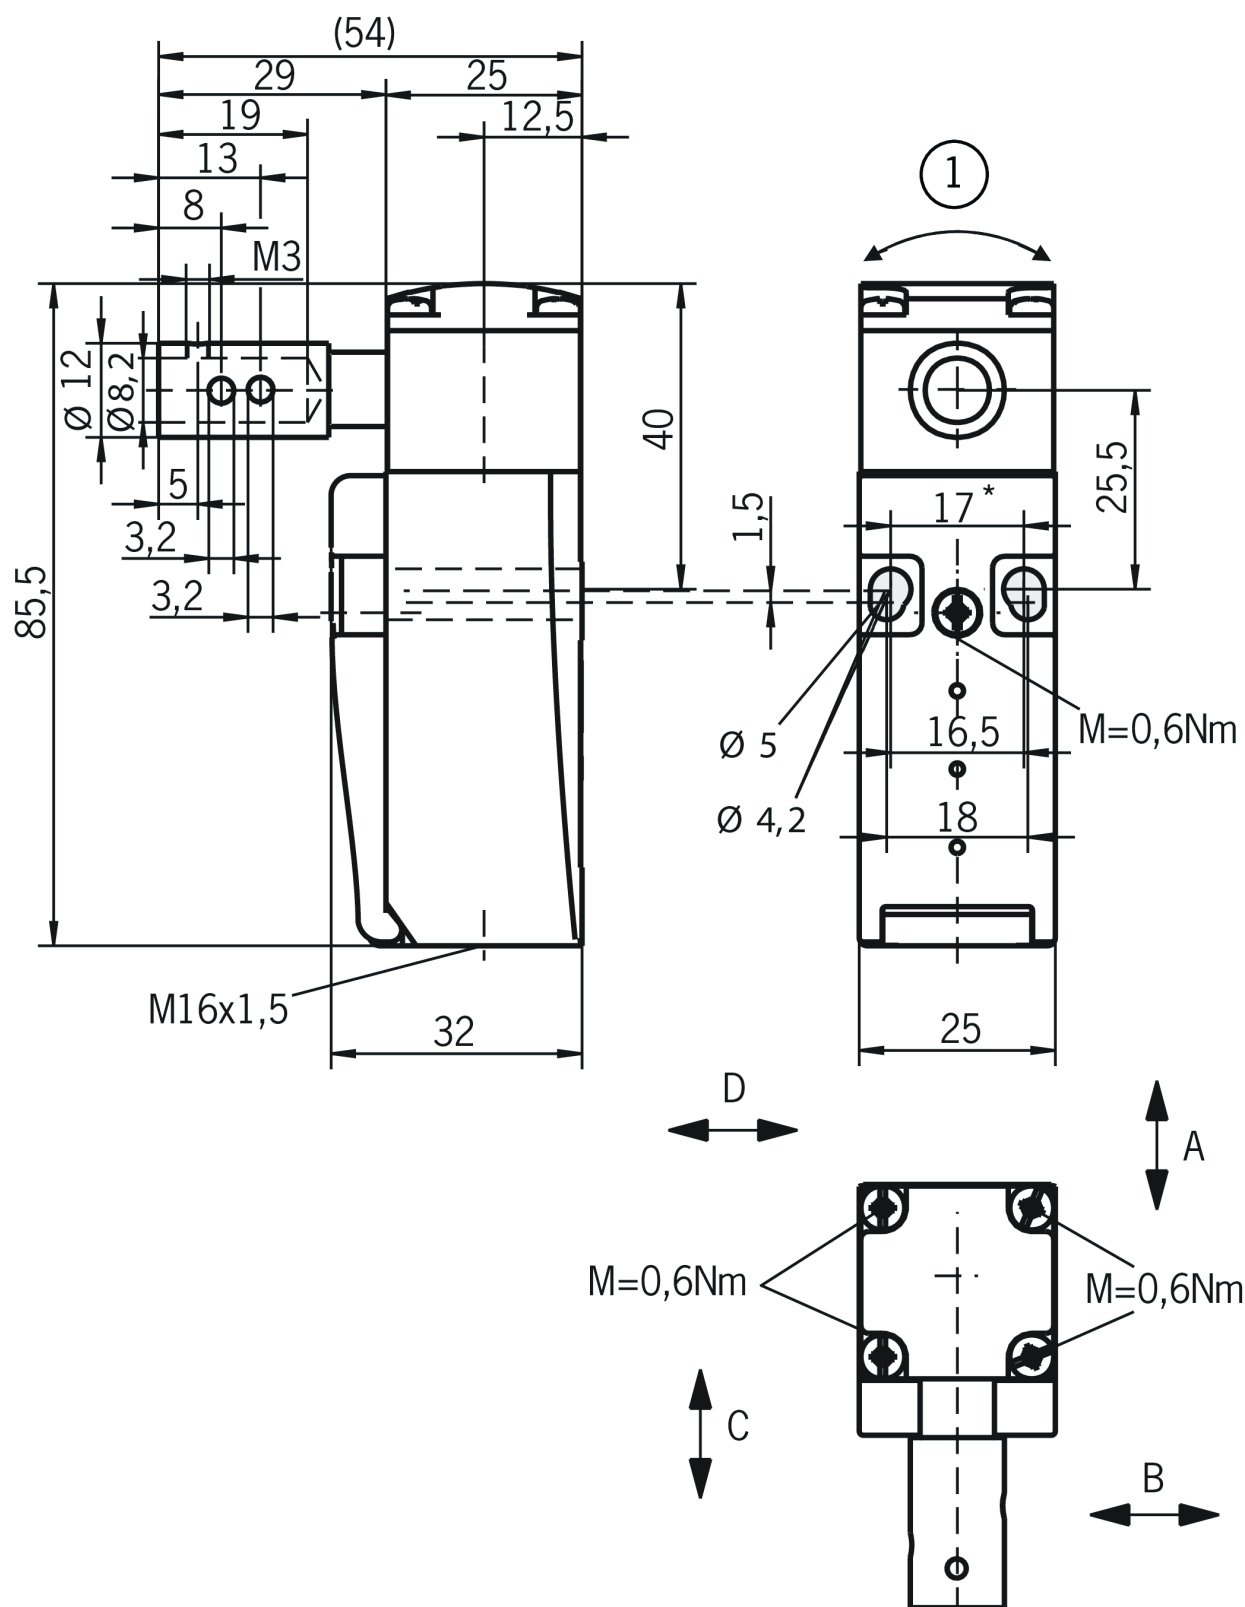

*fixed positioning for safety-related applications (M5)

1 Actuating direction

Connection examples

