


BETAETIGER-M-GS (Order no. 074128)

Actuator for safety switch NM.VZ

- ▶ Actuator made of stainless steel
- ▶ Two stainless-steel safety screws per actuator
- ▶ Compact design

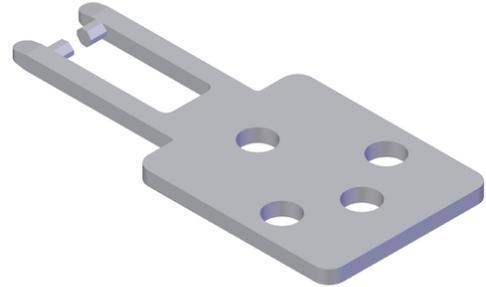


Straight actuator

The straight actuator is used on sliding doors or hinged doors with door radii greater than 150 mm. Safety screws prevent unscrewing of the actuators.



Screws made of stainless steel

The safety screws included can be inserted with a normal tool, but cannot be removed again.

Dimensional drawings

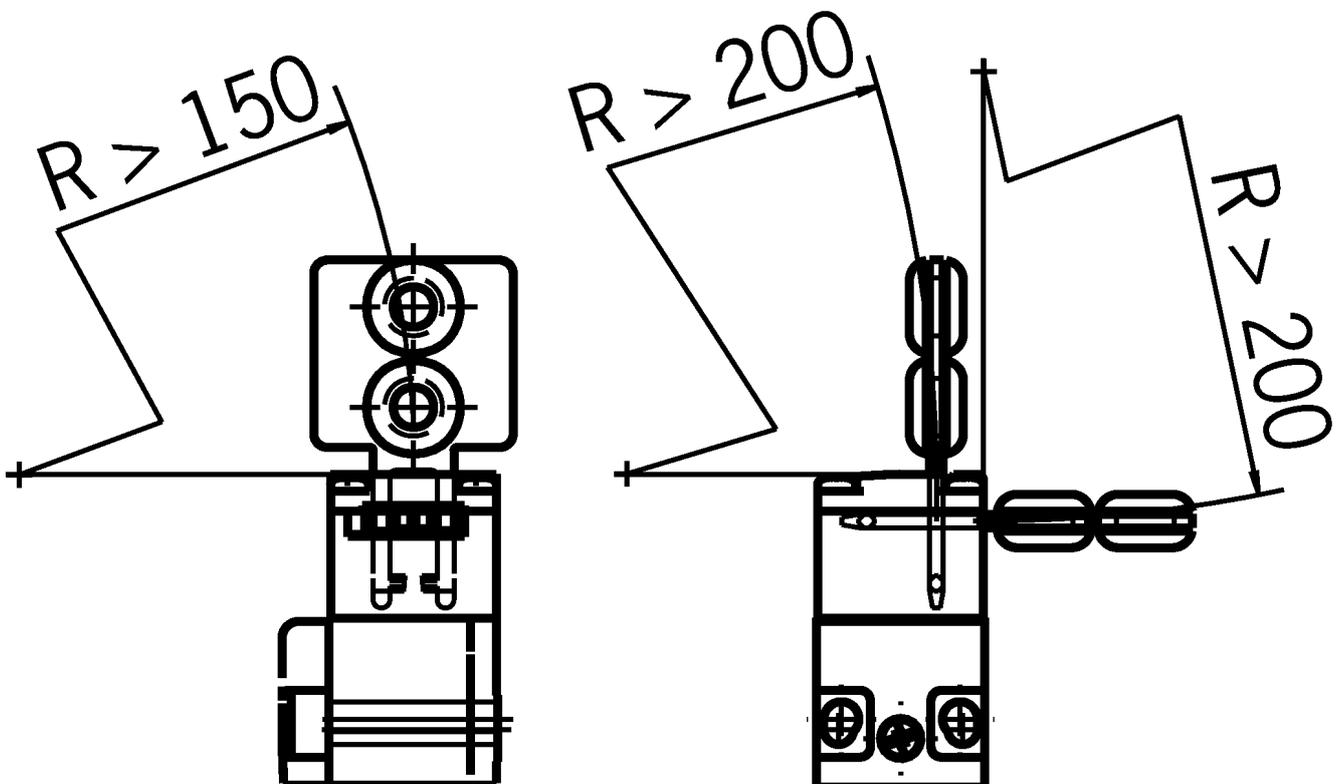

Dimensional drawings

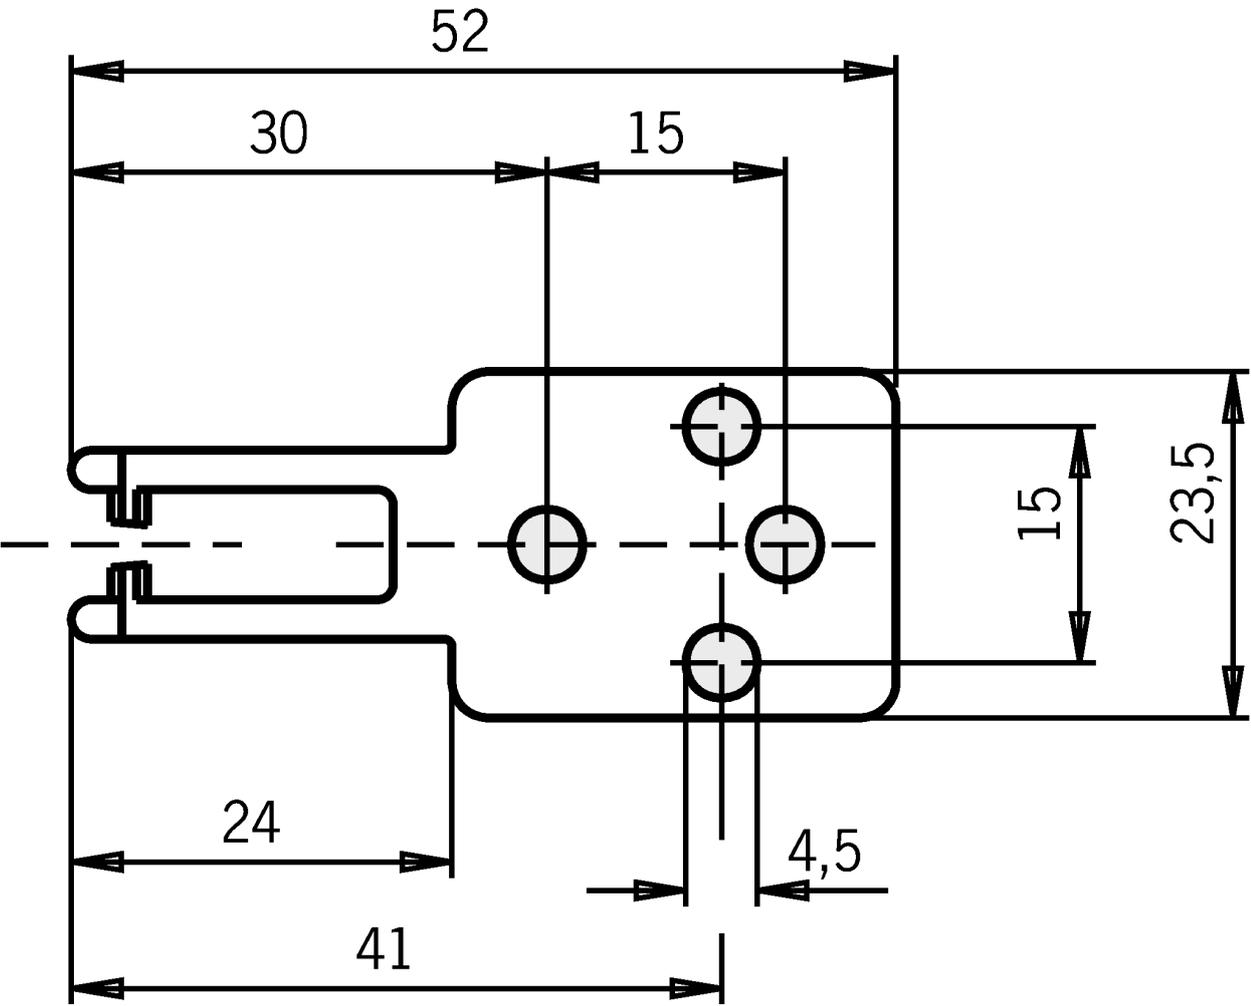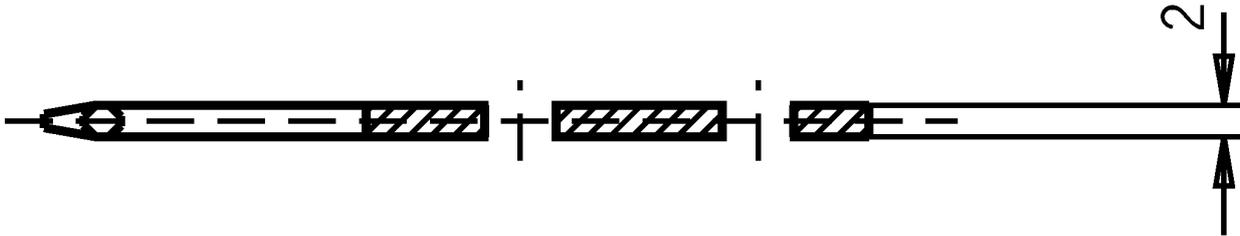

Technical data

Mechanical values and environment

Storage temperature	-25 ... 70 °C
Overtravel	max. 4 mm
Door radius	min. 150 mm
Material	
Actuator	Stainless steel
Screw	Stainless steel

Miscellaneous

Usability of insertion funnel	Yes
-------------------------------	-----