


Project : \_\_\_\_\_  
 Type : \_\_\_\_\_  
 Drawn by : \_\_\_\_\_  
 Catalogue No. : \_\_\_\_\_  
 Date : \_\_\_\_\_

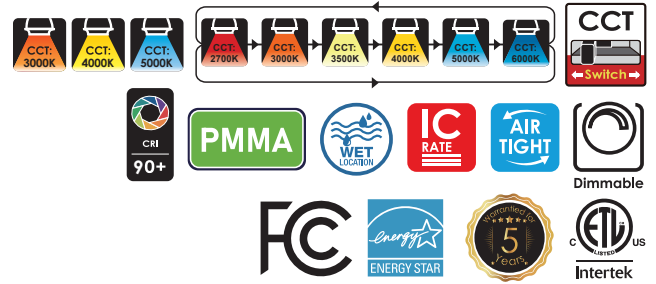

## Specifications


Model No.	<input type="checkbox"/> VO-RP4W9-120-D-6WAY/WH	<input type="checkbox"/> VO-RP4W9-120-D-6WAY/BK	<input type="checkbox"/> VO-RP4W9-120-30-D	<input type="checkbox"/> VO-RP4W9-120-40-D	<input type="checkbox"/> VO-RP4W9-120-50-D	
<b>General</b>	Watts	9W	9W	9W	9W	9W
	HID Equivalent	50W	50W	50W	50W	50W
	Lumen	750Lm	750Lm	750Lm	750Lm	750Lm
	CCT	27K/30K/35K/40K/50K/60K	27K/30K/35K/40K/50K/60K	3000K	4000K	5000K
	Volts	120V	120V	120V	120V	120V
	CRI	>90	>90	>90	>90	>90
	Beam Angel	120°	120°	120°	120°	120°
	Hours Rated	50000 hours	50000 hours	50000 hours	50000 hours	50000 hours
	Min Compartment Size	Ø4.9"x0.9"	Ø4.9"x0.9"	Ø4.9"x0.9"	Ø4.9"x0.9"	Ø4.9"x0.9"
	Operating Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
<b>Electrical</b>	Power Factor	>0.9	>0.9	>0.9	>0.9	>0.9
	Lighting type	Edge-lit	Edge-lit	Edge-lit	Edge-lit	Edge-lit
	Driver type	Flicker free, isolated	Flicker free, isolated	Flicker free, isolated	Flicker free, isolated	Flicker free, isolated
	Operating Temp.	-4°F to 104°F	-4°F to 104°F	-4°F to 104°F	-4°F to 104°F	-4°F to 104°F
<b>Physical</b>	Lamp body	ADC12	ADC12	ADC12	ADC12	ADC12
	LGP	PMMA	PMMA	PMMA	PMMA	PMMA
	Lens Material	Plastic	Plastic	Plastic	Plastic	Plastic
	Housing Color	White	White	White	White	White
<b>Additional Information</b>	Weight (Kg)	0.28	0.28	0.28	0.28	0.28
	Additional Info	6 way CCT	6 way CCT	Single CCT	Single CCT	Single CCT
	Dimming	Yes	Yes	Yes	Yes	Yes
	Warranty	5 years	5 years	5 years	5 years	5 years
	Safety Listing	CETLus-Listed	CETLus-Listed	CETLus-Listed	CETLus-Listed	CETLus-Listed
<b>Compliance</b>	Location Rating	Wet	Wet	Wet	Wet	Wet
	Energy Star	YES	YES	YES	YES	YES
	DLC Approved	No	No	No	No	No
	DLC ID	No	No	No	No	No

## Features & Specifications

<b>Construction</b>	<ul style="list-style-type: none"> <li>• Construction: Aluminum with frosted lens</li> <li>• Edgelite provide uniform illumination</li> <li>• High lighting efficiency</li> <li>• CCT switches are placed discretely inside the driver housing</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Easy installation and fast connection</li> </ul>
<b>Performance Data</b>	<ul style="list-style-type: none"> <li>• Available in 2700k/3000k/3500k/4000k/5000k/6000k switchable color temperature, Or single CCT 3000K/4000K/5000K</li> <li>• 90+ CRI</li> <li>• Electrical ratings: 120v/50-60Hz</li> <li>• Estimated life of over 100 000 hours to L70</li> <li>• ELV&amp;TRIAC Dimming</li> <li>• Isolated driver, flicker free</li> <li>• Operating temperature: -20°C /-4°F to 40°C/104°F</li> </ul>
<b>Compliances</b>	<ul style="list-style-type: none"> <li>• ETL certified for wet locations</li> <li>• ES listed</li> </ul>

## Dimensions & Weights

Model	MG-RP4W9	VO-RP4W9
Diameter in.(cm)		4.92in (12.5)
Height in. (cm)		0.90in (2.2)
Net weight (lbs)		0.617

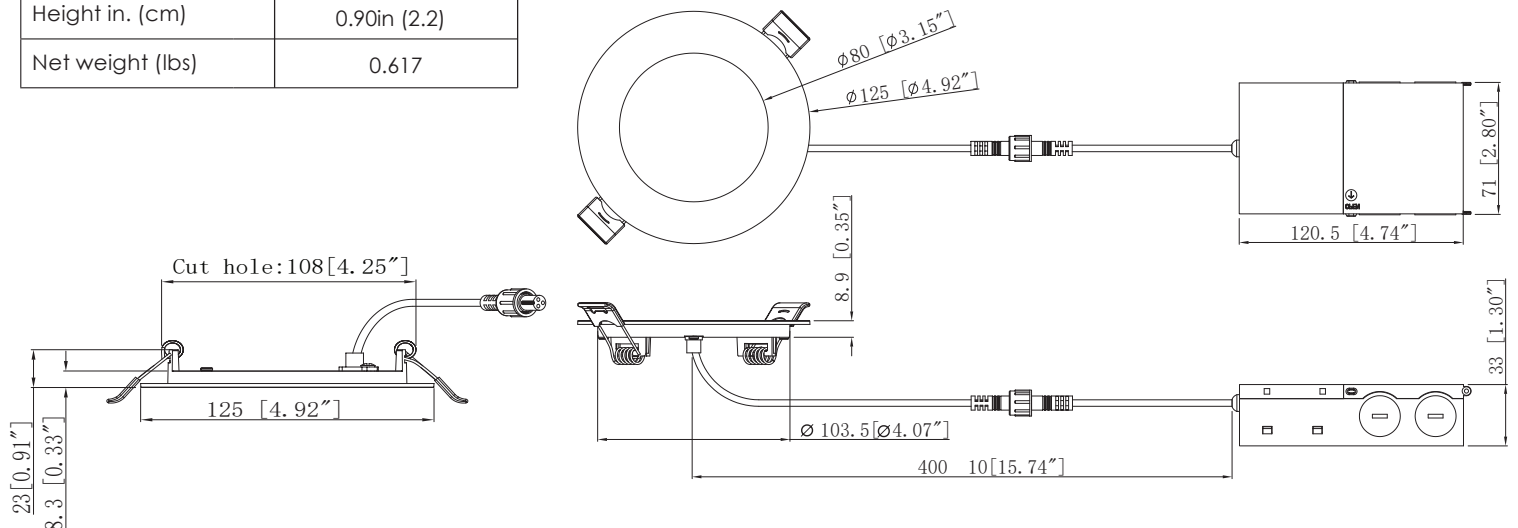

### Product Details

