

N1AD508AM-M (Order no. 090546)

Single limit switch N1AD, chisel plunger with external diaphragm, cable entry M16x1.5

- ▶ Chisel plunger
- ▶ Housing according to DIN 43693
- ▶ 2 x cable entry M16 x 1.5
- ▶ 1 pos. driven contact
- ▶ Exterior diaphragm



Approach direction



Horizontal

Can be adjusted in 90° steps


Exterior diaphragm

Protection against heavy soiling (dust) and aggressive coolants.


Switching element

508 Slow-action switching contact 1 positively driven contact (→)

Connection examples

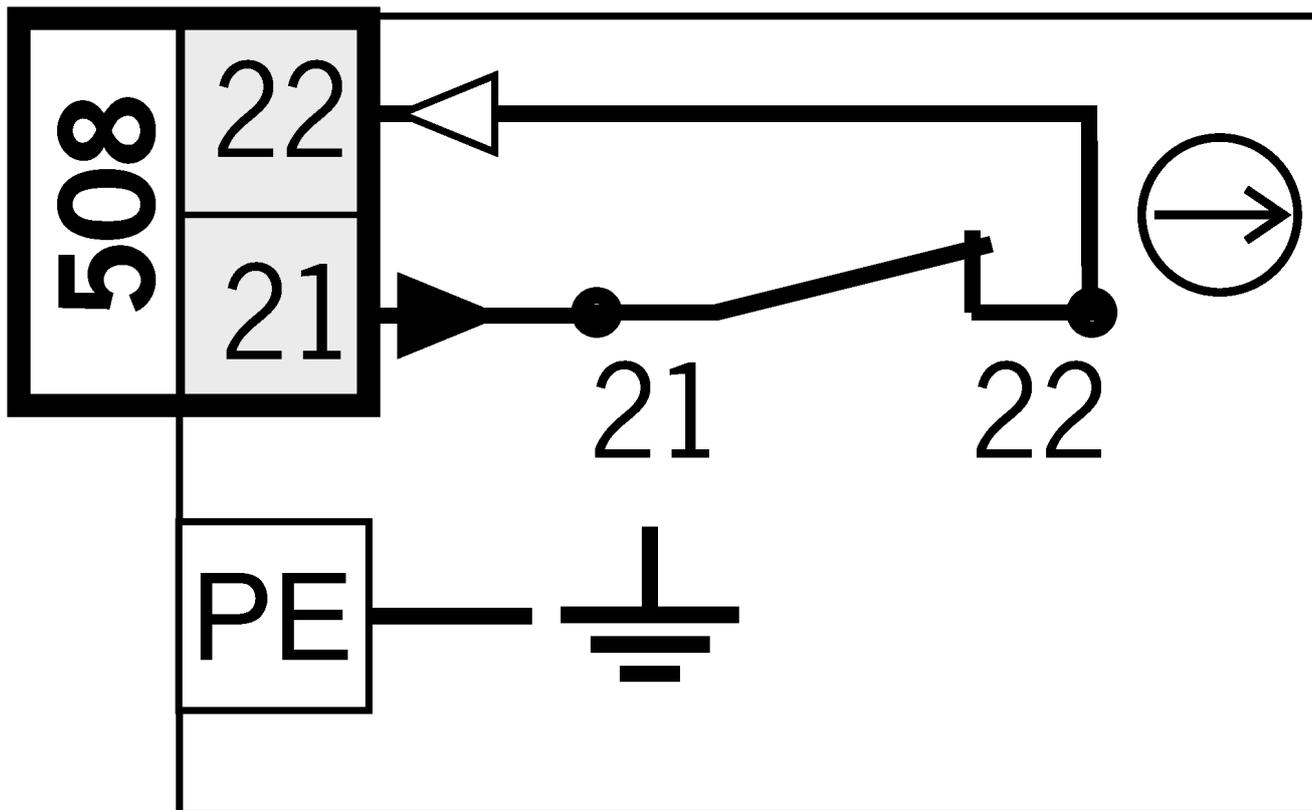

Shift travel diagrams

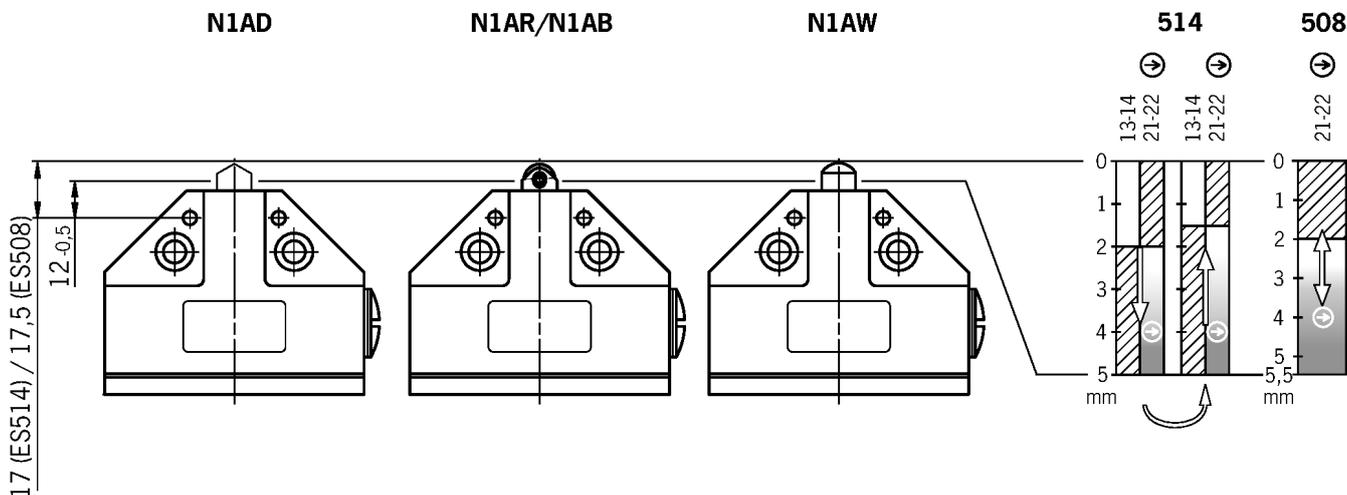

- g_Kontakte_geschlossen_sw.eps Contacts closed
- g_Kontakte_offen_sw.eps Contacts open
- g_Kontakte_zwangsgeoeffnet_sw.eps Contacts positively driven