


MGB-L1-ARA-AP7A1-M-R-121404 (Order no. 121404)

Locking module MGB-L1-ARA..., (guard locking by spring force) with 2 pushbutton, emergency stop, selector switch

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Emergency stop according to ISO 13850
- ▶ 2 pushbuttons (illuminated)
- ▶ With lens set, 6 pcs.
- ▶ Selector switch (form V, 90°)
- ▶ With cable entry
- ▶ Unicode

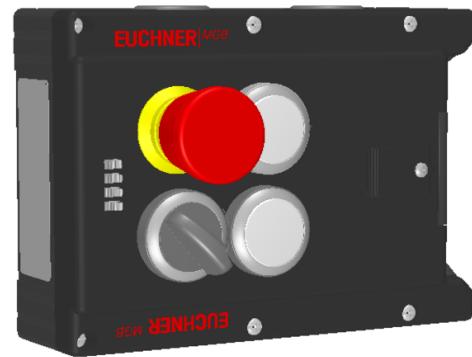

Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force
 L1... (closed-circuit current principle, mechanically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

OD ON when the door is closed
 OT Bolt tongue inserted into the evaluation module
 OL Guard locking solenoid in locked position
 OI Diagnostics; there is a fault

Emergency stop device

S1 2 positively driven contacts and 1 NO contact (e.g. monitoring contact), emergency stop with turn-to-reset, not illuminated

Pushbuttons

S2 1 NO contact, illuminated
 S3 1 NO contact, illuminated

Selector switch

S4 Selector switch with 2 positions (form V, 90°). The switch latches in both positions