

MGB2-L1-MLI-U-YB1D5-MA-L-161650 (Order no. 161650)

Locking module MGB2-L1-MLI... (2 pushbuttons, emergency stop, closed-circuit current principle, door hinge on left)

- ▶ Guard locking for the protection of persons or processes
- ▶ Locking module MGB2 for connection to a bus module MBM
- ▶ Interlocking with monitored guard locking
- ▶ Category 4/PL e for the evaluation of all safety functions
- ▶ 1 illuminated emergency stop according to ISO 13850
- ▶ 2 illuminated white pushbuttons with symbol
- ▶ 3 cut-outs for slide-in labels
- ▶ Adjustable door hinge; factory setting: left
- ▶ Unicode
- ▶ Compatible with all Modular devices



Guard locking type

MGB2- Guard locking by spring force. Release by applying voltage to the guard locking solenoid.
L1... (closed-circuit current principle)



Door hinge

On the locking modules, the door hinge can be changed from right to left and vice versa at any time with little effort.



Slide-in labels

The user can produce custom labeling using the enclosed slide-in labels. (3 pcs., blank)

Dimensional drawings

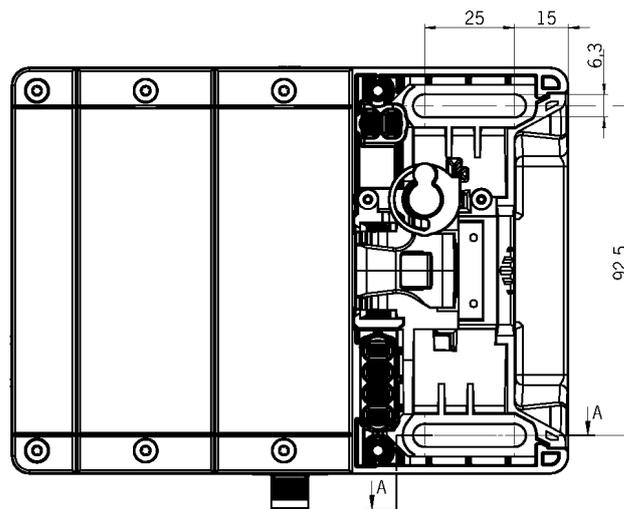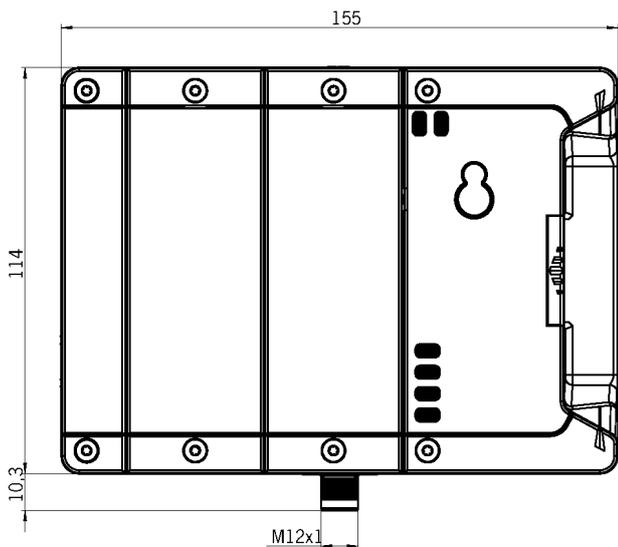


A-A

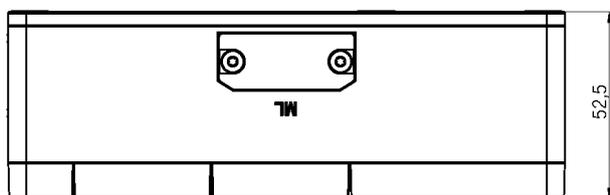

Dimensional drawings

...-R-...

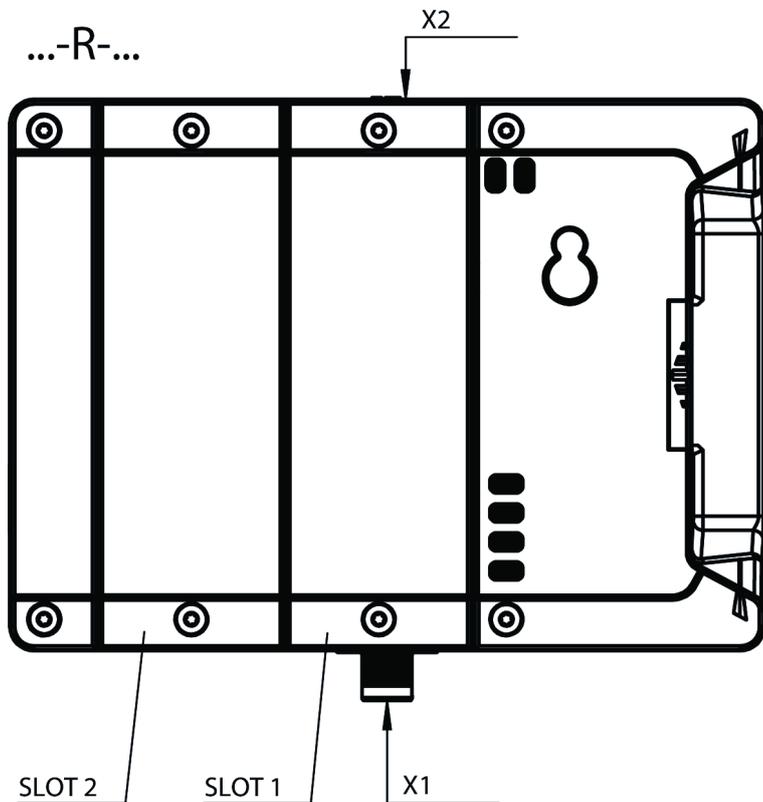

...-L-...

