

ZSA086681C1979 (Order no. 086681)

ZSA, 3-stage, with LEDs and plug connector MR8

- ▶ Housing G1
- ▶ 3-stage function
- ▶ Plug connector
- ▶ 2 LEDs
- ▶ Actuator for safety switch NZ.VZ or TZ



Similar to figure

Switching element

2220 2 NO/NC 

LEDs

The LEDs are used for visual feedback direct at the enabling switch.


Actuator

Suitable for safety switch NZ.VZ/TZ (see catalog for safety switches with metal housing). By using an appropriate safety switch as the holder for the enabling switch, the position of the enabling switch can be safely sampled. By suitable integration of this combination, the signal from the safety switch can be used, e.g. as an operating mode selector switch, when the actuator is removed (removal of the enabling switch).

3-stage function

Enabling function is active only in the second stage (center position, actuating point). If the pushbutton is released or pushed further (panic function), the enabling is removed (dependent on the wiring, see function sequence).

Dimensional drawings

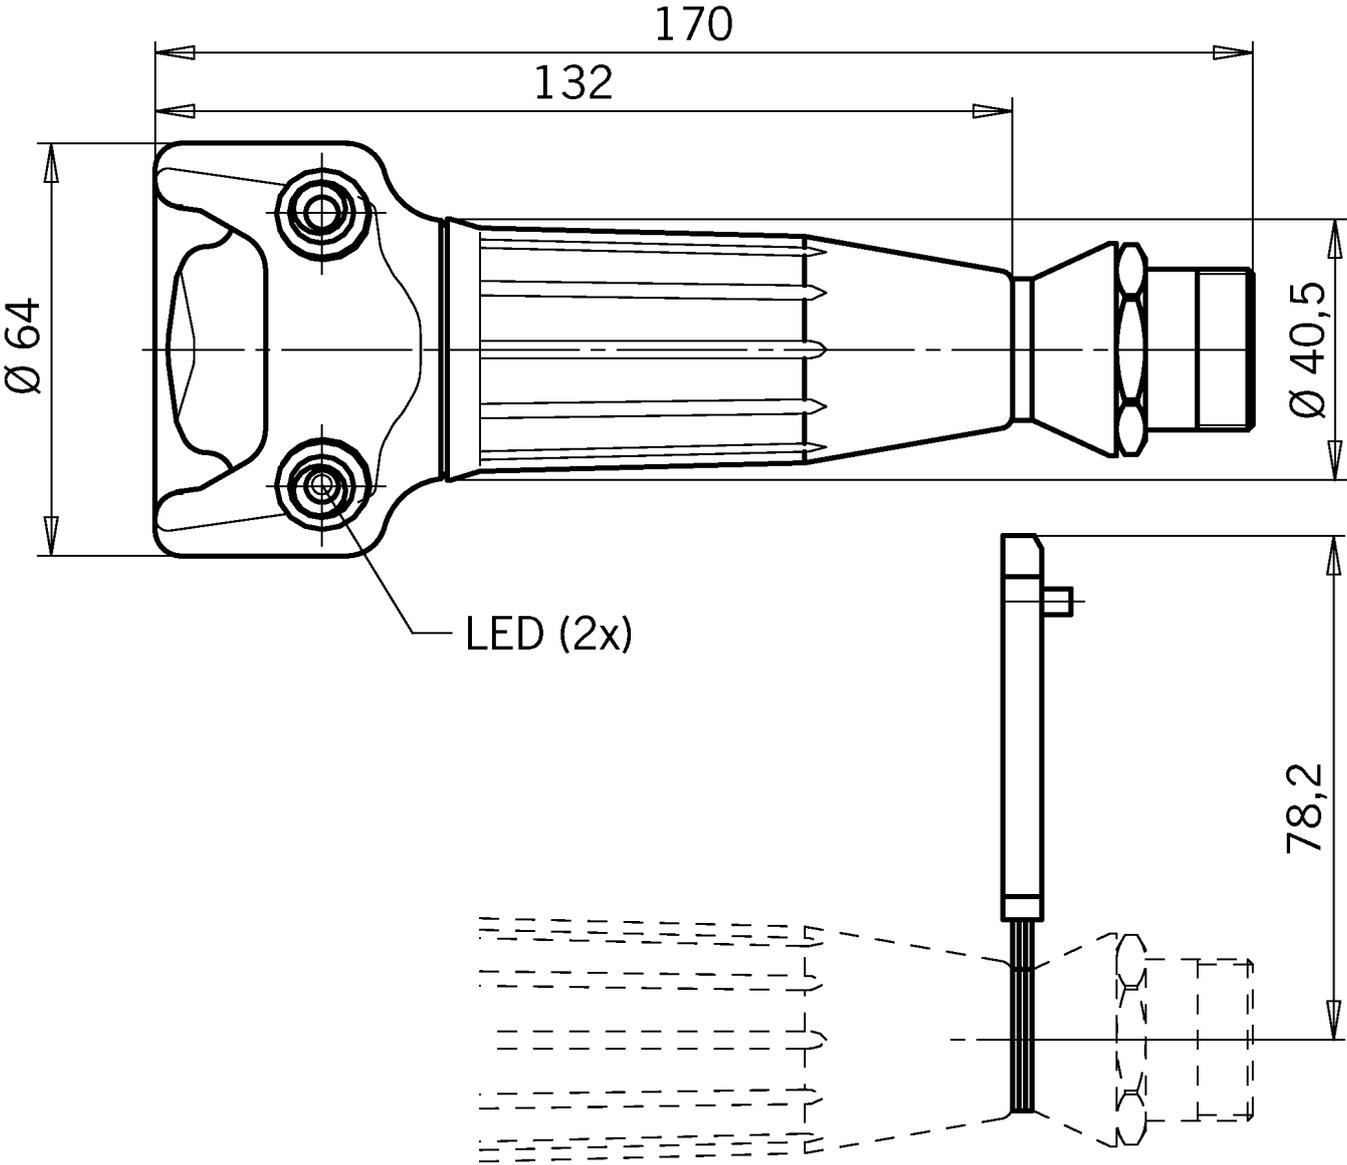

Dimensional drawings

