

## SPERREINSATZ MIT KETTE (Order no. 091305)

### Lockout bar NZ.VZ/TZ, 3 holes


- ▶ Prevents unintentional closing of the door
- ▶ Can be secured with padlocks



With the safety door open, it can be slid into the actuating head on a switch type 2 (NZ.VZ/TZ) instead of an actuator. Removal can be prevented using a commercially available padlock. For the protection of persons in areas with a possible hazard.

Cannot be used in combination with the protective plate.

Dimensional drawings

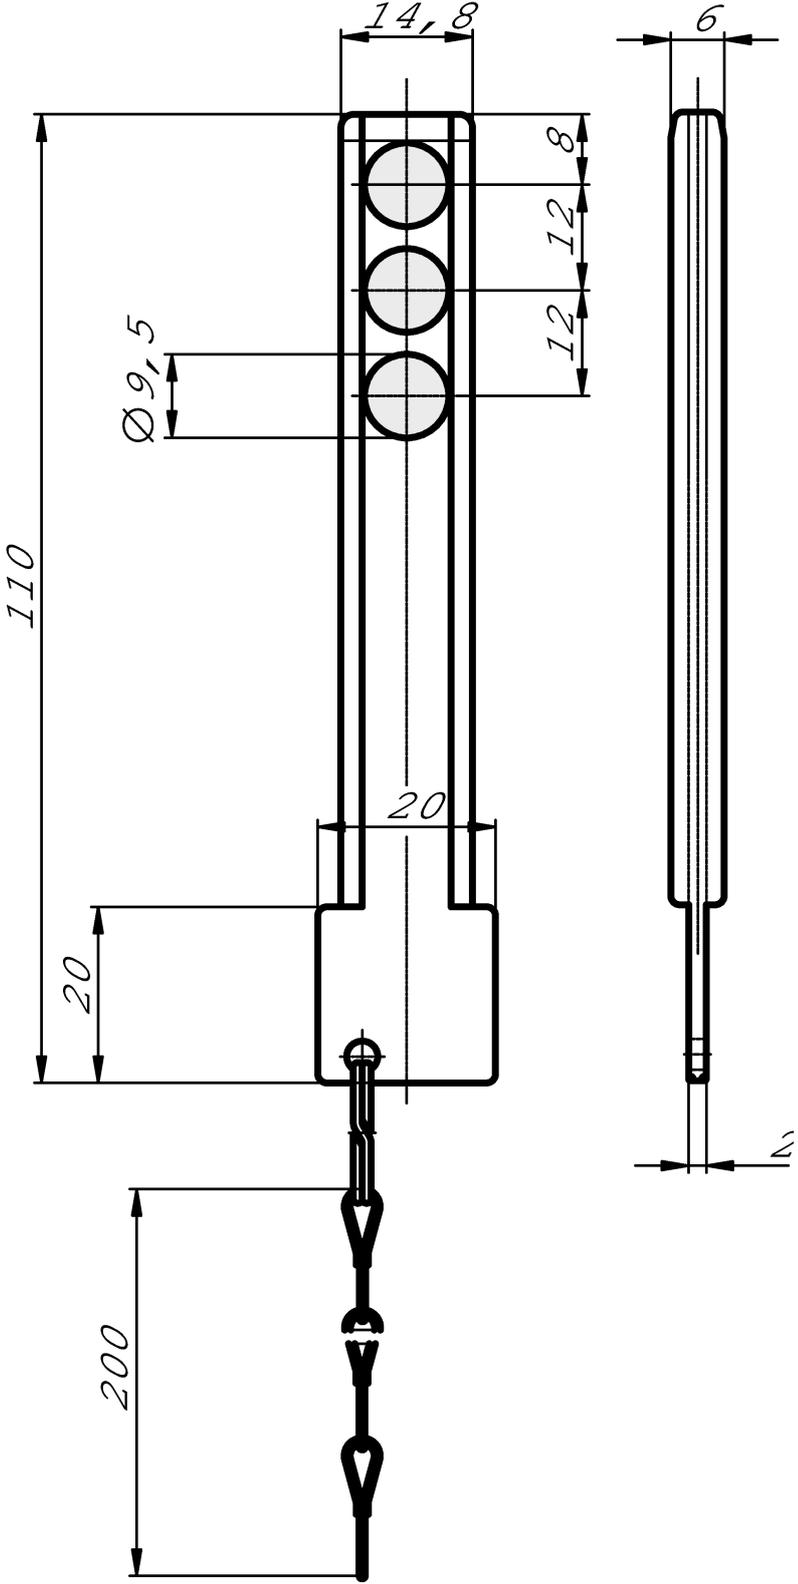

## Technical data

### Mechanical values and environment

Number of bores	3
Pin diameter	0 ... 9.5 mm
Storage temperature	-25 ... 70 °C
Material	Aluminum

### Miscellaneous

Additional feature	with chain
--------------------	------------