

NZ1RK-538-M (Order no. 090906)

Safety switch NZ.RK, roller plunger, steel roller \varnothing 8 mm, cable entry M20 x 1.5

- ▶ Roller plunger, steel roller \varnothing 8 mm
- ▶ Cable entry M20 x 1.5
- ▶ 2 pos. driven contact



Approach direction




Horizontal

Can be adjusted in 90° steps

Switching element

538H Slow-action switching contact 2 positively driven contacts 

Dimensional drawings

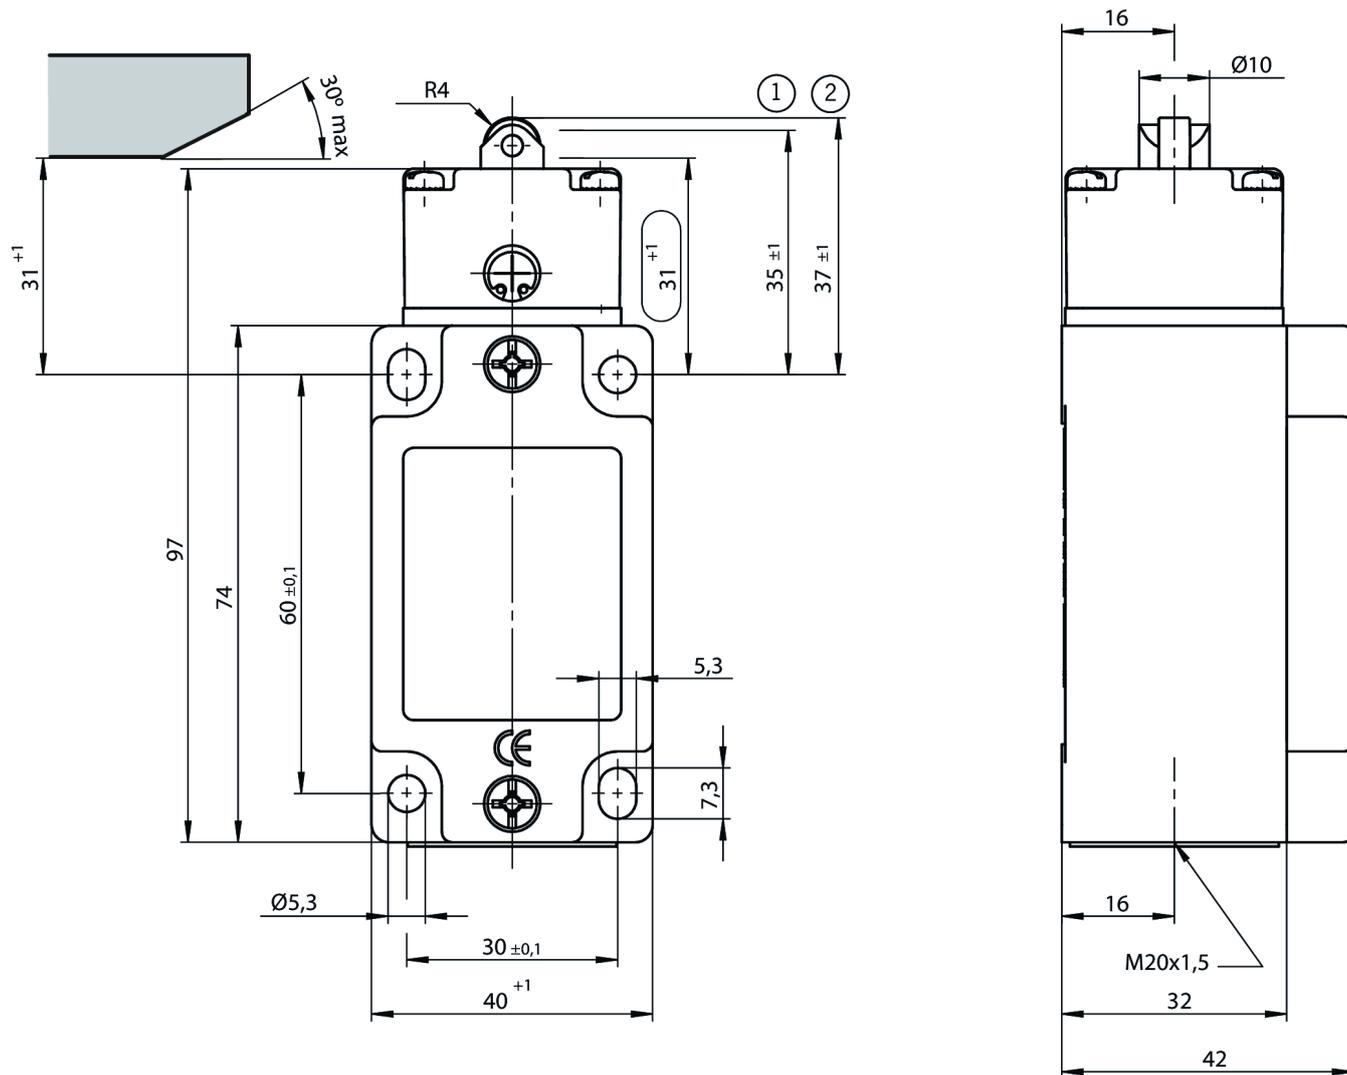

1 Operating point

2 Free position

Connection examples

