


MGB-L1-APA-AR3A1-M-L-159349 (Order no. 159349)

Technical data

Approvals

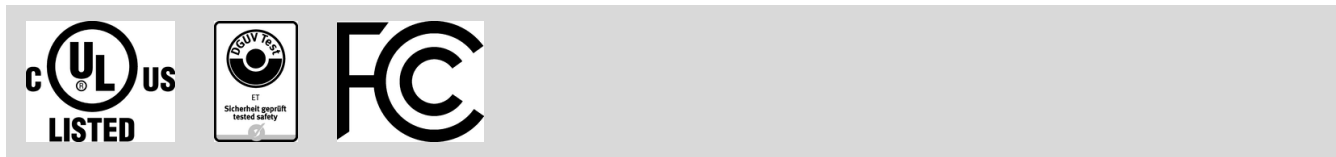

Operating and display elements

Occupancy diagram

L1

Item	Color	Extras	Note slide-in label	Version	Switching element	Slide-in label	Number	Designation1	LED
1				Illuminated emergency stop	2 PD				
2				Illuminated pushbutton	1NO				
3				Illuminated pushbutton	1NO				
4				Illuminated pushbutton	1NO				

Electrical connection values

Connection cross section	
(rigid/flexible)	0.13 ... 1.5 mm ² (AWG 24 ... AWG 16)
(rigid/flexible) with cable end sleeve with collar according to DIN 46 228/1	0.25 ... 0.75 mm ²
(rigid/flexible) with cable end sleeve according to DIN 46 228/1	0.25 ... 1.5 mm ²
Rated insulation voltage U _i	30 V
Rated impulse voltage U _{imp}	1.5 kV
Discrepancy time	
between FO1A and FO1B	max. 10 ms
Utilization category	
DC-13	

	24V 200mA (Caution: outputs must be protected with a free-wheeling diode in case of inductive loads.)
Risk time according to EN 60947-5-3	max. 350 ms
Risk time according to EN 60947-5-3, extension for each additional device	max. 5 ms
Safety class	III
Transponder coding	Unicode
Degree of contamination (external, according to EN 60947-1)	3
Solenoid control input IMP1, IMP2, IMM	
Test pulse duration	max. 5 ms
Test pulse interval	min. 100 ms
Controls and indicators	
Breaking capacity	max. 0.25 W
Switching voltage	U_A V
Switching current	1 ... 10 mA
LED power supply	24 V DC
Emergency stop	
Breaking capacity	max. 0.25 W
Switching voltage	5 ... 24 V
Switching current	1 ... 100 mA
LED power supply	24 V DC
Monitoring outputs OD, OT, OL, OI	
Output type	Semiconductor outputs, p-switching, short circuit-proof
Output voltage	$U_A - 2V \dots U_A$ V DC (Value at a switching current of 50mA without taking into account the cable lengths)
Output current	max. 50 mA
Safety outputs F01A, F01B	
Output type	Semiconductor outputs, p-switching, short circuit-proof
Output voltage	

$$U_{F01A} / U_{F01B} \text{ HIGH}$$