

SN02D16-502-MC1938 (Order no. 088162)

Series SN... 16 mm, mechanical


- ▶ Plunger spacing 16 mm
- ▶ Upright housing, small flange
- ▶ Degree of protection IP67 according to IEC 60529



Switching element

ES 502 E Snap-action switching contact 1 NC + 1 NO

Dimensional drawings

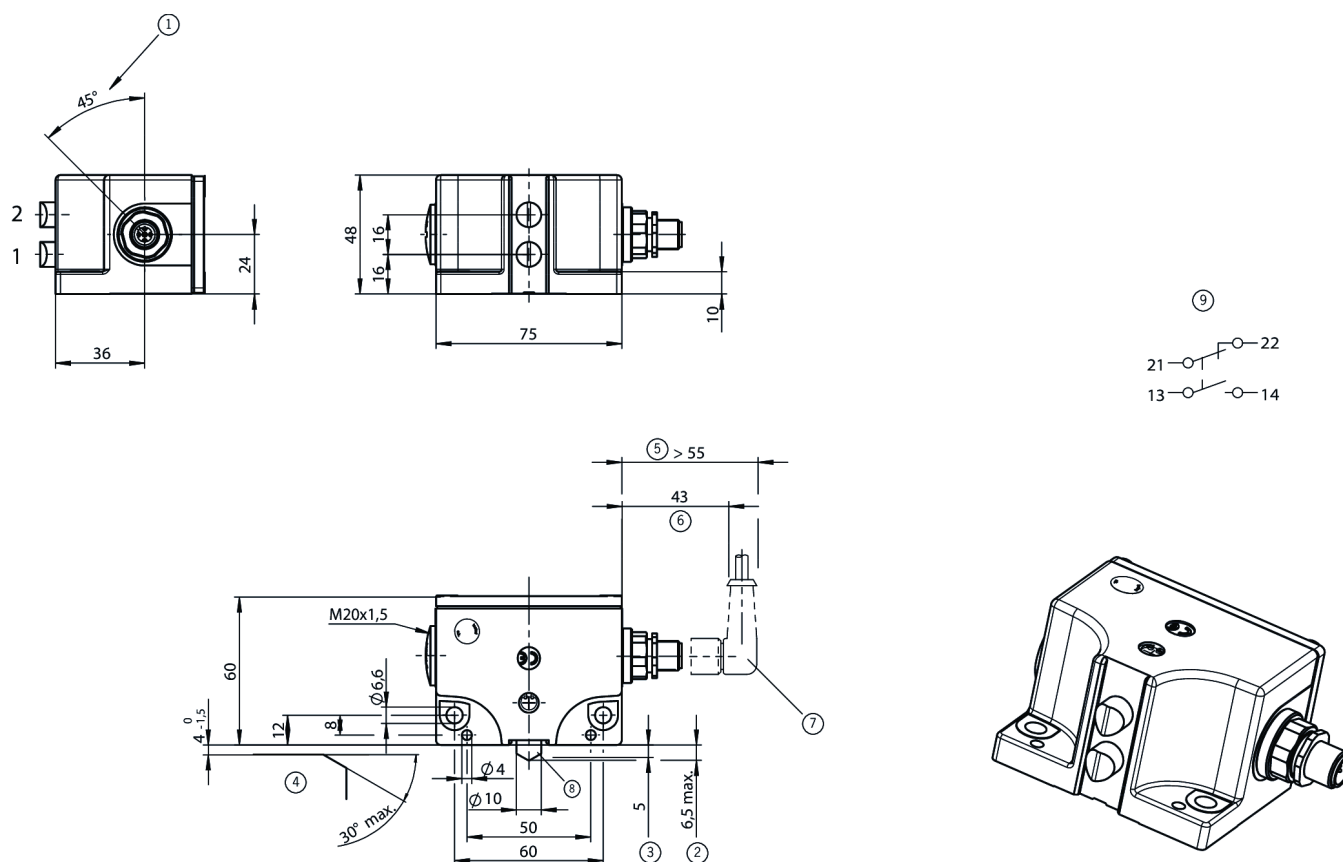

1 Guide lug aligned

2 Free position

3 Operating point

4 Dog

5 Right-angle plug connector

6 In the inserted and screwed tight state

7 Right-angle plug connector: cable outlet adjustable max. 270° Default setting for cable outlet to the right.

8 A shorter mechanical life is to be anticipated if the plunger is over-actuated.

9 Snap-action switching contact with one NO contact and one NC contact. Double gap contacts, electrically isolated switching contacts.

Connection examples

ES 502 E

