

## AE-L-C-H-123411 (Order no. 123411)






### Lockout bar CTP/CTA

- ▶ Prevents unintentional closing of the door
- ▶ Can be secured with padlocks



With the safety door open, it can be slid into the actuating head of the CTP instead of an actuator. Removal can be prevented using a commercially available padlock (max. 3 ea.). For the protection of persons in areas with a possible hazard.

**Dimensional drawings**

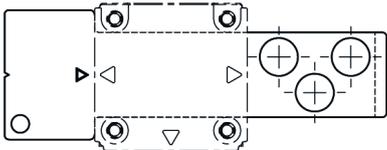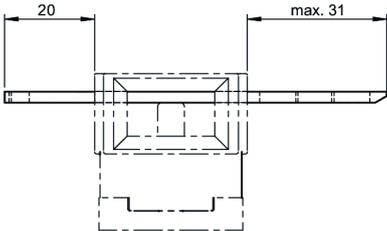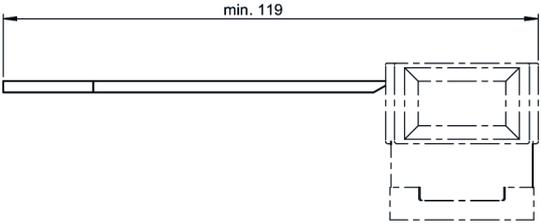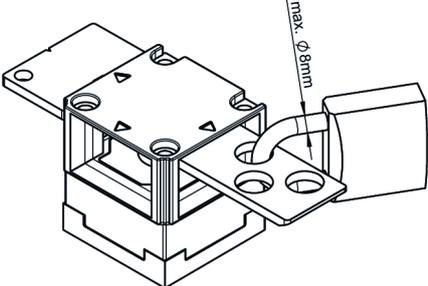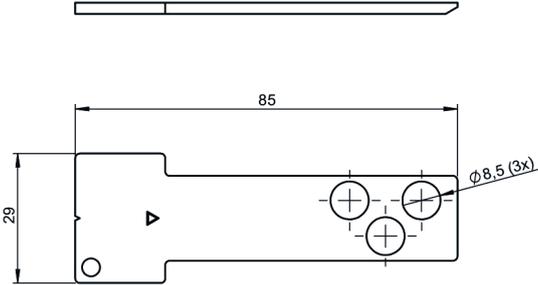

## Technical data

### Mechanical values and environment

Number of bores	3
Pin diameter	4 ... 8 mm
Storage temperature	-25 ... 70 °C
Material	Stainless steel