


## MGB-L0HB-PNA-L-113233 (Order no. 113233)

### Interlocking set MGB-L0...-PN with 4 control elements, 7/8" and M12 plugs

- ▶ Interlocking (without guard locking)
- ▶ With key-operated rotary switch (form V, 90°)
- ▶ 2 illuminated white pushbuttons with symbol
- ▶ Operating mode selector
- ▶ Connection via 7/8" and M12 plugs
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ Unicode

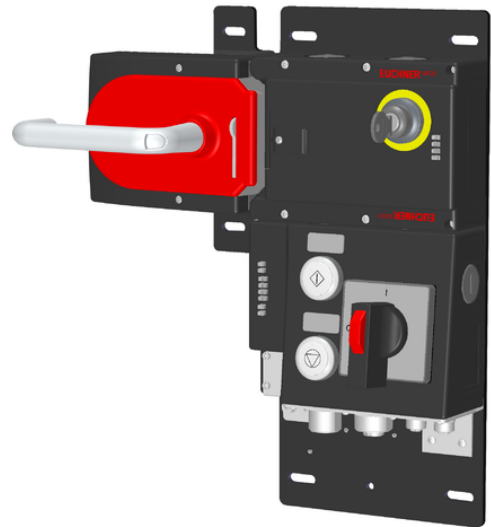


### Profinet connection

7/8" plugs according to ANSI/B93.55M-1981 and M12 plugs (d-coded) according to IEC 61076-2-101

### Profinet RT switch

Point-to-point topology network structure due to integrated RT switch.

### Dimensional drawings

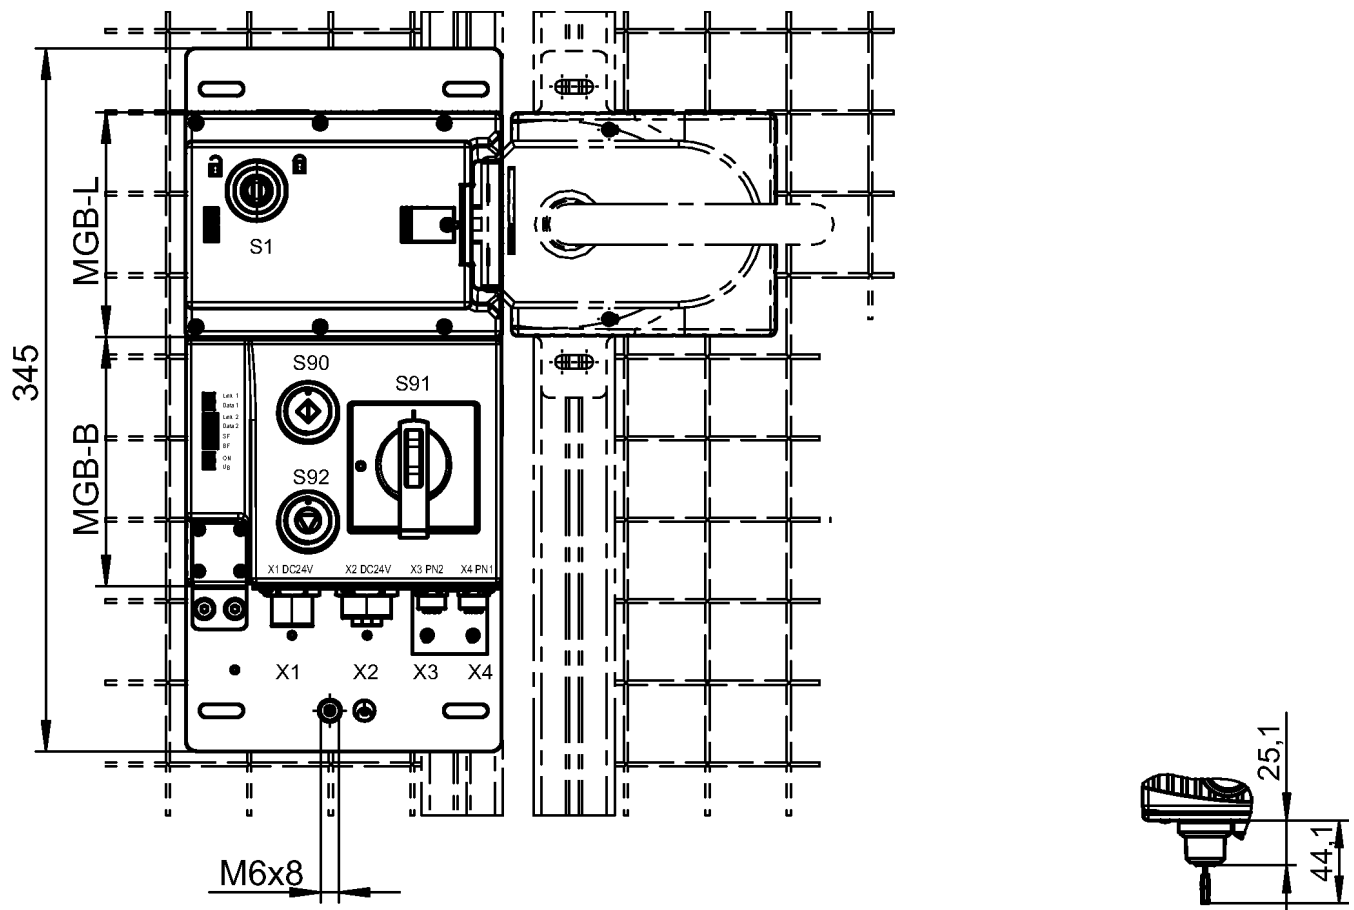

## Components



### 111839

MGB-H-AA1A6-L-111839

Handle module MGB-H... with automatically extending lockout mechanism

- ▶ Intelligent bolt tongue
- ▶ Fold-out lockout mechanism
- ▶ Second automatically extending lockout mechanism
- ▶ Door handle
- ▶ Mounting plate



### 113615


MGB-L0B-PNA-L-113615

Interlocking module and bus module MGB-L0...-PN with 4 control elements, 7/8" and M12 plugs

- ▶ Interlocking (without guard locking)
- ▶ With key-operated rotary switch (form V, 90°)
- ▶ 2 illuminated white pushbuttons with symbol
- ▶ Operating mode selector
- ▶ Connection via 7/8" and M12 plugs
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ Unicode

## Technical data

### Approvals

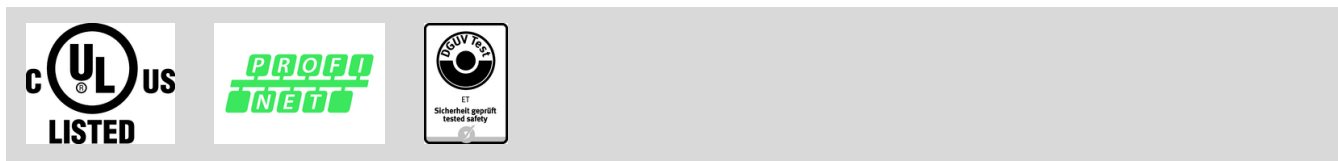

### Handle modules MGB-H-AA1A6-L-111839 (Order no. 111839)

#### Mechanical values and environment

|                          |                                                                                      |
|--------------------------|--------------------------------------------------------------------------------------|
| Installation orientation | Door hinge DIN left                                                                  |
| Storage temperature      | -25 ... 70 °C                                                                        |
| Degree of protection     | IP65                                                                                 |
| Ambient temperature      | -20 ... 55 °C                                                                        |
| Material                 |                                                                                      |
|                          | Housing Fiber glass reinforced plastic, nickel-plated die-cast zinc, stainless steel |

#### Miscellaneous

|                        |                                                     |
|------------------------|-----------------------------------------------------|
| Product version number | V3.0.0                                              |
| Additional feature     | with mounting plate and automatic lockout mechanism |



### Interlocking modules MGB-L0B-PNA-L-113615 (Order no. 113615)

#### Workspace

|                                      |                                                                                |
|--------------------------------------|--------------------------------------------------------------------------------|
| Secured switch-off distance $s_{ar}$ |                                                                                |
| Only with sliding door               | 20 mm                                                                          |
|                                      | (Only applies for use on sliding doors with deactivated guard lock monitoring) |