

NM12AL-M (Order no. 079120)

Safety switch NM.AV / NM.AL, hinged actuator as solid shaft, long housing, cable entry M16 x 1.5

- ▶ Hinged actuator as solid shaft, shaft length 110 mm
- ▶ long housing
- ▶ 3 x cable entry M16 x 1.5
- ▶ 2 pos. driven contact
- ▶ 1 NO contacts





Head alignment

Actuating head can be adjusted in 90° steps.

Switching element

ES12 Slow-action switching contact 2 positively driven contacts $\ominus \rightarrow$ + 1 NO contact

Dimensional drawings

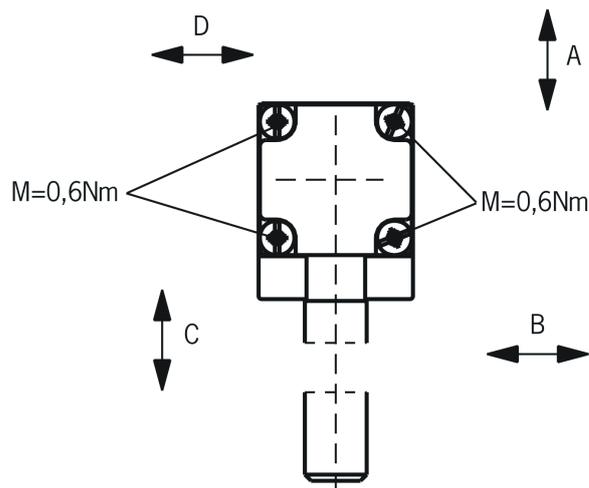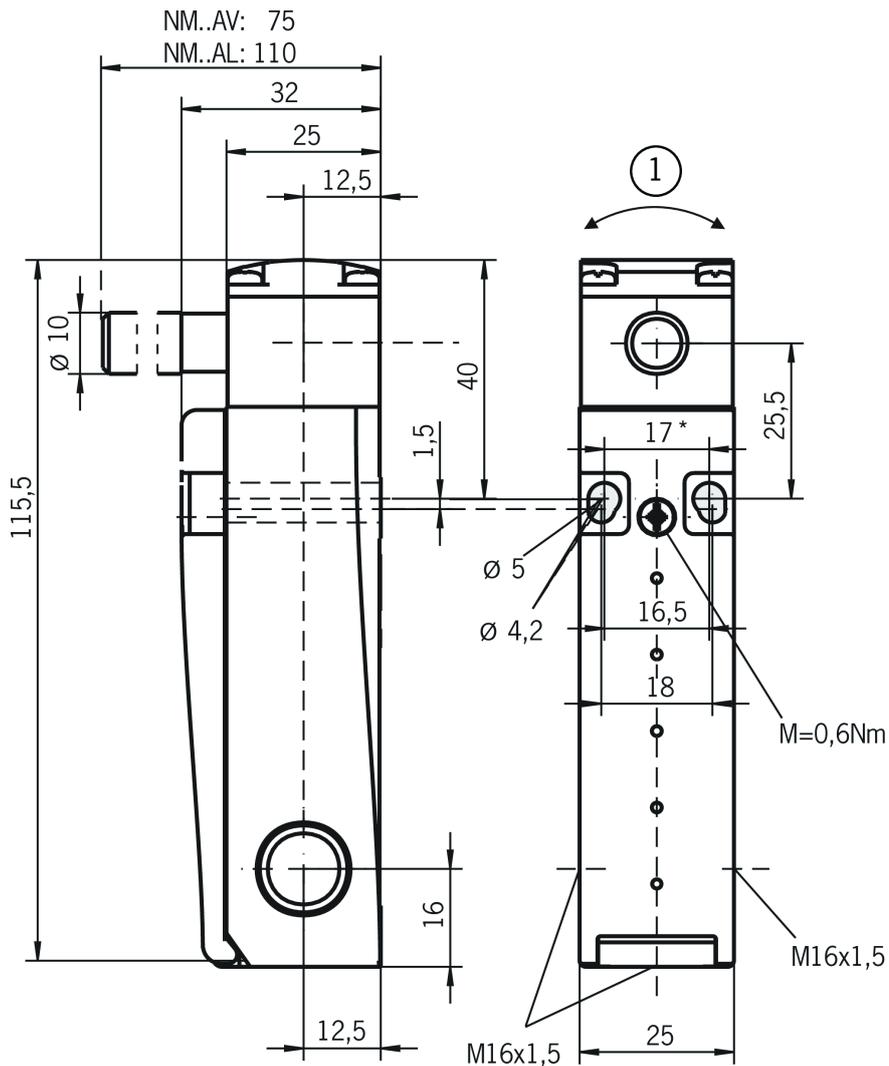

* fixed positioning for safety-related applications (M5)

1 Actuating direction

Connection examples

