

NZ2HS-538SVM5 (Order no. 090869)

Safety switch NZ.HS, lever arm with steel roller, plug connector M12

- ▶ Lever arm, steel roller $\varnothing$ 18 mm
- ▶ Version A according to EN 50041
- ▶ Plug connector M12, 5-pin
- ▶ 2 pos. driven contact



Approach direction



Horizontal

Can be adjusted in 90° steps


Switching direction adjustable

Right, left or both sides

Switching element

538H Slow-action switching contact 2 positively driven contacts

Dimensional drawings

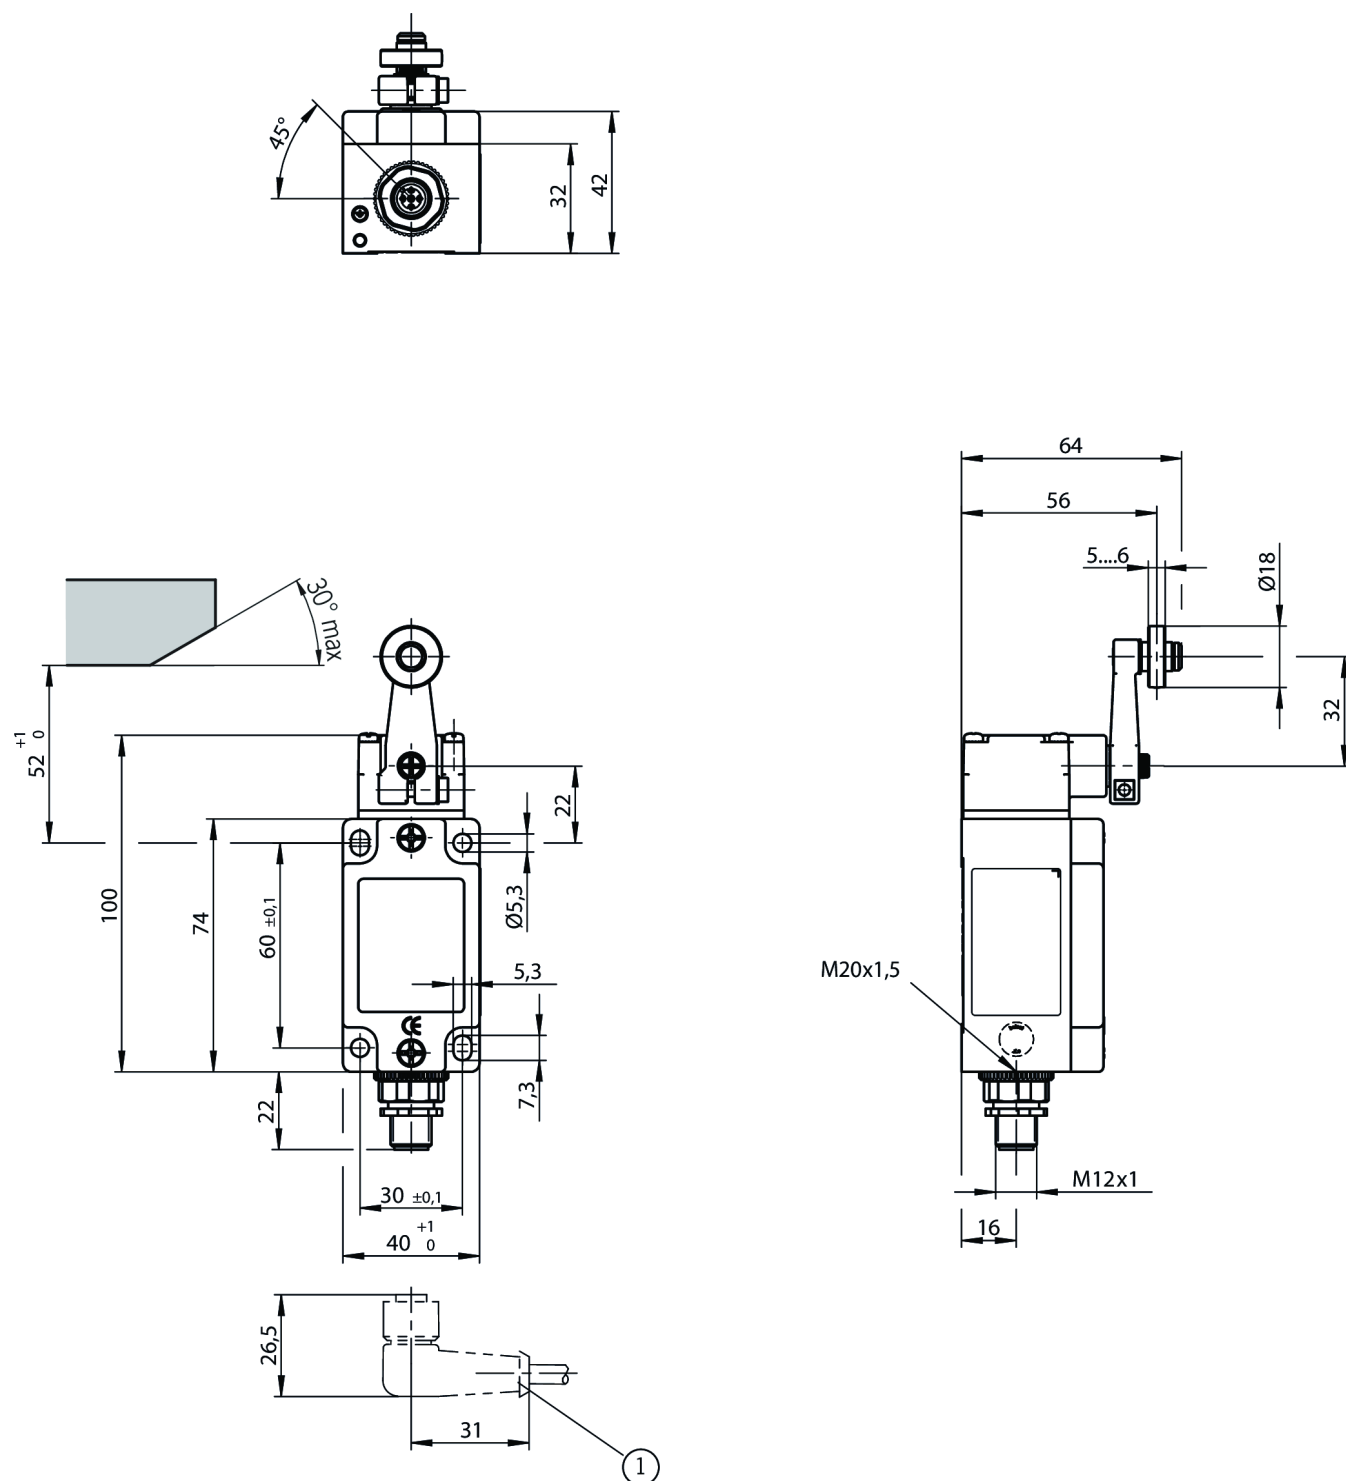

1 Right-angle plug connector: cable outlet adjustable max. 270° Default setting for cable outlet to the right.

Connection examples

