

NZ2HB-511SVM5 (Order no. 090861)

Safety switch NZ.HB, lever arm with plastic roller, plug connector M12

- ▶ Lever arm, plastic roller \varnothing 18 mm
- ▶ Version A according to EN 50041
- ▶ Plug connector M12, 5-pin
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts



Approach direction



Horizontal

Can be adjusted in 90° steps


Switching direction adjustable

Right, left or both sides

Switching element

511 Snap-action switching contact, 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact

Dimensional drawings

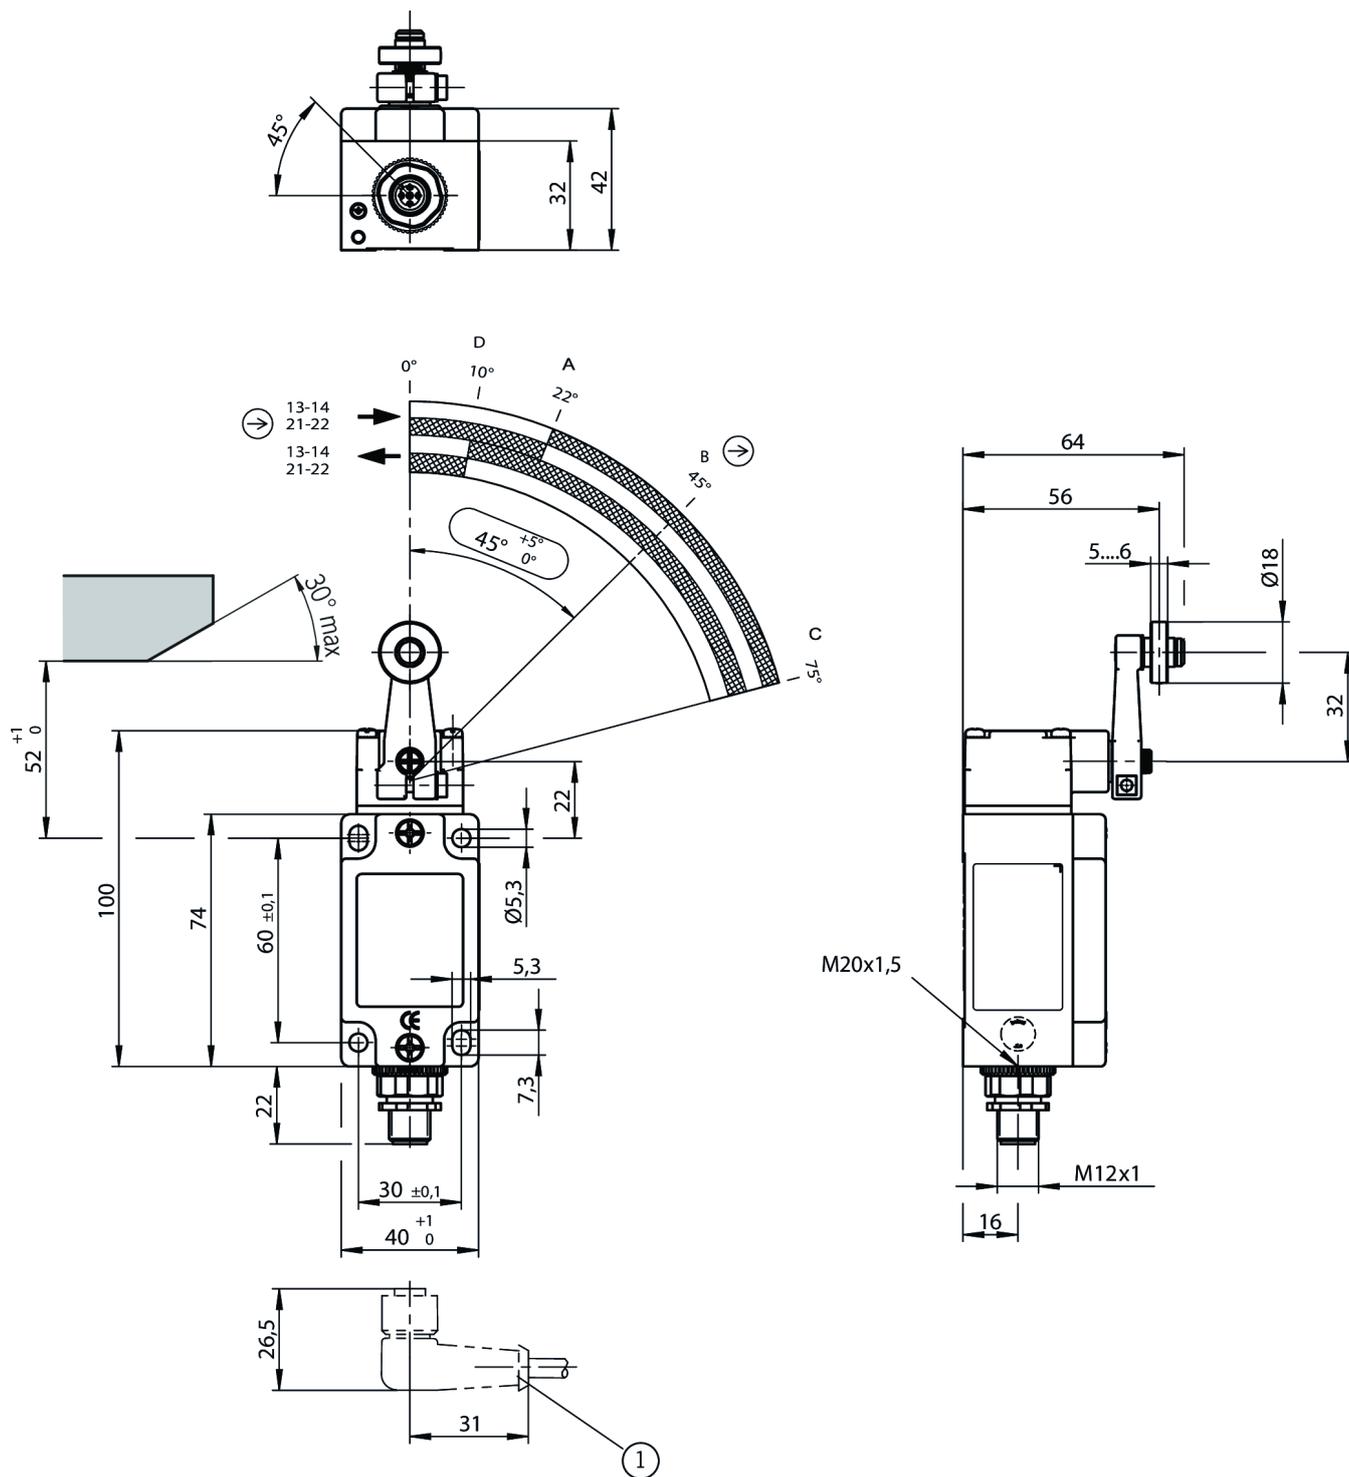

1 Right-angle plug connector: cable outlet adjustable max. 270°; default setting for cable outlet right.

A=Operating point

B=Positively driven

C=End position

D=Reset point

Connection examples

