

GLBF02R16-502-M (Order no. 085955)

Series GLBF... 16 mm, mechanical


- ▶ Plunger spacing 16 mm
- ▶ Horizontal housing
- ▶ Degree of protection IP67 according to IEC 60529



Switching element


ES 502 E Snap-action switching contact 1 NC + 1 NO

Dimensional drawings

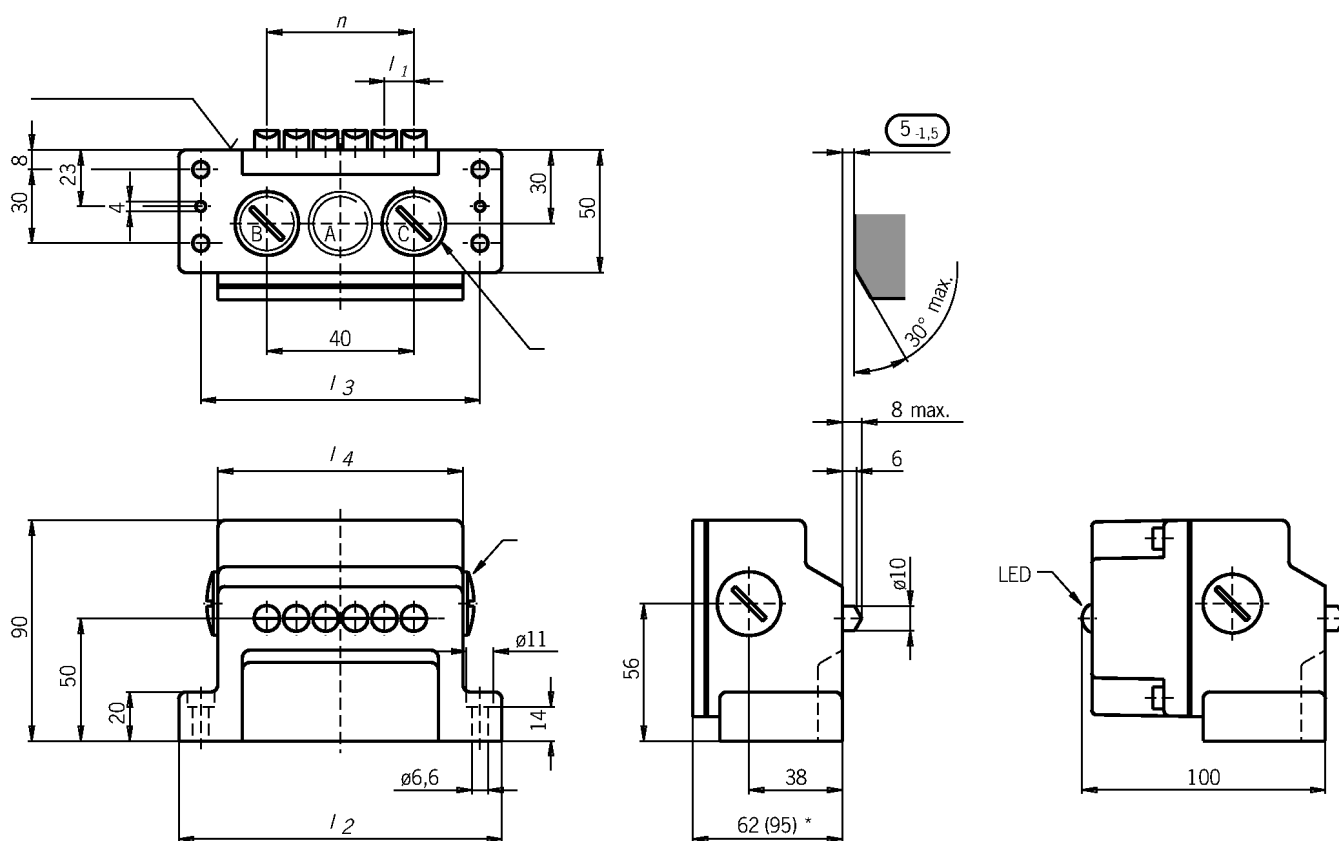

Connection examples

ES 502 E

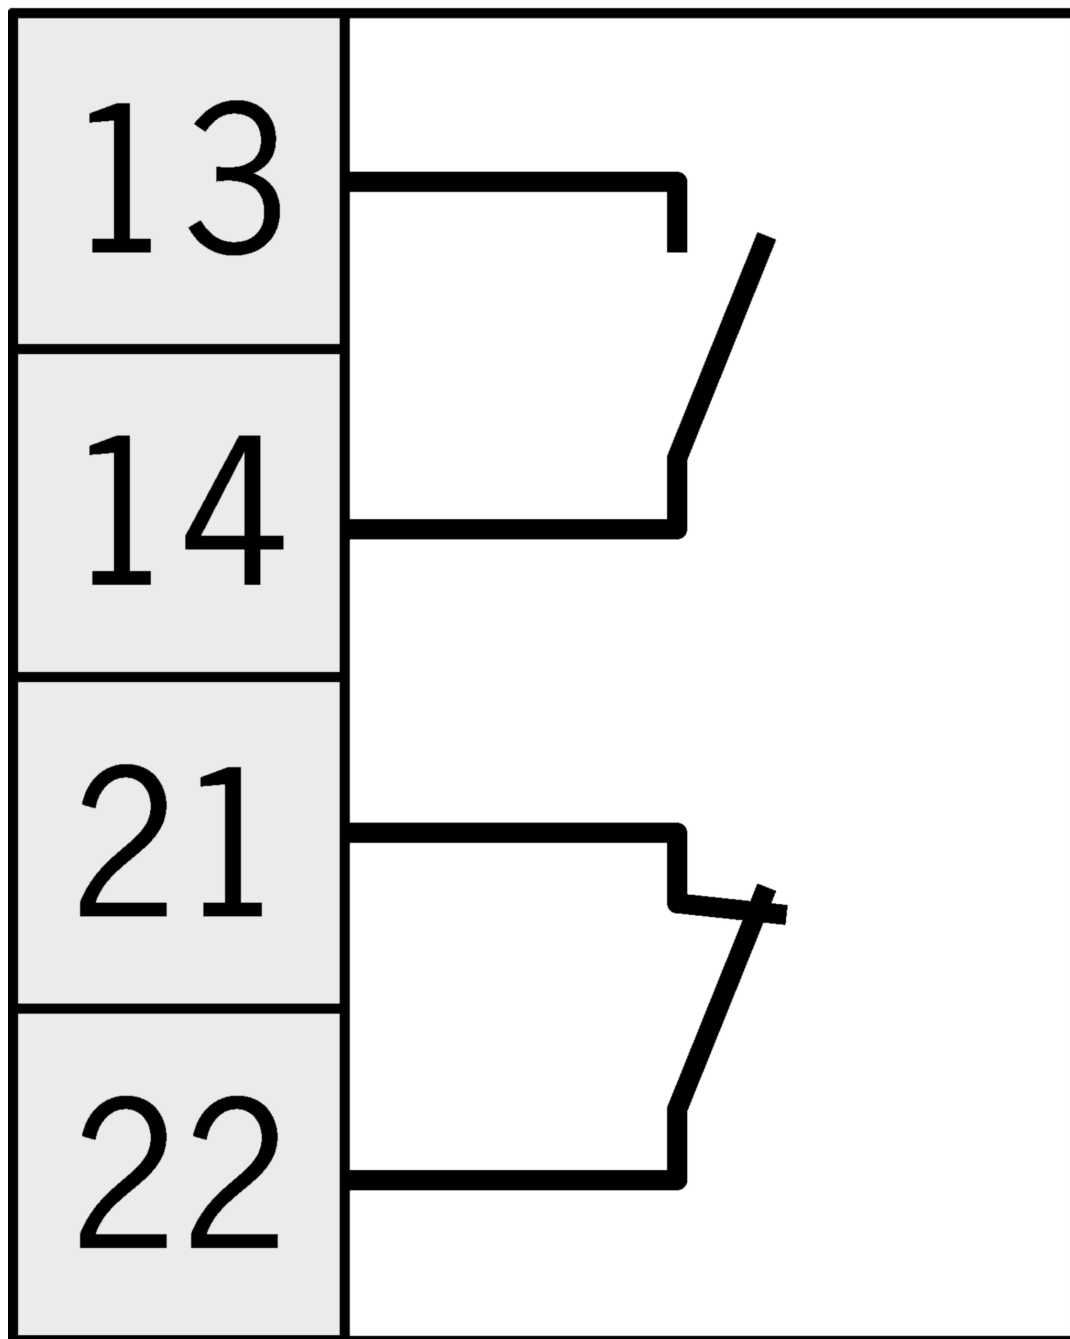

Technical data

Approvals



Electrical connection values

Fuse	max. 8 A gG
Connection cross section	0.34 ... 1.5 mm ²
Rated insulation voltage U_i	250 V
Rated impulse voltage U_{imp}	2.5 kV
Utilization category	
	AC-12 8 A 250 V
	AC-15 6 A 230 V
	DC-13 6 A 24 V

Switching current

min. at DC 12V min. 10 mA

thermal rated current I_{th}	8 A
--------------------------------	-----

Mechanical values and environment

Anfahrgeschwindigkeit	0.01 ... 80 m/min
Connection type	
	3 x M25 x 1.5
Number NC contacts	2
Number of switching elements	2
Number of NO contacts	2
Design	horizontal
Actuating element	
	Slide bearing Roller plunger
	(Operating point accuracy ± 0.01 . The reproducible operating point accuracy refers to the axial travel of the plunger after the switching element ES 502 E has been run-in with approx. 2,000 operating cycles.)
Actuating force	min. 20 N