


## MGB-L1H-APA-L-115179 (Order no. 115179)

### Locking set MGB-L1H-APA... (guard locking by spring force) with 2 pushbuttons, emergency stop

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850
- ▶ 1 pushbutton (illuminated, with symbol "Unlocked," wh)
- ▶ 1 pushbutton (illuminated, with symbol "Locked," wh)
- ▶ With cable entry
- ▶ Unicode

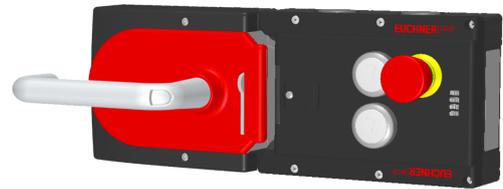

### Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force  
L1... (closed-circuit current principle, mechanically locked).

### Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

### LED indicator

The LED indicator indicates all important system and status information.

### Monitoring outputs

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault

### Emergency stop device

S1 2 positively driven contacts and 1 NO contact (e.g. monitoring contact), emergency stop with turn-to-reset, not illuminated

### Pushbuttons

- S2 1 NO contact, white, illuminated (symbol: unlocked)
- S3 1 NO contact, white, illuminated (symbol: locked)