

NZ1HS-2131-M (Order no. 090973)

Safety switch NZ.HS, lever arm with steel roller, cable entry M20 x 1.5

- ▶ Lever arm, steel roller \varnothing 18 mm
- ▶ Version A according to EN 50041
- ▶ Cable entry M20 x 1.5
- ▶ 3 pos. driven contact
- ▶ 1 NO contacts



Approach direction



Horizontal

Can be adjusted in 90° steps



Switching direction adjustable

Right, left or both sides

Switching element

2131H Slow-action switching contact 3 positively driven contacts \rightarrow + 1 NO contact

Dimensional drawings

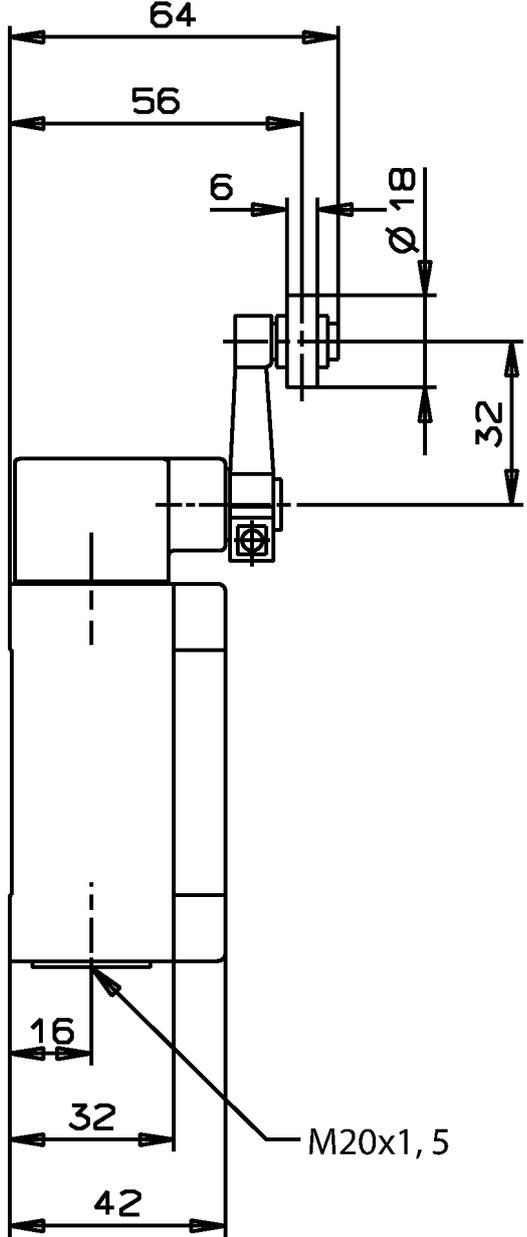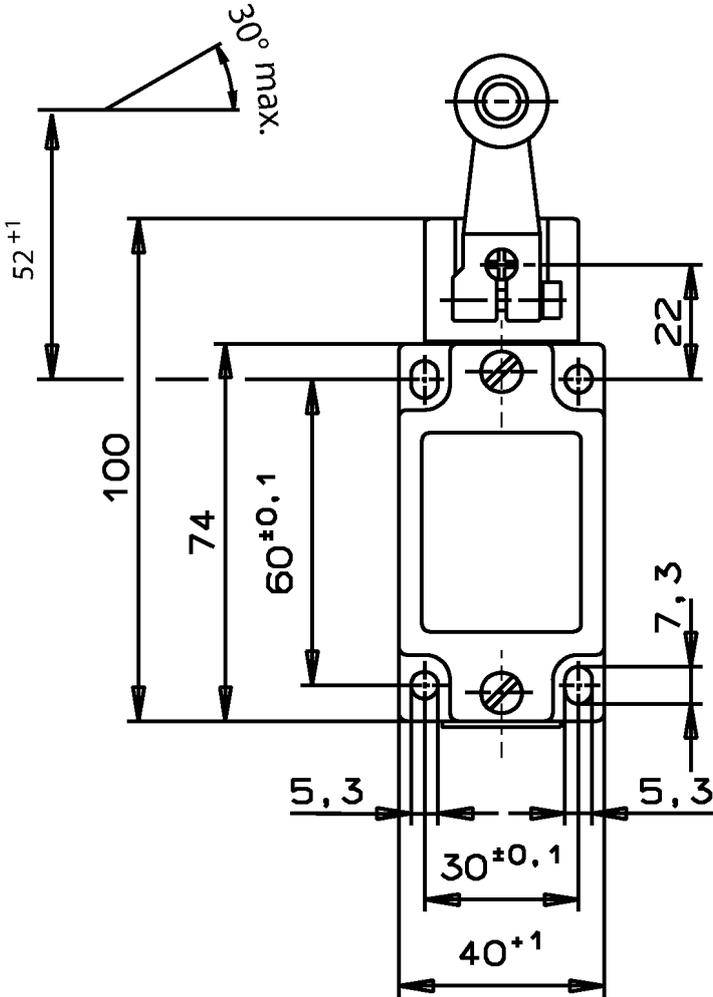

Connection examples

