


17POL CONINVERS/ZSM BAUSATZ (Order no. 106360)

Male flange connector RC17

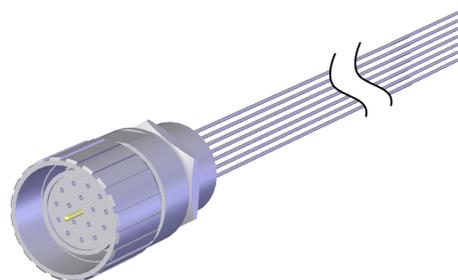

Male flange connector RC17

For connection, e.g. to enabling switches, pre-assembled.

Technical data

Electrical connection values

Connection cross section	0.14 mm ²
Rated voltage	150 V
Rated current I	8000 mA (per contact at 25 °C)
Screen connection	via housing connection

Mechanical values and environment

Conductor cross-section	0.14 mm ²
Number of conductors	23
Plug connector designation	RC17
Dynamic bending radius	10x cable diameter
Static bending radius	10x cable diameter
Storage temperature	-40 ... 105 °C
Cable type	straight
Cable length	0.18 m
Drag chain suitability	No
Cable ambient temperature (dynamic)	-20 ... 105 °C
Cable ambient temperature (static)	-40 ... 105 °C
Material	

Sheath not available

Connection 2

Conductor end	Flexible wires tinned
Connection type	flying lead
Connection type	flying lead
Cable outlet	straight
Number of pins	17
Plug lock	not available

Connection 1

Connection type	Plug connector
Connection type	Male plug

Cable outlet	straight
Number of pins	17
Degree of protection	IP67 (in the inserted and locked state)
Plug lock	Screw connection
Material	
	Plug housing Metal
	Plug lock CuZn or GD-Zn