


NOT-HALT TASTE 22MM 2 OE/ZUG (Order no. 073985)


EMERGENCY STOP device, 22 mm, with pull-to-reset button according to EN ISO 13850 for use in the housing HBL

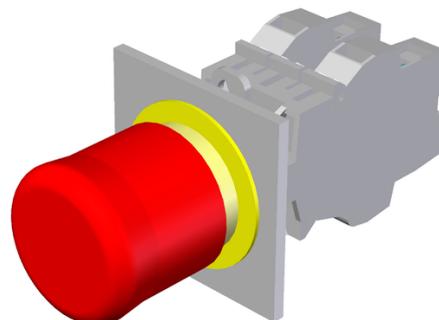

Notes

- ▶ For use in the housing HBL
- ▶ The EMERGENCY STOP device engages when actuated by pressing, unlocks when pulled, and is overload proof
- ▶ Use only for the following housings: HBL - 072 631, HBL - 072 983, HBL - 073 113, HBL - 083 484

Dimensional drawings

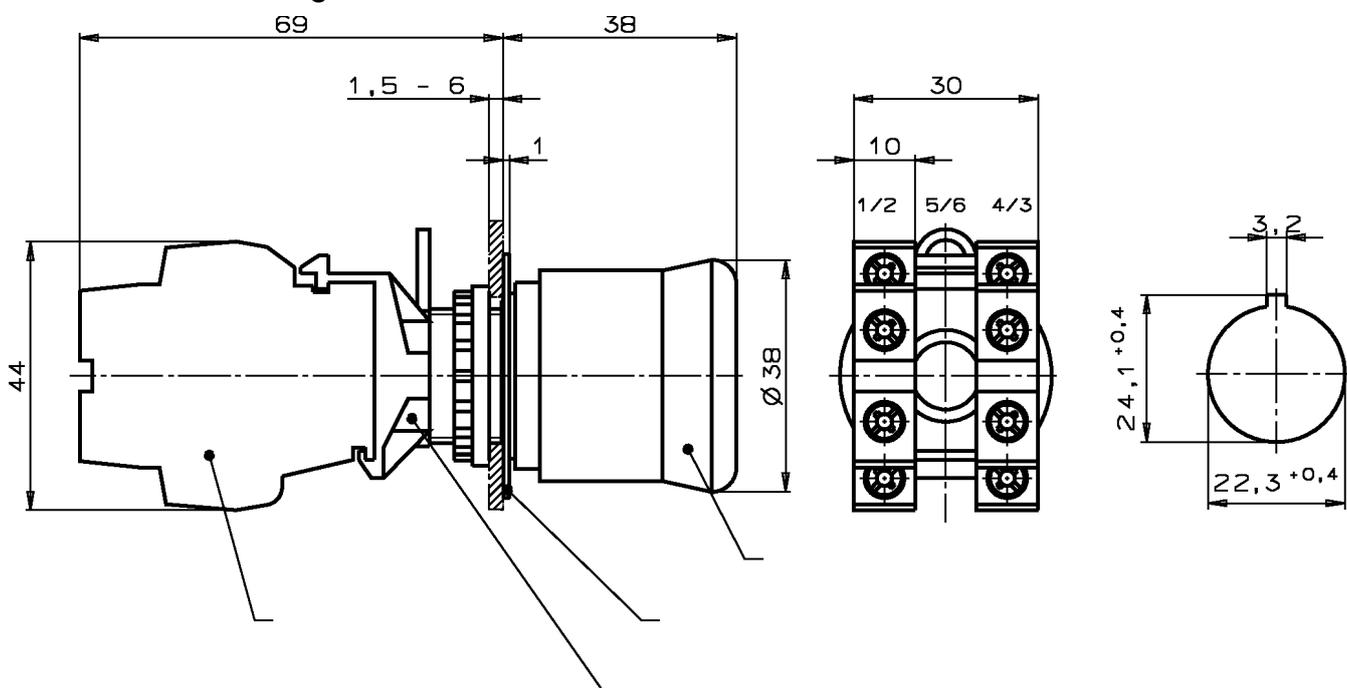

Technical data

Electrical connection values

| | |
|--------------------------------|-------|
| Rated insulation voltage U_i | 250 V |
|--------------------------------|-------|

Utilization category

DC-13 2.75 A 24 V

Mechanical values and environment

| | |
|------------------------------|---------------------------|
| Number of switching elements | 2 Normally closed contact |
|------------------------------|---------------------------|

| | |
|---------------------|---------------|
| Storage temperature | -25 ... 70 °C |
|---------------------|---------------|

| | |
|----------------------|------|
| Degree of protection | IP65 |
|----------------------|------|

Miscellaneous

| | |
|-------|--|
| Color | |
|-------|--|

| | |
|------------------|-----|
| Actuating button | red |
|------------------|-----|

| | |
|---------------|--------|
| Button socket | yellow |
|---------------|--------|

Downloads

All documentation for this material can be found on our website:

<https://www.euchner.de/en-us/a/073985/?#downloads-tab>