


## MGB-L2HB-PNA-L-121854 (Order no. 121854)

### Locking set MGB-L2...-PN... (guard locking by solenoid force) with 3 control elements, push-pull plug

- ▶ Guard locking with guard lock monitoring according to EN 1088
- ▶ Emergency stop according to ISO 13850, illuminated
- ▶ 2 illuminated pushbuttons
- ▶ including adhesive labels
- ▶ Push-pull plug
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ Unicode

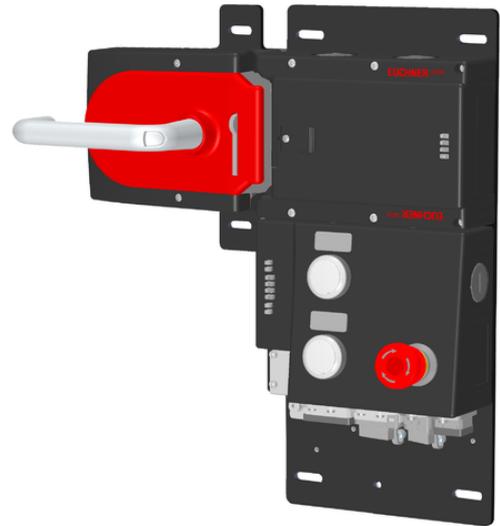

#### Profinet connection

Connection via push-pull plugs according to IEC 61076-3-117

#### Profinet RT switch

Point-to-point topology network structure due to integrated RT switch.

#### Flexible use as interlocking or guard locking

By means of the corresponding evaluation of the safe device data by the control system, use can be as either interlocking or guard locking (with or without monitoring).

#### Emergency stop illuminated

Emergency stop with illumination that can be controlled as required.