


NZ2VZ-2131E-9C-GMMF (Order no. 077363)

Safety switch NZ.VZ, plug connector MR9

- ▶ Plug connector MR9, 8-pin + PE
- ▶ 3 pos. driven contact
- ▶ 1 NO contacts



Approach direction



Horizontal

Can be adjusted in 90° steps


Switching element

2131H Slow-action switching contact 3 positively driven contacts $\ominus \rightarrow$ + 1 NO contact


Accessories required

Actuator is not included.

Functional drawings

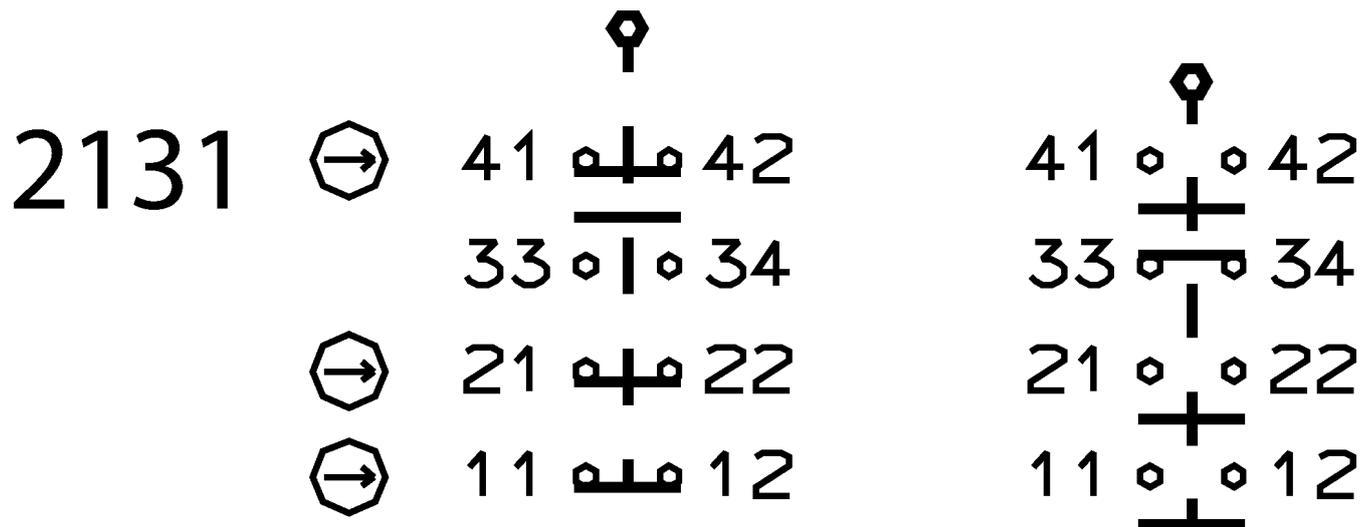

Dimensional drawings

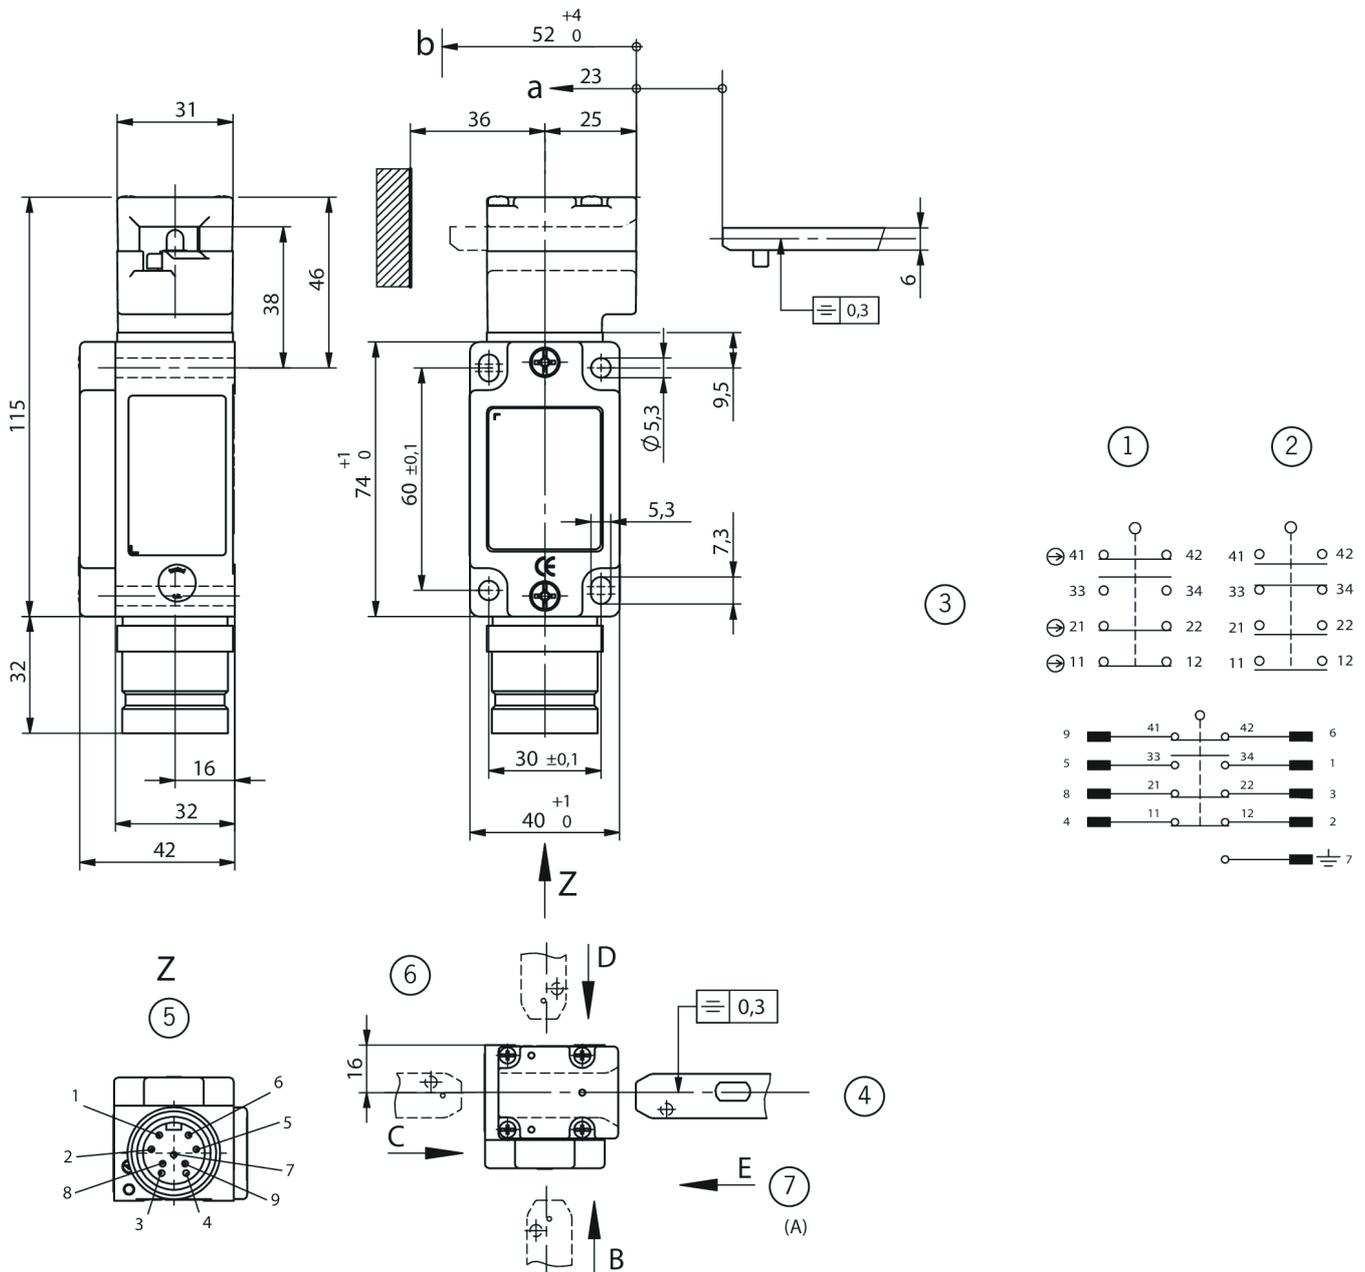

1 Actuator inserted

2 Actuator removed

3 Type: 2131H switching element: 3 NC + 1 NO

4 Order actuator separately. The safety switch and actuator must be placed together for attachment to the machine. Do not use actuator as an end stop. Limit overtravel separately.

5 Plug connector not aligned MENCOR (9-pin) MIN-9MR-1-18-M20

6 Actuating direction can be changed

7 Standard

a Travel without operation: actuator is in the guide slot, but function is not triggered.

b Switching operation completed: actuator must be inserted to this point to ensure safe switching. The actuator must be withdrawn at least to point a for switching off.