

CIS3AP10D05KH01K (Order no. 077785)

Data carrier CIS3A-Mini



- ▶ Cylindrical design, \varnothing 10 mm
- ▶ Unprogrammed



Mounting instructions

For fastening use e.g. two-component epoxy resin adhesive.

Dimensional drawings

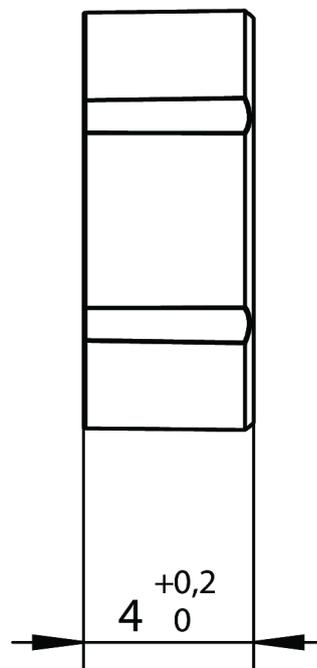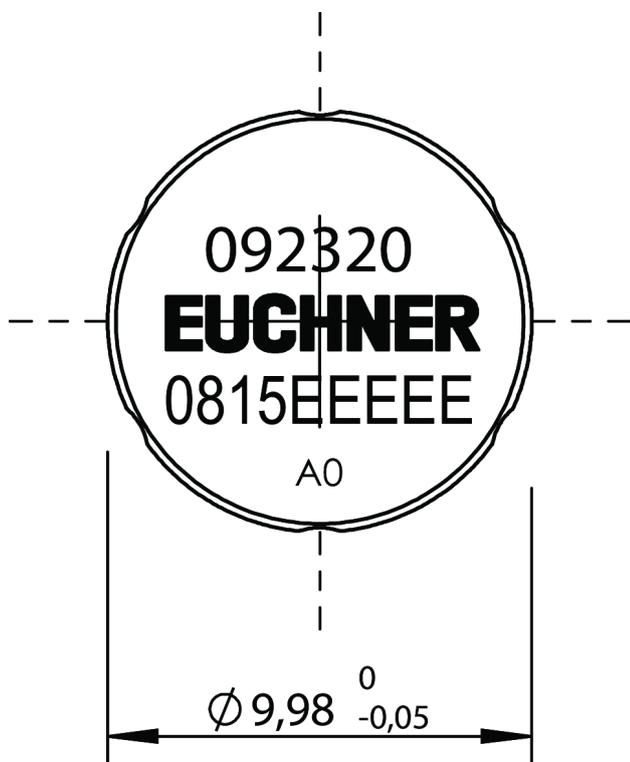

Technical data

Electrical connection values

Number of read cycles	not limited
Number of write cycles	max. 50000
Data retention time	max. 10 y at +22 °C
Length of serial number	8 Byte (Serial number read only)
Power supply	Inductive via read head
Storage capacity	116 Byte read/write

Mechanical values and environment

Storage temperature	-25 ... 70 °C
Mounting type	bonding, flush in metal
Degree of protection	IP67
Ambient temperature	-25 ... 70 °C
Material	
	Housing PPS – plastic

Downloads

All documentation for this material can be found on our website:

<https://www.euchner.de/en-us/a/077785/?#downloads-tab>