



## **EINBAULEUCHTE LED-F M20X1,5 (Order no. 095510)**

**Built-in LED, light shines to front**

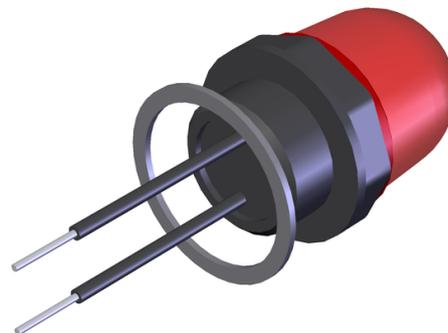

The built-in LED is suitable for direct installation in one of the M20 x 1.5 threads of the three cable entries of rope pull switch RPS and safety switches GP/TP/STP/STA. The built-in LED indicates to the operator whether the switch is actuated or not. The switching element can be wired individually. Operating voltage DC 24 V +10%, -15%.

Dimensional drawings

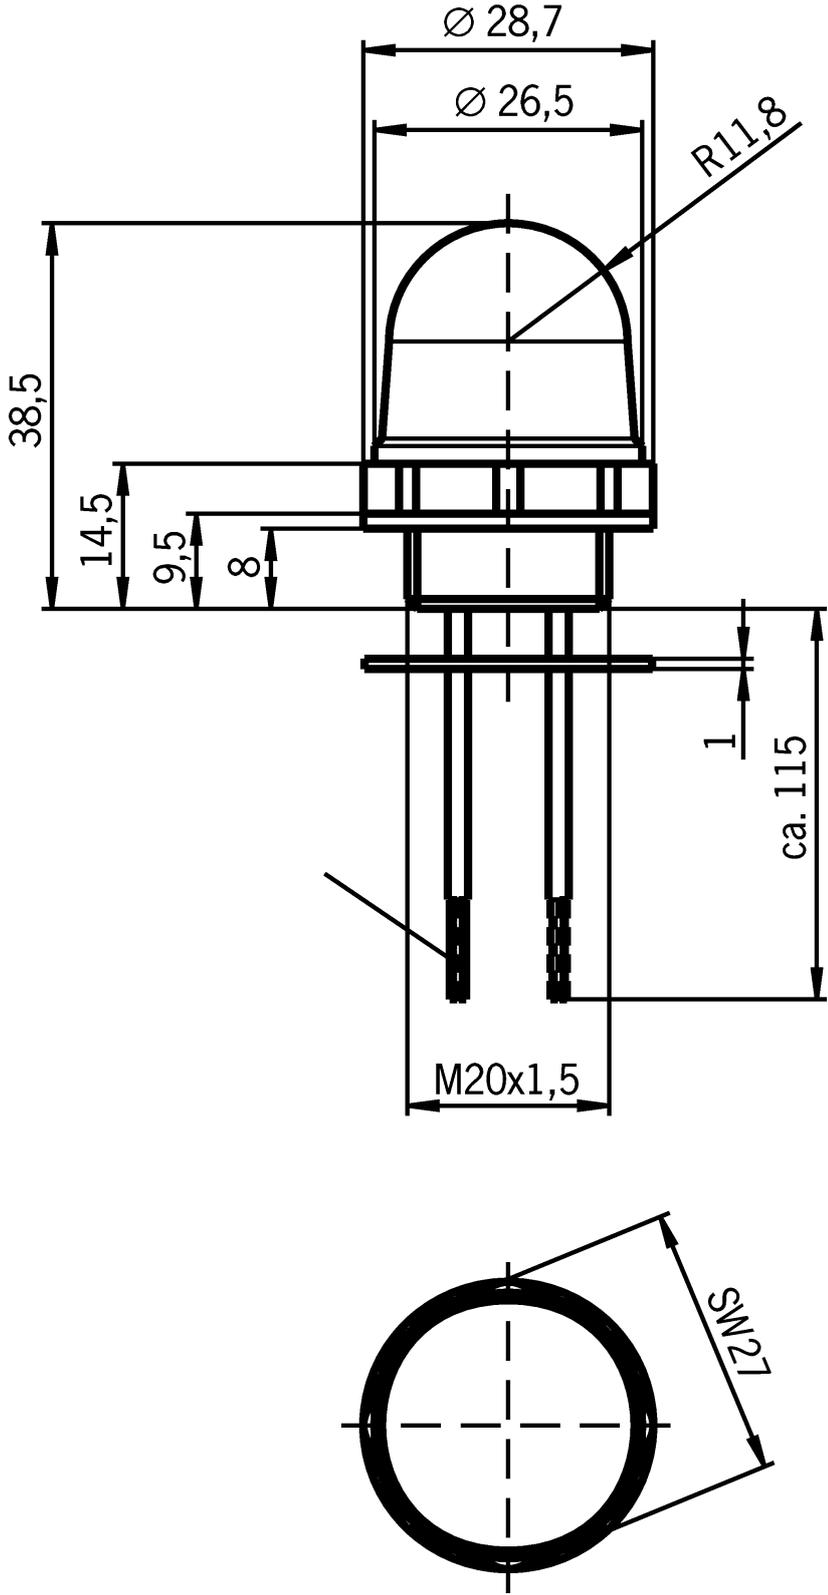

## Technical data

### Operating and display elements

LED display 1 LED, red

### Electrical connection values

Operating voltage

LED 24 V  
(LED with rectifier)

### Mechanical values and environment

Thread M20x1,5

Storage temperature -25 ... 70 °C

Degree of protection IP65

Material Plastic