


MGB-L1-ARA-AP7A1-M-L-121406 (Order no. 121406)

Locking module MGB-L1-ARA..., (guard locking by spring force) with 2 pushbutton, emergency stop, selector switch

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Emergency stop according to ISO 13850
- ▶ 2 pushbuttons (illuminated)
- ▶ With lens set, 6 pcs.
- ▶ Selector switch (form V, 90°)
- ▶ With cable entry
- ▶ Unicode

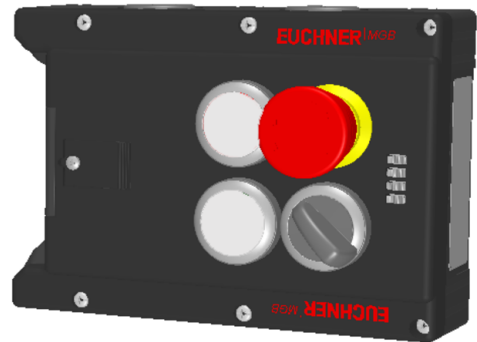

Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force
L1... (closed-circuit current principle, mechanically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault

Emergency stop device

S1 2 positively driven contacts and 1 NO contact (e.g. monitoring contact), emergency stop with turn-to-reset, not illuminated

Pushbuttons

- S2 1 NO contact, illuminated
- S3 1 NO contact, illuminated

Selector switch

S4 Selector switch with 2 positions (form V, 90°). The switch latches in both positions